

LED

Panels

PLT &



FEATURES


- Equipped standard with a 0-10V continuous dimming driver that's compatible with 0-10V controllers/dimmers
- Unique optics guide plate controls glare and provides uniform light distribution
- Long life, 60,000 hour LEDs at L80 reduce life cycle maintenance costs
- Low profile aluminum housing, 2" depth including transformer panel
- Fits standard T-Bar and narrow grid drop ceiling
- ETL damp location rated



SKU #	Kelvin	Lumens	Size	Wattage	Voltage	DLC?	Mounting	Life Hours	Warranty
-------	--------	--------	------	---------	---------	------	----------	------------	----------

PLTG1323	5000	5861	2x4	50	120-277	YES	CEILING	60000	5 years
----------	------	------	-----	----	---------	-----	---------	-------	---------

ADDITIONAL PHOTOS

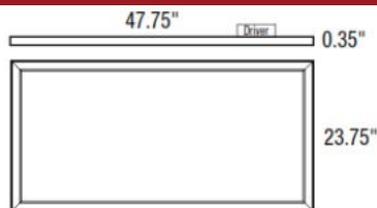

2' x 4' Edge-Lit LED Panel
Width: 24"
Length: 48"
Height: 0.35"
2.35" w/Driver mounted



FEATURES

- Extruded aluminum housing
- smooth opalescent acrylic lens
- Suspended/surface mounting accessories sold separately

TYPICAL APPLICATIONS

- Schools, Factories, Hotels
- Office, Conference Rooms
- Hospitals

WARRANTY

Warranty

5 Years

SPECIFICATIONS

Dimmable	Yes
DLC Listed	Yes
Safety Rating	ETL
CRI	80
Color.....	Daylight White
Color Temperature.....	5000 Kelvin
Life Hours	60,000
Wattage	50 Watt
Lumens.....	5861
Voltage	120-277
Finish.....	White
Housing	Aluminum
Mounting	Ceiling Grid Mount
Lens	Opaque
Length	47.75 in.
Height	0.35 in.
Width	23.75 in.
Weight.....	14 lbs.
Warranty.....	5 Years