



WARNING



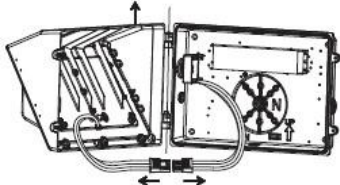
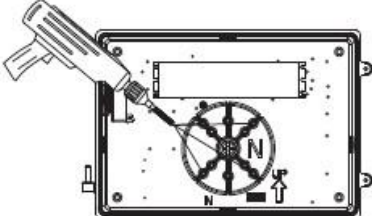
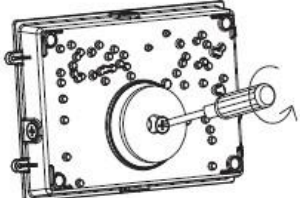
- Installation, service, and maintenance of luminaries should be performed by a qualified licensed electrician.

CAUTION

- Do not use an electric generator to test this LED fixture.
- If smoke or fire occurs during or after installation, turn off the power immediately and contact a licensed electrician.
- This fixture is suitable for outdoor use. The recommended minimum distance from the fixture to the ground is 6.6 feet (2 meters).

Installation Instructions

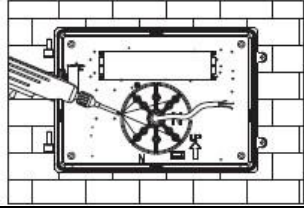
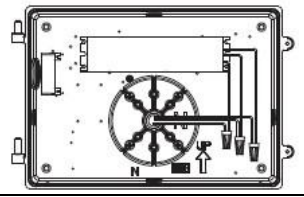
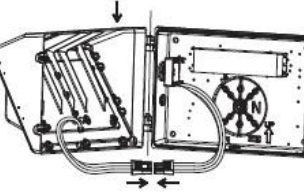
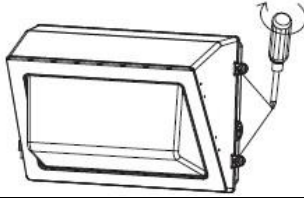

Junction Box Mounting

1. Turn the main power OFF.	
2. Use a screwdriver to remove the screws on both sides of the fixture.	
3. Open the fixture, disconnect the connection terminals, and remove the upper cover from the fixture.	
4. Drill through the four mounting holes with an electric drill.	
5. Attach EVA foam pad (included) to the base of the fixture so the plug is aligned with the center of the pad. Use a screwdriver to remove the plug.	





COLOR/WATTAGE/BEAM ANGLE SELECTABLE LED WALL PACK W/ PHOTOCELL

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

<p>6. Attach the base of the fixture to the mounting seat with screws (not provided).</p>	
<p>7. Connect corresponding positive, negative, and ground wires of the driver's output wires to the LED board according to the wiring diagram (see Wiring Diagram section).</p> <p>If dusk to dawn operation is not desired, disable the photocell as shown in the Photocell section.</p>	
<p>8. Reconnect the terminals.</p>	
<p>9. Close the front cover of the fixture and reattach it with the screws.</p>	
<p>10. Select the desired wattage, color temperature, and beam angle using the DIP switches (See CCT, Wattage, Beam Angle Adjustable section on pg. 5). Make sure that the installation is complete before turning the power back on.</p> <p>Note: The fixture must be turned off when selecting the beam angle, CCT, and/or wattage.</p>	

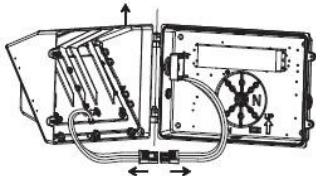
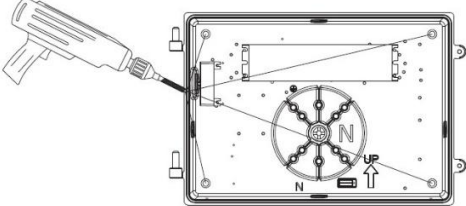
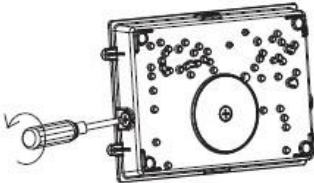
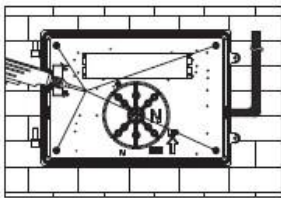
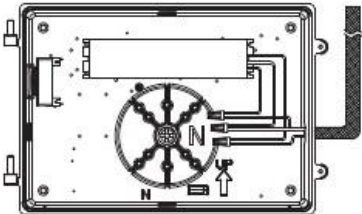
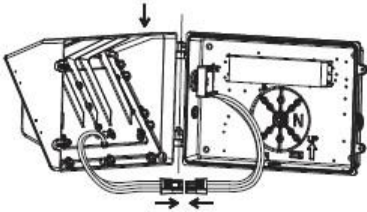

Conduit Mounting

<p>1. Turn the main power OFF.</p>	
<p>2. Use a screwdriver to remove the screws on both sides of the fixture.</p>	



COLOR/WATTAGE/BEAM ANGLE SELECTABLE LED WALL PACK W/ PHOTOCELL

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

<p>3. Open the fixture, disconnect the connection terminals, and remove the upper cover from the fixture.</p>	
<p>4. Drill through the four mounting holes with an electric drill.</p>	
<p>5. Use a screwdriver to remove the plug located on the side of the fixture.</p>	
<p>6. Attach the base of the fixture to the mounting seat with screws (not provided).</p>	
<p>7. Connect corresponding positive, negative, and ground wires according to the wiring diagram (see Wiring Diagram section).</p> <p>If dusk to dawn operation is not desired, disable the photocell as shown in the Photocell section.</p>	
<p>8. Reconnect the terminals.</p>	
<p>9. Close the front cover of the fixture and reattach it with the screws.</p>	




COLOR/WATTAGE/BEAM ANGLE SELECTABLE LED WALL PACK W/ PHOTOCELL

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

10. Select the desired wattage, color temperature, and beam angle using the DIP switches (See CCT, Wattage, Beam Angle Adjustable section on pg. 5). Make sure that the installation is complete before turning the power back on.

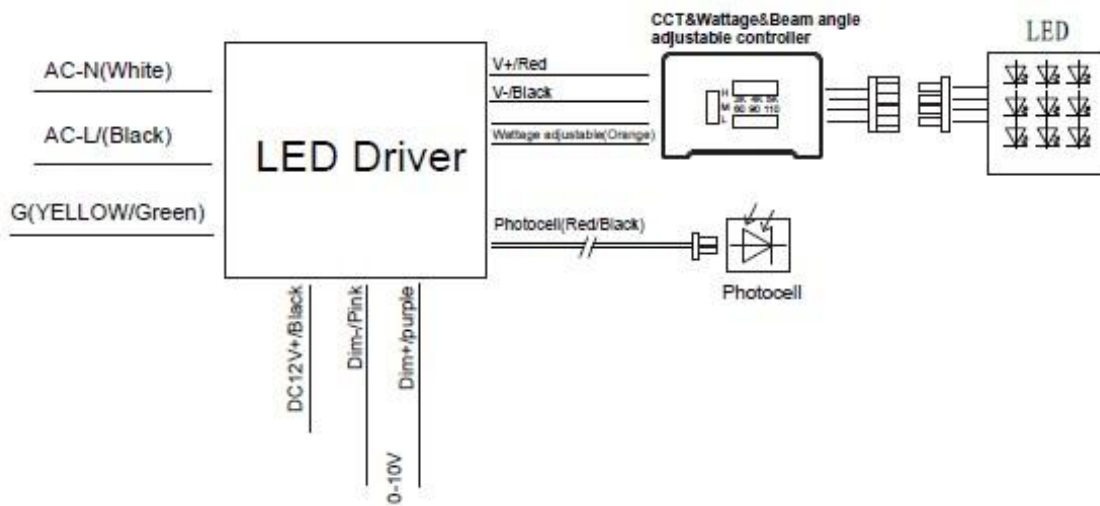
Note: The fixture must be turned off when selecting the beam angle, CCT, and/or wattage.



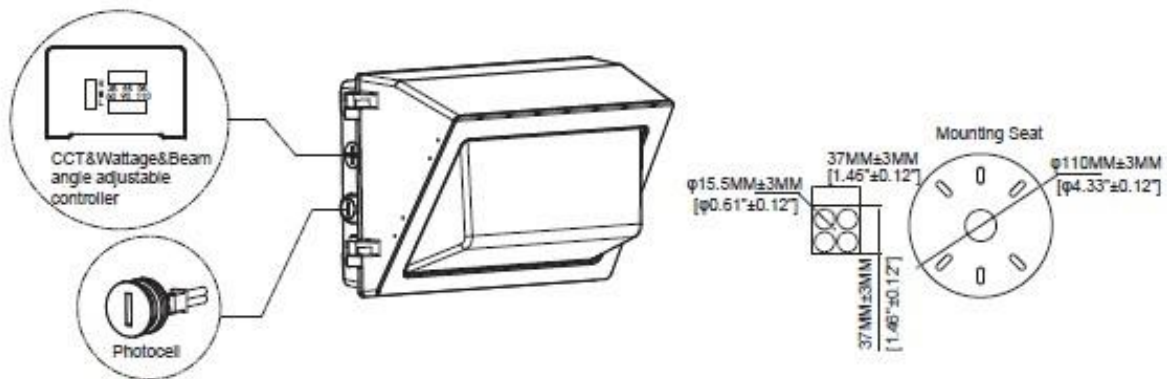
Wiring Diagram

L/Live Wire: Black\Brown
 N/Null Wire – White\Blue
 Ground Wire: Green\Yellow-Green

Warning: During grounding, make sure the earth wire of the driver and fixture housing are connected together with the earth wire of the local power supply.



Drill Pattern



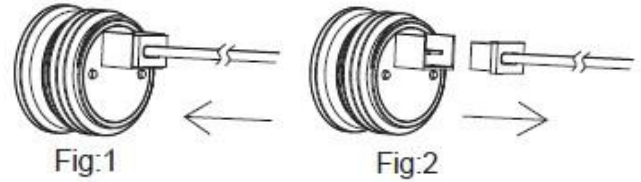


Photocell

Under the fixture's cover, locate the male and female connectors adjacent to the 1/2" plug covering the photocell on the side of the fixture.

Connecting the male and female connectors will activate the photocell function (Fig:1).

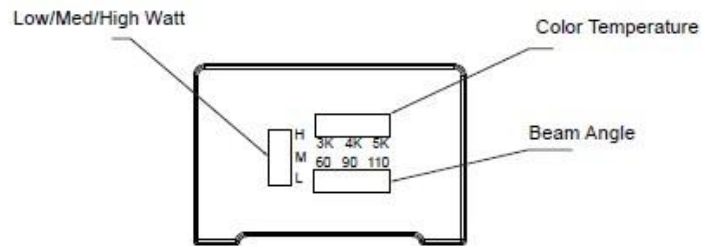
Disconnecting the male and female connectors will deactivate the photocell function (Fig:2).



CCT, Wattage, Beam Angle Adjustable

Unscrew the 3/4" plug on the side of the fixture to reveal the three switches for color temperature, wattage, and beam angle.

Note: The power must be off before making any selections.



CCT&Wattage&Beam angle adjustable controller

Color Temperature Selection

- 3K = 3000K
- 4K = 4000K
- 5K = 5000K

Wattage Selection

- The power of the lamp will be changed accordingly when the DIP switch is set to L, M, or H
- Adjustable wattage range: 25% to 100%

Maximum Rated Wattage	Wattage Selections
80W	40W, 60W, 80W
120W	80W, 100W, 120W

Beam Angle Selection

- The beam angle of the fixture will be changed accordingly when the DIP switch is set to 60, 90, or 110.

Fixture Default Settings

- 80W Max – 80W, 5000K, 90°
- 120W Max – 120W, 5000K, 90°



⚠ WARNING

- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards, read all warnings and instructions included with and on the fixture box and all fixture labels.
- Proper grounding is required to ensure safety.
- Power must be turned off at the breaker before installation or maintenance.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Wear gloves and eye protection at all times while installing, servicing, or performing maintenance on the luminaire, and avoid direct eye exposure to the light source while it is on.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not install damaged product. Inspect luminaire for damage that may have occurred during transit. If damaged, contact the manufacturer immediately.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purposes, contact the manufacturer.

⚠ ADVERTENCIA

- Antes de instalar, reparar o realizar el mantenimiento de rutina de este equipo, siga estas precauciones generales.
- Para reducir el riesgo de muerte, lesiones personales o daños a la propiedad por fuego, descarga eléctrica, caída de piezas, cortes / abrasiones y otros peligros, lea todas las advertencias y instrucciones incluidas con y en la caja del dispositivo y todas las etiquetas del dispositivo.
- Se requiere una conexión a tierra adecuada para garantizar la seguridad.
- Se debe apagar la energía en el disyuntor antes de la instalación o el mantenimiento.
- Este producto debe ser instalado de acuerdo con el código de instalación aplicable por una persona familiarizada con la construcción y operación del producto y los peligros involucrados.
- Utilice guantes y protección para los ojos en todo momento durante la instalación, el servicio o el mantenimiento de la luminaria, y evite la exposición directa de los ojos a la fuente de luz mientras está encendida.
- Para evitar daños o abrasiones en el cableado, no exponga el cableado a bordes de láminas de metal u otros objetos afilados.
- No instale un producto dañado. Inspeccione la luminaria en busca de daños que puedan haber ocurrido durante el tránsito. Si está dañado, comuníquese con el fabricante de inmediato.
- Estas instrucciones no pretenden cubrir todos los detalles o variaciones en el equipo ni proporcionar todas las posibles contingencias a cumplir en relación con la instalación, operación o mantenimiento. Si desea obtener más información o si surgen problemas particulares que no están suficientemente cubiertos para los propósitos del comprador o propietario, comuníquese con el fabricante.