



COLOR/WATTAGE/BEAM ANGLE SELECTABLE LINEAR LED HIGH BAY

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS


WARNING

- Installation, service, and maintenance of luminaires should be performed by a qualified licensed electrician.
- Check the fixture for any damage or missing accessories. If the fixture is damaged or missing accessories, contact the manufacturer.

CAUTION

- If wiring smokes or sparks, turn off power immediately and contact a licensed electrician.
- Use a listed strain relief bushing when connecting the supply cord to the outlet box.

Installation Instructions

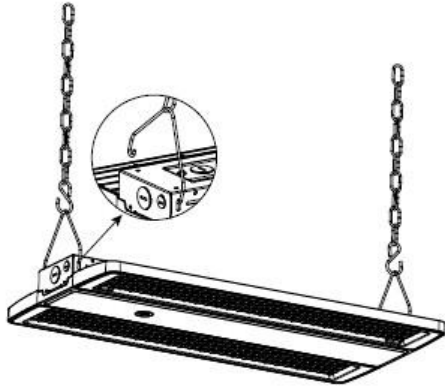Included Hardware	Hardware Sold Separately
 Chain*2	 PIR Sensor PLT-13121
 Hook*2	 Motion Sensor PLT-12844
 Wire Nut*3	
Suspension w/ Chain <i>Note: Turn off power from the AC MAIN power supply prior to installation.</i> 1. Install the V-hooks onto the top of the fixture by inserting each hook through the pair of holes located at both ends of the driver housing. 2. Attach each hook to each of the chains (Figure 1). 3. Secure both chains to the mounting surface. 4. Remove the wiring access plate from the top of the fixture's driver housing, then remove the 1/2" knockout best positioned for your installation. 5. Insert the conduit through the knockout hole, then connect the wires according to the wiring diagram (see Wiring Diagram section). 6. Reattach the wiring access plate. 7. Make adjustments to field-selectable settings per your requirements (see Field-Adjustable Wattage, CCT, and Beam Angle section). 8. Restore AC MAIN power.	 Figure 1




COLOR/WATTAGE/BEAM ANGLE SELECTABLE LINEAR LED HIGH BAY

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

Wiring Diagram

L – Black
N – White
⊕ – Green/Yellow
Dim+ – Purple
Dim- – Pink

This fixture can be dimmed using 0-10V dimmers. If not using the dimming feature, be sure to cap the dimming wires with UL listed wire nuts.

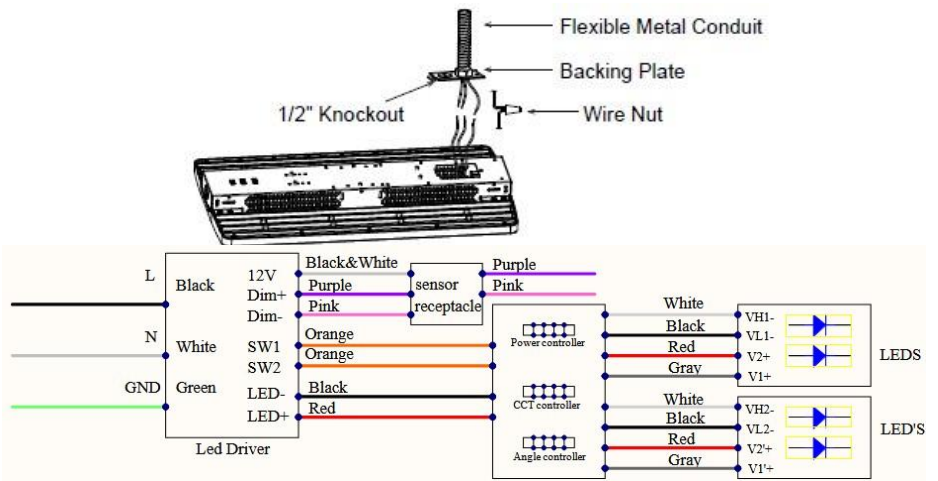

Note: This fixture cannot be connected to a dimming device when a motion sensor is installed.

Field-Adjustable Wattage, CCT, and Beam Angle

Each slider switch offers three selections (see switch markings on the fixture). Adjust the color temperature, wattage, or beam angle to the desired setting by sliding the switch to the left, middle, or right (Figure 2).

Note: Prior to installation, turn off power at the AC main power supply or circuit breaker. Select color temperature, wattage, and beam angle before restoring power

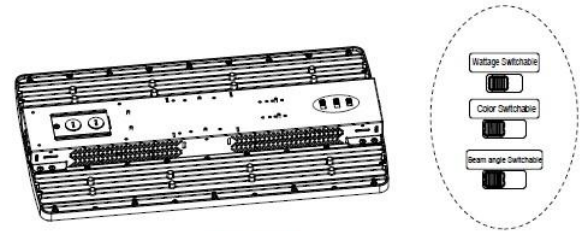


Figure 2

Wattage, CCT, and Beam Angle Options

SKU	Wattage Selection	Color Temperature Selections	Beam Angle Selections
PLT-13634	110W, 130W, 160W	3500K, 4000K, 5000K	45°x100°, 65°x95°, 90°x90°
PLT-13635	180W, 220W, 240W	3500K, 4000K, 5000K	45°x100°, 65°x95°, 90°x90°

Default Settings

- PLT-13634: 160W, 5000K, 45°x100°
- PLT-13635: 240W, 5000K, 45°x100°

**DC Motion Sensor (PLT-12844) / PIR Sensor (PLT-13121)**

1. Using a screwdriver, remove the 1/2" plug located between the fixture's two lenses to reveal a socket (Figure 3).
2. Twist-lock the DC sensor to the socket (Figure 4).




Figure 3




Figure 4

Compatible Dimmers

Recommended 0-10V dimmers:

- LUTRON NTSTV-DV
- LEVITON DS710-10Z
- LEVITON IP710
- LEGRAND RH4FBL3PW

⚠ WARNING

- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards, read all warnings and instructions included with and on the fixture box and all fixture labels.
- Proper grounding is required to ensure safety.
- Power must be turned off at the breaker before installation or maintenance.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Wear gloves and eye protection at all times while installing, servicing, or performing maintenance on the luminaire, and avoid direct eye exposure to the light source while it is on.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not install damaged product. Inspect luminaire for damage that may have occurred during transit. If damaged, contact the manufacturer immediately.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purposes, contact the manufacturer.

⚠ ADVERTENCIA

- Antes de instalar, reparar o realizar el mantenimiento de rutina de este equipo, siga estas precauciones generales.
- Para reducir el riesgo de muerte, lesiones personales o daños a la propiedad por fuego, descarga eléctrica, caída de piezas, cortes / abrasiones y otros peligros, lea todas las advertencias y instrucciones incluidas con y en la caja del dispositivo y todas las etiquetas del dispositivo.



COLOR/WATTAGE/BEAM ANGLE SELECTABLE LINEAR LED HIGH BAY

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

- Se requiere una conexión a tierra adecuada para garantizar la seguridad.
- Se debe apagar la energía en el disyuntor antes de la instalación o el mantenimiento.
- Este producto debe ser instalado de acuerdo con el código de instalación aplicable por una persona familiarizada con la construcción y operación del producto y los peligros involucrados.
- Utilice guantes y protección para los ojos en todo momento durante la instalación, el servicio o el mantenimiento de la luminaria, y evite la exposición directa de los ojos a la fuente de luz mientras está encendida.
- Para evitar daños o abrasiones en el cableado, no exponga el cableado a bordes de láminas de metal u otros objetos afilados.
- No instale un producto dañado. Inspeccione la luminaria en busca de daños que puedan haber ocurrido durante el tránsito. Si está dañado, comuníquese con el fabricante de inmediato.
- Estas instrucciones no pretenden cubrir todos los detalles o variaciones en el equipo ni proporcionar todas las posibles contingencias a cumplir en relación con la instalación, operación o mantenimiento. Si desea obtener más información o si surgen problemas particulares que no están suficientemente cubiertos para los propósitos del comprador o propietario, comuníquese con el fabricante.