



WARNING

- Installation, service, and maintenance of luminaires should be performed by a qualified licensed electrician.

CAUTION


- This fixture must be wired in accordance with the National Electric Code (NEC) and applicable local codes and ordinances.
- Tighten all fixture components to their industry-recommended torque values.

Installation Instructions

Turn OFF the AC power supply from the breaker panel before installation begins.


- Step 1. Remove the screws located on the side of the wall pack to open the fixture, then separate the male and female connectors. Remove the selected knockout plug, pull supply wires through it, and wire the fixture to the power supply (See Wiring Diagrams).
- Step 2. Attach the rear housing to the J-box (Method 1) or wall (Method 2).

Method 1: Remove the pre-cast locators on the back of the housing and secure the fixture to the standard junction box using four screws (not provided).

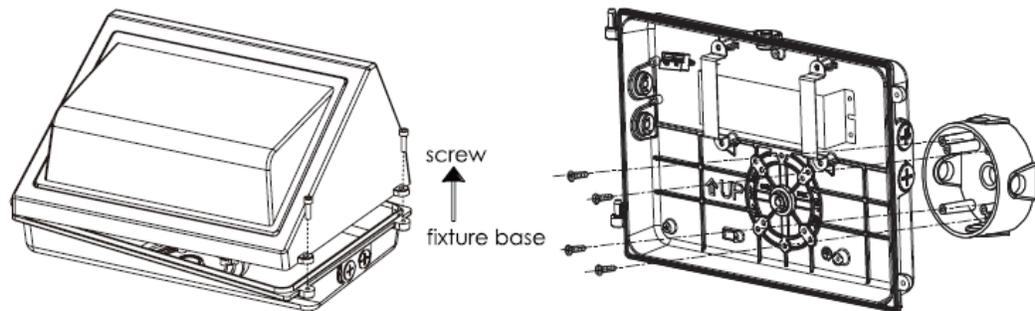

Images are for reference only; actual fixture may vary slightly.

Method 2: Drill pilot holes at the required three mounting points on the wall. Secure the fixture to the wall using mounting screws (not provided), then seal the screw heads with appropriate waterproofing material.

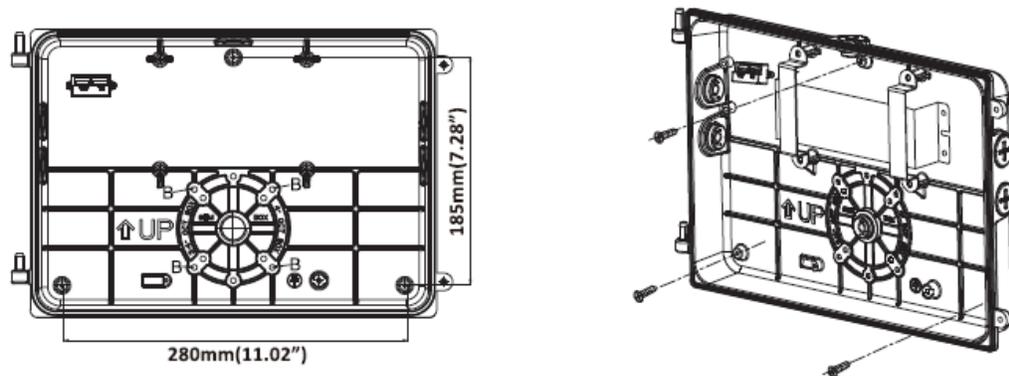


Images are for reference only; actual fixture may vary slightly.



COLOR/WATTAGE SELECTABLE LED WALL PACK

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

Step 3. Connect the male and female connectors together. Use the DIP switches to select the required CCT and power selections before returning power to the fixture.

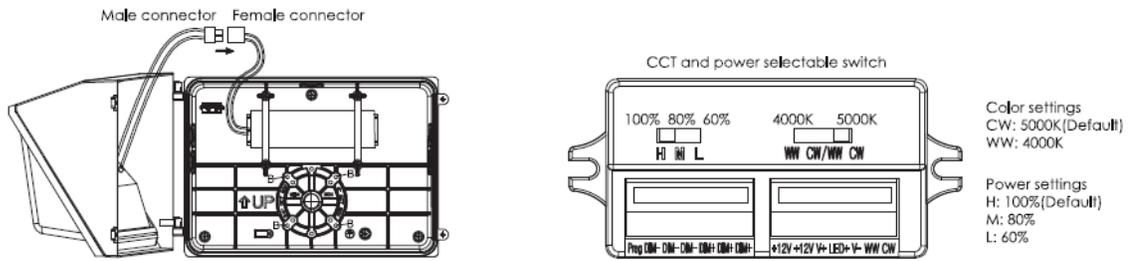


Images are for reference only; actual fixture may vary slightly.

Step 4. Remove the two drain plugs from the housing. Close the fixture and re-insert the screws on the side of the fixture until secured in place.

Step 5. Make sure all wiring access holes are sealed properly for waterproofing purposes.


Step 6. Return the supply power to the fixture.

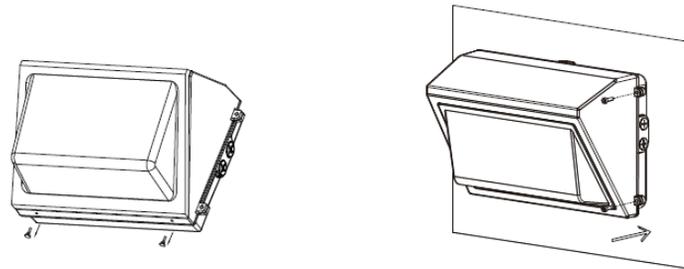


Images are for reference only; actual fixture may vary slightly.

Wiring Diagrams

Without Photocell

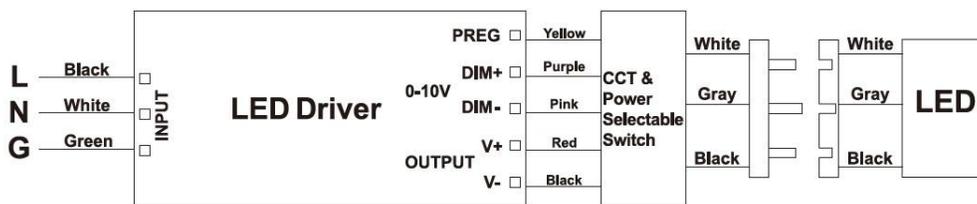

With Photocell

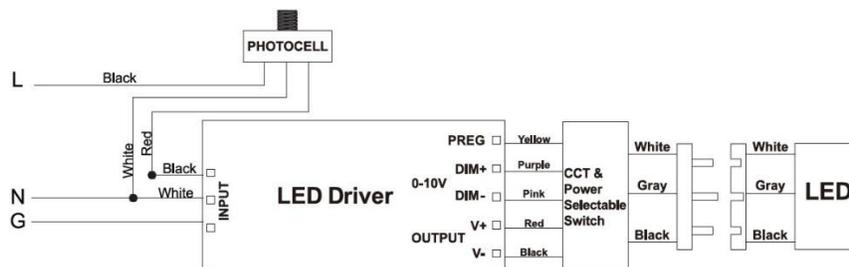

**⚠ WARNING**

- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards, read all warnings and instructions included with and on the fixture box and all fixture labels.
- Proper grounding is required to ensure safety.
- Power must be turned off at the breaker before installation or maintenance.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Wear gloves and eye protection at all times while installing, servicing, or performing maintenance on the luminaire, and avoid direct eye exposure to the light source while it is on.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not install damaged product. Inspect luminaire for damage that may have occurred during transit. If damaged, contact the manufacturer immediately.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purposes, contact the manufacturer.

⚠ ADVERTENCIA

- Antes de instalar, reparar o realizar el mantenimiento de rutina de este equipo, siga estas precauciones generales.
- Para reducir el riesgo de muerte, lesiones personales o daños a la propiedad por fuego, descarga eléctrica, caída de piezas, cortes / abrasiones y otros peligros, lea todas las advertencias y instrucciones incluidas con y en la caja del dispositivo y todas las etiquetas del dispositivo.
- Se requiere una conexión a tierra adecuada para garantizar la seguridad.
- Se debe apagar la energía en el disyuntor antes de la instalación o el mantenimiento.
- Este producto debe ser instalado de acuerdo con el código de instalación aplicable por una persona familiarizada con la construcción y operación del producto y los peligros involucrados.
- Utilice guantes y protección para los ojos en todo momento durante la instalación, el servicio o el mantenimiento de la luminaria, y evite la exposición directa de los ojos a la fuente de luz mientras está encendida.
- Para evitar daños o abrasiones en el cableado, no exponga el cableado a bordes de láminas de metal u otros objetos afilados.
- No instale un producto dañado. Inspeccione la luminaria en busca de daños que puedan haber ocurrido durante el tránsito. Si está dañado, comuníquese con el fabricante de inmediato.
- Estas instrucciones no pretenden cubrir todos los detalles o variaciones en el equipo ni proporcionar todas las posibles contingencias a cumplir en relación con la instalación, operación o mantenimiento. Si desea obtener más información o si surgen problemas particulares que no están suficientemente cubiertos para los propósitos del comprador o propietario, comuníquese con el fabricante.