



LED READY WRAPAROUND FIXTURE

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

WARNING

- Installation, service, and maintenance of luminaires should be performed by a qualified licensed electrician.
- Specifications and dimensions are subject to change without notice.




CAUTION

- This luminaire operates LED lamps only. Do not attempt to install or operate fluorescent lamps in this luminaire.
- Do not make or alter any open holes in the wiring enclosure or electrical components during installation.
- Verify that supply voltage is correct by comparing it with the luminaire label.
- All wiring connections should be capped with UL approved wire connectors.
- The green ground screw is in the proper locations. Do not relocate.
- Minimum 90°C supply conductors.
-

NOTE

- Suitable for dry or damp locations.

Installation Instructions

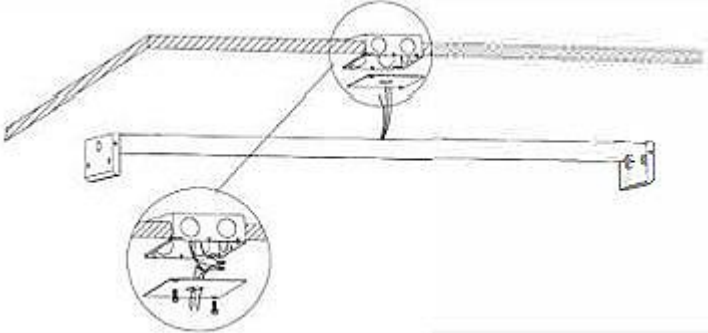
<p>1. Remove the fixture from packaging and carefully inspect it for damage. If the fixture is damaged or missing any components, contact the manufacturer.</p>	
<p>2. Remove the lens and wiring cover.</p>	
<p>3. Turn off power at the circuit breaker before installing or servicing.</p> <p>Using the fixture housing as a template, position the center hole over the electrical junction box. Mark the pilot holes through the screw mounting holes found at each end of the housing. Set the housing aside, drill the pilot holes, and insert anchors suitable for the mounting surface (not provided).</p> <p>Realign the housing to the electrical junction box and anchor holes. Pass the electrical supply wires through the center hole and secure the fixture to the mounting surface using screws suitable for the mounting surface (not provided).</p>	



LED READY WRAPAROUND FIXTURE

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS


- Connect the fixture wiring to the supply wires according to the wiring diagram below. Use only UL-approved connectors or wire nuts (not provided).

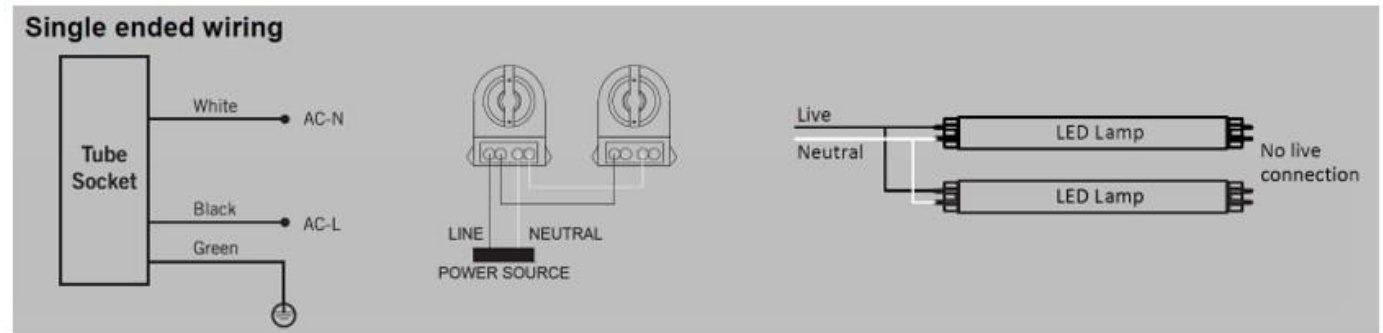


- Push wires into the junction box and reinstall the wiring cover.




- Before installing the LED tube lamps, ensure the powered input end of each tube lamp is inserted into a powered lamp holder.

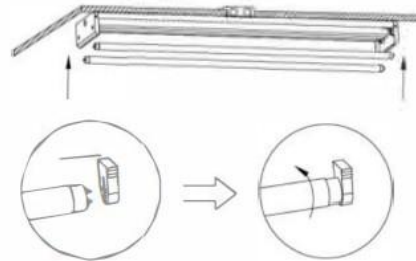

- Re-install the lens on one side of the fixture and rotate to engage the opposite side.

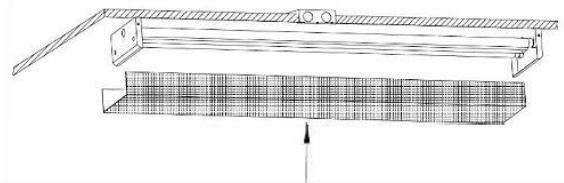

- The installation is complete. Return the power from the circuit breaker panel.



⚠ WARNING

- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.



LED READY WRAPAROUND FIXTURE

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

- To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards, read all warnings and instructions included with and on the fixture box and all fixture labels.
- Proper grounding is required to ensure safety.
- Power must be turned off at the breaker before installation or maintenance.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Wear gloves and eye protection at all times while installing, servicing, or performing maintenance on the luminaire, and avoid direct eye exposure to the light source while it is on.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not install damaged product. Inspect luminaire for damage that may have occurred during transit. If damaged, contact the manufacturer immediately.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purposes, contact the manufacturer.

⚠ ADVERTENCIA

- Antes de instalar, reparar o realizar el mantenimiento de rutina de este equipo, siga estas precauciones generales.
- Para reducir el riesgo de muerte, lesiones personales o daños a la propiedad por fuego, descarga eléctrica, caída de piezas, cortes / abrasiones y otros peligros, lea todas las advertencias y instrucciones incluidas con y en la caja del dispositivo y todas las etiquetas del dispositivo.
- Se requiere una conexión a tierra adecuada para garantizar la seguridad.
- Se debe apagar la energía en el disyuntor antes de la instalación o el mantenimiento.
- Este producto debe ser instalado de acuerdo con el código de instalación aplicable por una persona familiarizada con la construcción y operación del producto y los peligros involucrados.
- Utilice guantes y protección para los ojos en todo momento durante la instalación, el servicio o el mantenimiento de la luminaria, y evite la exposición directa de los ojos a la fuente de luz mientras está encendida.
- Para evitar daños o abrasiones en el cableado, no exponga el cableado a bordes de láminas de metal u otros objetos afilados.
- No instale un producto dañado. Inspeccione la luminaria en busca de daños que puedan haber ocurrido durante el tránsito. Si está dañado, comuníquese con el fabricante de inmediato.
- Estas instrucciones no pretenden cubrir todos los detalles o variaciones en el equipo ni proporcionar todas las posibles contingencias a cumplir en relación con la instalación, operación o mantenimiento. Si desea obtener más información o si surgen problemas particulares que no están suficientemente cubiertos para los propósitos del comprador o propietario, comuníquese con el fabricante.