



COLOR SELECTABLE ARCHITECTURAL LED LINEAR FIXTURE

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

WARNING

- Installation, service, and maintenance of luminaires should be performed by a qualified licensed electrician.
- Risk of burn. Disconnect power and allow fixture to cool before handling fixture.
- Account for small parts and destroy packing material, as these may be hazardous to children.

CAUTION

- All wiring connections should be capped with UL approved wire connectors.
- Do not create any new or alter any existing holes.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- Minimum 90° supply conductors.

NOTICE


- Specifications and dimensions are subject to change without notice.
- Suitable for dry or damp location.

Light Distribution Breakdown

Fixtures w/ Up/Down Lighting (70% Direct Light, 30% Indirect Light)		Fixtures w/ Down Lighting Only (100% Direct Light)
• PLT-90271	• PLT-80073	• PLT-80071
• PLT-90272	• PLT-80074	• PLT-80088
• PLT-90273	• PLT-80075	• PLT-80089
• PLT-90274	• PLT-80076	
• PLT-90275	• PLT-80087	
• PLT-90276	• PLT-80090	
• PLT-90376	• PLT-80091	
• PLT-80072	• PLT-80092	

Installation Instructions







Single Pendant Mounting to Drywall Ceiling

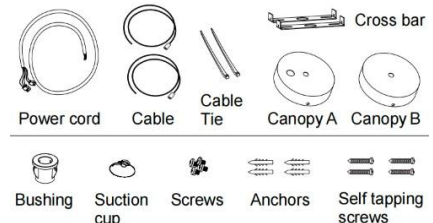1. Take the fixture and accessories out of the box.	
---	---



COLOR SELECTABLE ARCHITECTURAL LED LINEAR FIXTURE

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

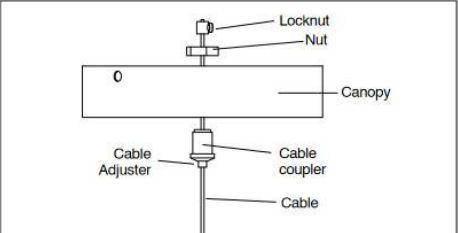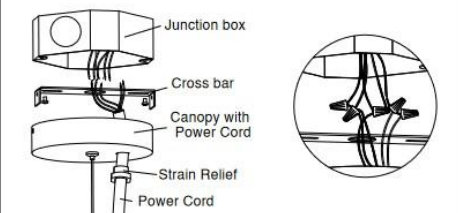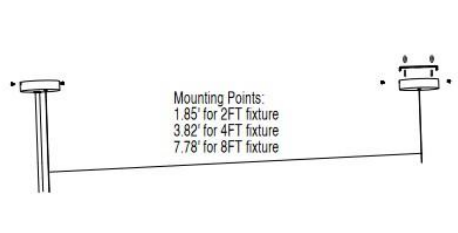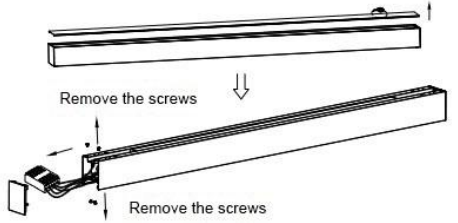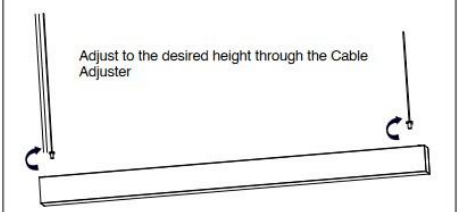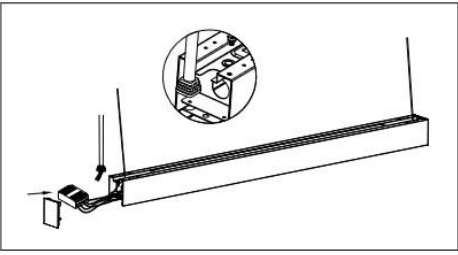
2. Attach the cable to the canopy.	
3. Connect the AC wires. Push all of the wires back into the junction box. Mount the cross bar on the junction box.	
4. Place the canopy on the ceiling.	
5. Remove one end-cap.	
6. Hang luminaire. Screw both bottom parts of the cables clockwise and secure them on the top of the housing, making sure the fixture is securely hung.	
7. Connect the power cord to the connector, referring to the wiring diagram below, and attach the power cord and reattach the end-cap. Caution: Isolate the two dimming wires (pink and purple) by P2 terminal individually if not dimming. You MUST connect wires so black goes to black, white goes to white, and ground goes to ground.	



COLOR SELECTABLE ARCHITECTURAL LED LINEAR FIXTURE


WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

8. The installation is complete.

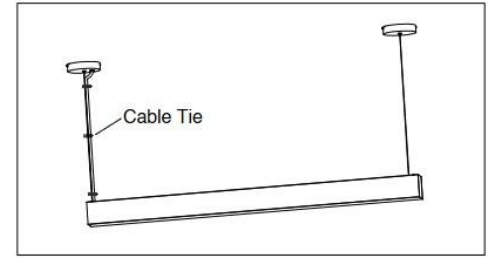


Continuous Row Mounting to Drywall Ceiling


1. Remove the diffusers using a suction cup, then remove the plastic end-cap, and pull out the connector.

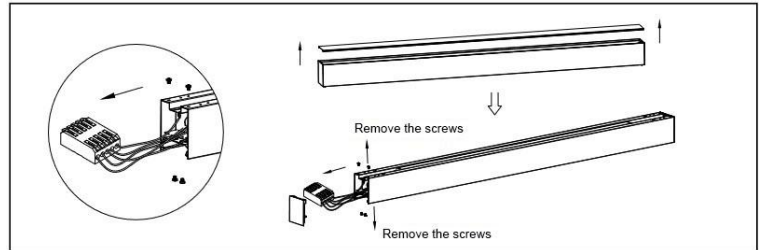

2. Connect the two connectors by wires. Pass the wires through the "I" joiner.

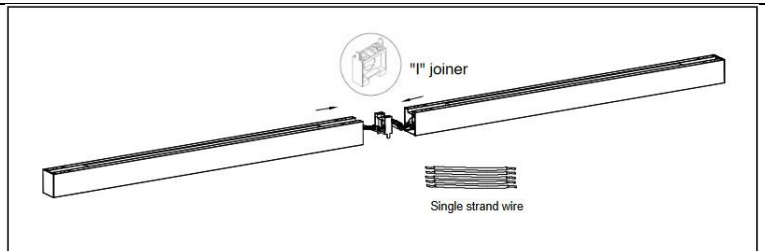


3. Join both fixtures so that the "I" joiner will be embedded into the fixture bodies. Screw the "I" joiner in place.

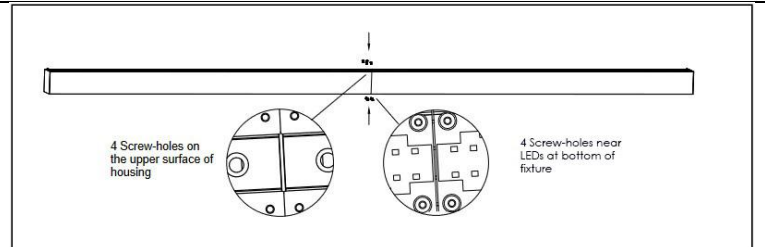


4. Remove the end-cover to make the wiring connection, and re-attach the end-cap after connecting the power cord to the housing.

CAUTION: You MUST connect wires so black goes to black, white goes to white, and ground goes to ground.

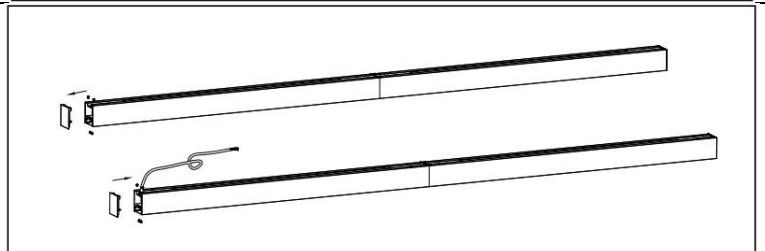

5. Install the diffuser.

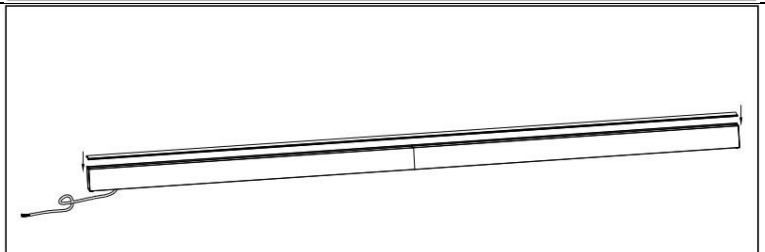





COLOR SELECTABLE ARCHITECTURAL LED LINEAR FIXTURE

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

6. Hang the luminaire.

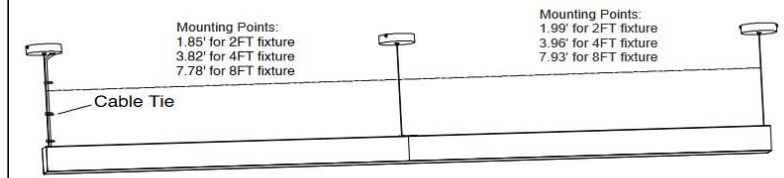

Wiring Diagrams

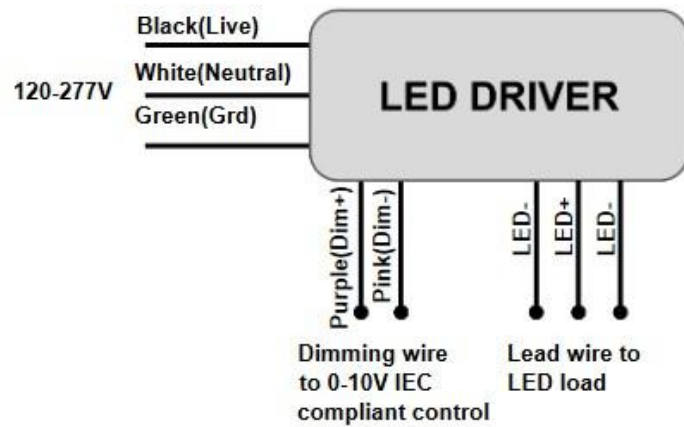


Field-Adjustable CCT

The slider switch is located on top of the fixture housing.

Adjust the color temperature by moving the switch to the left, center, or right position.

- Each switch position corresponds to a specific color temperature, as indicated on the product label.
- Default: 5000K

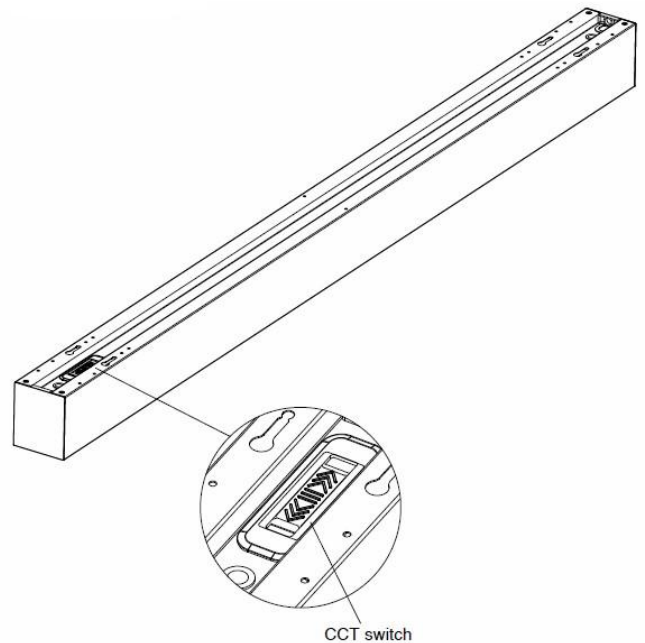



COLOR SELECTABLE ARCHITECTURAL LED LINEAR FIXTURE

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

⚠ WARNING

- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards, read all warnings and instructions included with and on the fixture box and all fixture labels.
- Proper grounding is required to ensure safety.
- Power must be turned off at the breaker before installation or maintenance.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Wear gloves and eye protection at all times while installing, servicing, or performing maintenance on the luminaire, and avoid direct eye exposure to the light source while it is on.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not install damaged product. Inspect luminaire for damage that may have occurred during transit. If damaged, contact the manufacturer immediately.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purposes, contact the manufacturer.

⚠ ADVERTENCIA

- Antes de instalar, reparar o realizar el mantenimiento de rutina de este equipo, siga estas precauciones generales.
- Para reducir el riesgo de muerte, lesiones personales o daños a la propiedad por fuego, descarga eléctrica, caída de piezas, cortes / abrasiones y otros peligros, lea todas las advertencias y instrucciones incluidas con y en la caja del dispositivo y todas las etiquetas del dispositivo.
- Se requiere una conexión a tierra adecuada para garantizar la seguridad.
- Se debe apagar la energía en el disyuntor antes de la instalación o el mantenimiento.
- Este producto debe ser instalado de acuerdo con el código de instalación aplicable por una persona familiarizada con la construcción y operación del producto y los peligros involucrados.
- Utilice guantes y protección para los ojos en todo momento durante la instalación, el servicio o el mantenimiento de la luminaria, y evite la exposición directa de los ojos a la fuente de luz mientras está encendida.
- Para evitar daños o abrasiones en el cableado, no exponga el cableado a bordes de láminas de metal u otros objetos afilados.
- No instale un producto dañado. Inspeccione la luminaria en busca de daños que puedan haber ocurrido durante el tránsito. Si está dañado, comuníquese con el fabricante de inmediato.
- Estas instrucciones no pretenden cubrir todos los detalles o variaciones en el equipo ni proporcionar todas las posibles contingencias a cumplir en relación con la instalación, operación o mantenimiento. Si desea obtener más información o si surgen problemas particulares que no están suficientemente cubiertos para los propósitos del comprador o propietario, comuníquese con el fabricante.