



WARNING

- Installation, service, and maintenance of luminaires should be performed by a qualified licensed electrician.
- Read all installation instructions before attempting installation. Keep these instructions for future use.

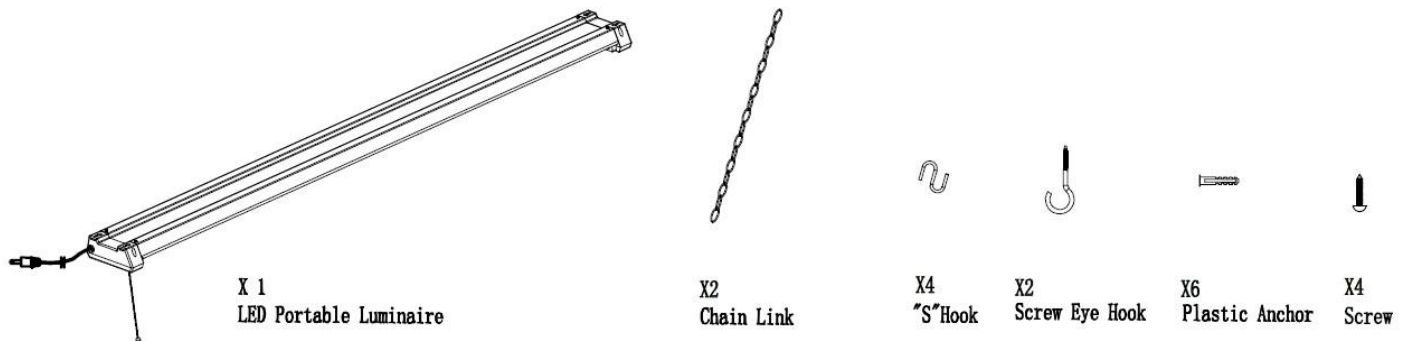
CAUTION

- Do not alter the plug or power supply cord in any way or try to install this product using any methods other than those shown in the following instructions.
- Personal injury and damage to the fixture and/or mounting surface may occur if the lamp is pulled from the surface. To reduce the likelihood of this, mount only on a mechanically sound surface.
- Not for use with dimmers.
- Install directly beneath a ceiling-mounted receptacle.
- Use only insulated staples or plastic ties to secure the cord. The power cord is 4.9 feet long.
- Not intended for recessed installation or in ceiling.
- Do not install directly over a heat source (stove, etc.).
- Do not install on a radiant-heating ceiling.

NOTICE

- Suitable for dry locations.
- Recommended mounting height is 8.2'.

Package Contents









Installation Instructions

Pre-Installation

- Turn off the switch and circuit breaker before installing this LED lamp.
- To install onto a plaster board surface, plaster board requires a minimum thickness of 3/8".



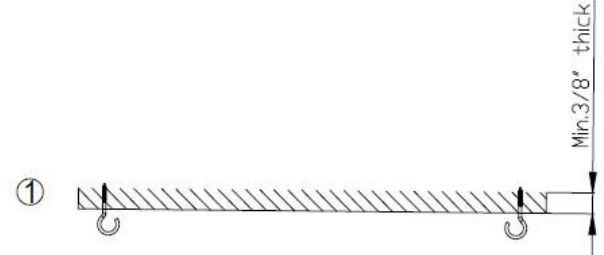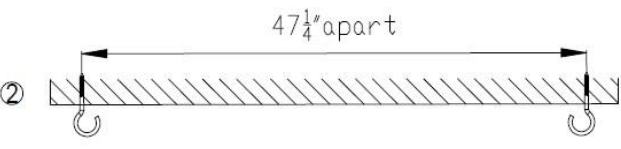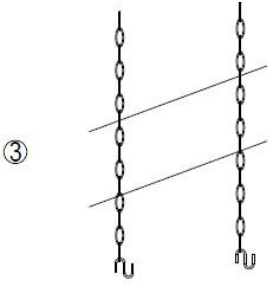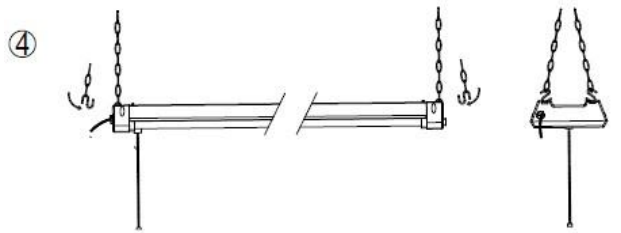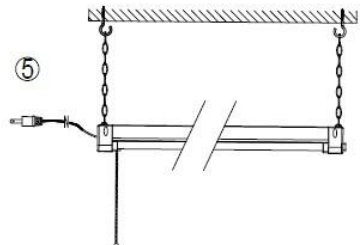Suspension Installation


<p>1. Mounting surface must be capable of supporting the fixture. For plaster board surfaces, it is recommended to use a minimum of #8 screw eye hooks with plastic anchors (included) or expansion bolts (not included). When installing onto plaster board, a minimum thickness of 3/8" is recommended.</p>	
<p>2. Install the 2 plastic anchors 47 1/4" apart, then screw an eye hook into each anchor.</p>	
<p>3. Install one "S" hook into each end of the chain, then crimp the "S" hook end attached to chain with pliers, leaving one side open. Repeat this step for the second chain provided.</p>	
<p>4. Install the "S" hook from one end of the chain into the end cap of the LED fixture, then crimp the hook ends with pliers. Repeat the same step for the opposite side.</p>	
<p>5. Install the LED fixture with chains, one end at a time into each screw eye hook. Once installed, crimp the screw eye hook with pliers, if needed. Please note that the on/off pull chain is 9.8 inches long.</p> <p>Note: Depending on installation height, a pull chain extension (not provided) may be required.</p>	
<p>6. Plug the power supply cord into the electrical output. Installation is complete.</p>	



Surface Mount Installation

<p>1. Mounting surface must be capable of supporting the fixture. If the surface is made of plaster board, we recommend that you use a minimum #8 screw eye hooks with plastic anchors (included) or expansion bolts (not included). If installing onto a plaster board surface, we recommend it have a minimum thickness of 3/8".</p>	
<p>2. Install the 4 plastic anchors 46 1/2" apart and 3.189" apart, then screw into each anchor. Spacing between the ceiling and a cap nut should be at least 1/3".</p>	
<p>3. Lift fixture up to screws and slide to one side to secure into place. Screw size: ST2X30.</p>	
<p>4. Plug the power supply cord into the electrical outlet. Installation is complete.</p>	

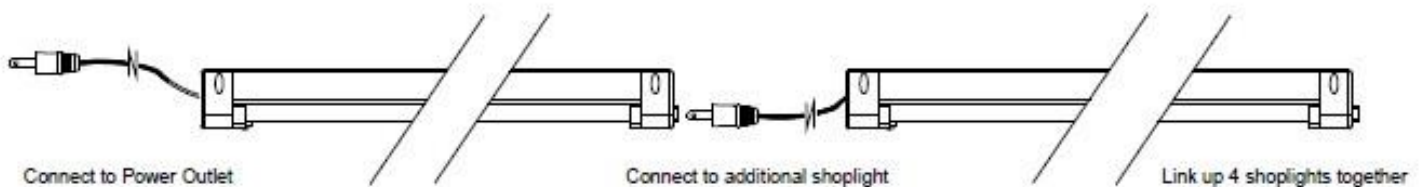Linking Multiple Shop Lights



FCC Warning

- This fixture complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

**⚠ WARNING**

- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards, read all warnings and instructions included with and on the fixture box and all fixture labels.
- Proper grounding is required to ensure safety.
- Power must be turned off at the breaker before installation or maintenance.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Wear gloves and eye protection at all times while installing, servicing, or performing maintenance on the luminaire, and avoid direct eye exposure to the light source while it is on.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not install damaged product. Inspect luminaire for damage that may have occurred during transit. If damaged, contact the manufacturer immediately.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purposes, contact the manufacturer.

⚠ ADVERTENCIA

- Antes de instalar, reparar o realizar el mantenimiento de rutina de este equipo, siga estas precauciones generales.
- Para reducir el riesgo de muerte, lesiones personales o daños a la propiedad por fuego, descarga eléctrica, caída de piezas, cortes / abrasiones y otros peligros, lea todas las advertencias y instrucciones incluidas con y en la caja del dispositivo y todas las etiquetas del dispositivo.
- Se requiere una conexión a tierra adecuada para garantizar la seguridad.
- Se debe apagar la energía en el disyuntor antes de la instalación o el mantenimiento.
- Este producto debe ser instalado de acuerdo con el código de instalación aplicable por una persona familiarizada con la construcción y operación del producto y los peligros involucrados.
- Utilice guantes y protección para los ojos en todo momento durante la instalación, el servicio o el mantenimiento de la luminaria, y evite la exposición directa de los ojos a la fuente de luz mientras está encendida.
- Para evitar daños o abrasiones en el cableado, no exponga el cableado a bordes de láminas de metal u otros objetos afilados.
- No instale un producto dañado. Inspeccione la luminaria en busca de daños que puedan haber ocurrido durante el tránsito. Si está dañado, comuníquese con el fabricante de inmediato.
- Estas instrucciones no pretenden cubrir todos los detalles o variaciones en el equipo ni proporcionar todas las posibles contingencias a cumplir en relación con la instalación, operación o mantenimiento. Si desea obtener más información o si surgen problemas particulares que no están suficientemente cubiertos para los propósitos del comprador o propietario, comuníquese con el fabricante.