

Project Name:	Type:
Part Number:	Date:

MULTIFIT FLAT ROUND

SPECIFICATION FEATURES

- **Mechanical** - Compact fixture body made from die cast aluminum for maximizing passive cooling ensuring long life lasting LED, non yellowing frosted polycarbonate lens for optimal light diffusion. Proprietary IC-rated potted driver for optimal heat protection, with hot-dip galvanized steel box and easy tool-less opening attached clipping lid. Rugged spring clips allow for both easy direct installation from 3/8" to 1" ceiling thickness and field accessibility below the ceiling for service or replacement. Additional mounting plates also available if required. Plenum rated cable and connector to connect from downlight to remote driver box.
- **Electrical** - The driver features DualDim technology, for maximum adaptability in any spaces whether it's commercial, residential or mixed. Rated for 120V to 277V, 50/60 Hz the driver is both 0-10V dimmable to 5% with low-end cut off and Forward and Reverse phase dimmable at 120V down to 10%. Please consult dimmer compatibility for additional information. Drivers also feature easy accessible outside switch for selecting the right color temperature. Coming with four 7/8" knockout, and suitable for pulling wires to accommodate up to (6) 12 gauge 90°C insulated conductors, making the MULTIFIT downlights fast and easy to wire in daisy-chain applications and contractor friendly. Sound rating <22db.
- **Optical** - Featuring SelectKelvin technology with field selectable CCTs 2700/3000/3500/4000/5000K. LED binning within 4 SDCM maximum. Offered in minimum 90 CRI. 110° optical beam angle. Edge-lite technology for minimizing glare.
- **Thermal** - Die cast heat sink maximizes passive thermal management and achieves a L70 calculated lifetime of 100,000 hours. Ambient temperature rated from -5°F to 113°F (-15°C to 45°C).
- **Compliance and Warranty** - ETL Listed for wet location. Certified air-tight per ASTM 283-04. Complies with FCC 47CFR Part 15B consumer limits for EMI/RFI emissions. Suitable for use in clothes closets when installed in accordance with the NEC 410.16 spacing requirements. Certified IC for direct contact with insulation. 5 Year Warranty for complete fixture. Optional 10 Year Extended Warranty available, subject to same terms, conditions and installation requirements as standard 5 Year Warranty.



DIGITAL NAVIGATION

Explore the spec sheet through the links below

ORDERING GUIDE	TECHNICAL INFORMATION
NOMINAL PERFORMANCE	LINE DRAWINGS
ACCESSORY ORDERING INFORMATION	PHOTOMETRY
LOGISTIC INFORMATION	CERTIFICATION INFORMATION

BENEFITS

- MULTIFIT provides the easiest retrofitting or new installation dimming compatibility with DualDim technology
- SelectKelvin technology to choose from five color temperatures ranging from 2700K to 5000K
- Install virtually anywhere with Wet Location, IC and Air-tight ratings
- Quick and easy installation with spring action clip even in the shallower plenums
- External driver with quick connector for easy wiring and daisy chain application

SUITABLE APPLICATIONS

- Retail
- Hospitality
- Residential
- Education
- Healthcare

MULTIFIT FLAT ROUND

ORDERING GUIDE

PART #			Example: MFR6/9CCT5S/DUALDIM/EXT		
Series	Size	CRI	CCT	Driver	Driver Style
MFR MULTIFIT Round Flat	4 4" 680lm	9 CRI 90+	CCT5S Selectable CCT 2700 / 3000 / 3500 / 4000 / 5000K	DUALDIM 0-10V dimming at 120-277V and Forward/Reverse phase dimming at 120V only	EXT External Driver box with quick connector
	6 6" 830lm				
	6HO 6" 1150lm				
	8 8" 1150lm				
	8HO 8" 1980lm				

FOOTNOTES: Factory setting at 3500K CCT

TECHNICAL INFORMATION

Type	Dimming	Input Voltage	Input Frequency	Input Current	Max. Input Power	THD Power	Power Factor	Flicker Index	Sound Rating
MFR4	0-10V and ELV/TRIAC	120-277V	50-60Hz	0.06 / 0.04A	8W	<20%	>0.9	<30%	<22db
MFR6				0.08 / 0.04A	10W				
MFR6HO				0.11 / 0.06A	14W				
MFR8				0.14 / 0.07A	18W				
MFR8HO				0.20 / 0.09A	24W				

NOMINAL PERFORMANCE

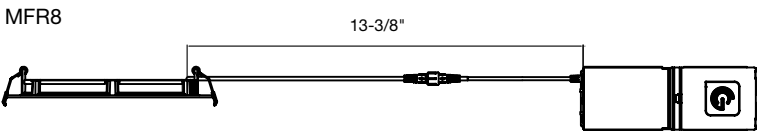
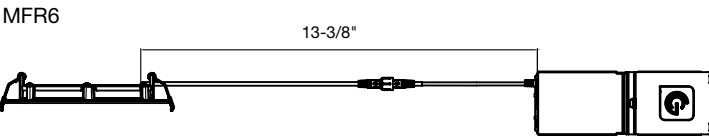
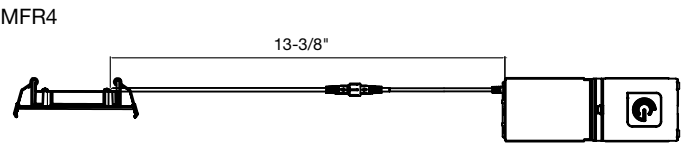
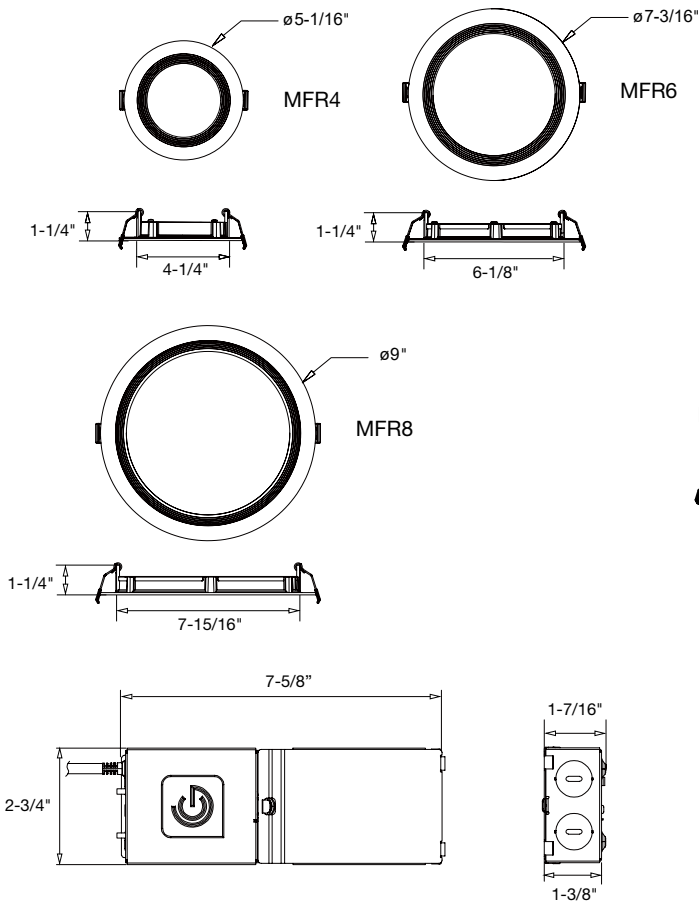
CCT	2700K			3000K			3500K			4000K			5000K		
Power/Lumen/Efficacy	Power	Lumens	Efficacy	Power	Lumens	Efficacy	Power	Lumens	Efficacy	Power	Lumens	Efficacy	Power	Lumens	Efficacy
MFR4	8.4W	620lm	74LPW	8.5W	643lm	76LPW	8.4W	663lm	79LPW	8.4W	667lm	80LPW	8.3W	656lm	79LPW
MFR6	9.3W	733lm	79LPW	8.5W	746lm	79LPW	9.4W	766lm	82LPW	9.4W	773lm	83LPW	9.25W	771lm	83LPW
MFR6HO	14.5W	1017lm	70LPW	14.7W	1050lm	71LPW	14.5W	1092lm	75LPW	14.5W	1107lm	76LPW	14.3W	1092lm	76LPW
MFR8	17.2W	1394lm	81LPW	17.4W	1441lm	83LPW	17.1W	1487lm	87LPW	17.1W	1506lm	88LPW	17.0W	1492lm	88LPW
MFR8HO	23.8W	1815lm	76LPW	24.1W	1884lm	78LPW	23.8W	1971lm	83LPW	23.7W	1998lm	84LPW	23.7W	1942lm	82LPW

Note: All rights reserved. All sizes and specifications are subject to change at any time without notice.

MULTIFIT FLAT ROUND











LINE DRAWINGS

MFR



Ceiling Cutout		
Type	Minimum	Maximum
MFR4	4-1/4"	4-5/8"
MFR6/6HO	6-1/8"	6-7/8"
MFR8/8HO	7-15/16"	8-9/16"




MULTIFIT FLAT ROUND

ACCESSORY ORDERING INFORMATION				
Product	Model	Description	Pictures	Dimensions
35121	NCFJB4	Round New Construction Frame w/ Jbox 4"		
35122	NCFJB6	Round New Construction Frame w/ Jbox 6"		
35123	NCFJB8	Round New Construction Frame w/ Jbox 8"		
98502	NOPLATE468	4" & 6" MULTIFIT EXT Series New Construction Plate for Stud/Joist Mounting		
98501	NOPLATE/T4689	New Construction or Remodel Plate for T-Grid Ceilings		
98569	GOOFRING4	4" Goof Ring - Outer Diameter 8-1/8"		
98568	GOOFRING6	6" Goof Ring - Outer Diameter 10-1/2"		
98567	GOOFRING8	8" Goof Ring - Outer Diameter 12-1/2"		
37934	8EMINVERTER	California Title 20 Compliant 8W Emergency LED Inverter (Field Installation)		

Note: All rights reserved. All sizes and specifications are subject to change at any time without notice.


MULTIFIT FLAT ROUND

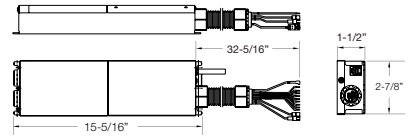ACCESSORY ORDERING INFORMATION


Product	Model	Description	Pictures	Dimensions
37935	21EMINVERTER	California Title 20 Compliant 21W Emergency LED Inverter (Field Installation)		
FHUPS1-UNV-25L-SD	FHUPS1-UNV-25L-SD	25W Emergency Micro Inverter for field installation to use with 0-10V Driver options.100-277VAC (up to 150W with use of 0-10V dimming). CEC Compliant		
37045	MFCON10	MULTIFIT Extension Cable Connector 10FT For all MULTIFIT Downlights Can connect max 2 cable together for a max length of 20FT		

PHOTOMETRY

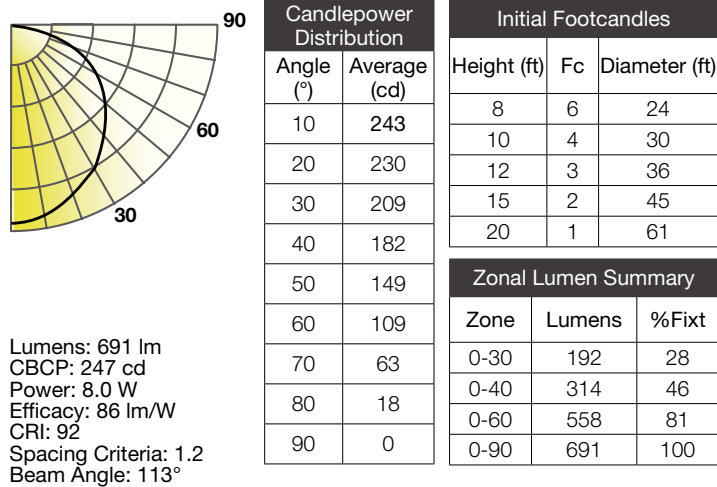MFR4/9CCT5S/DUALDIM/EXT (at 3500K)




MFR6/9CCT5S/DUALDIM/EXT (at 3500K)

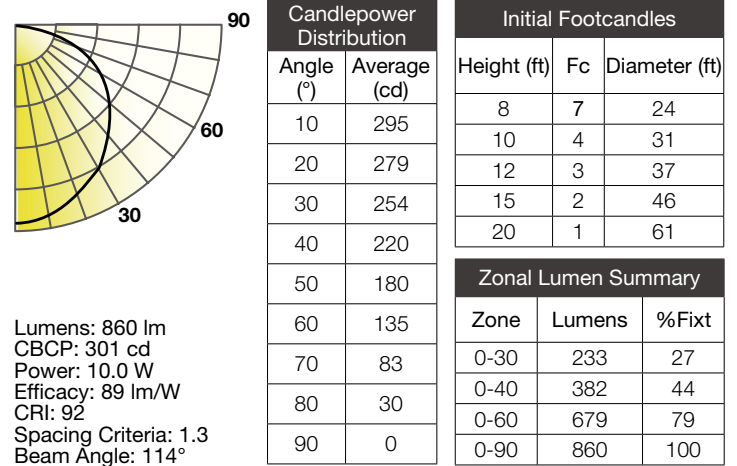


MULTIFIT FLAT ROUND

PHOTOMETRY

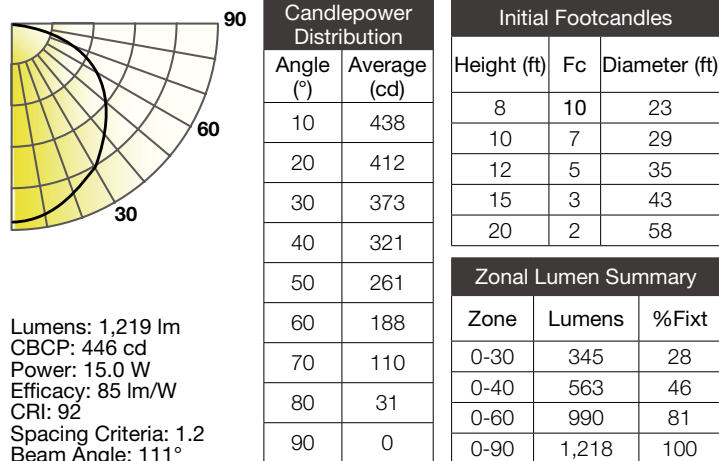
MFR6HO/9CCT5S/DUALDIM/EXT (at 3500K)



MFR8/9CCT5S/DUALDIM/EXT (at 3500K)

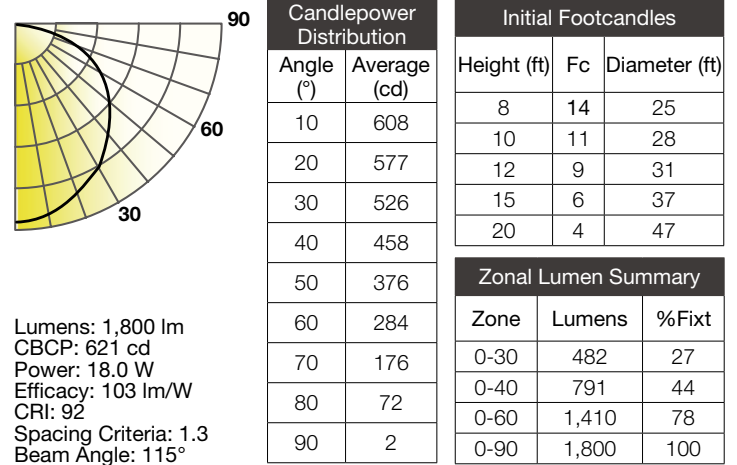

MFR8HO/9CCT5S/DUALDIM/EXT (at 3500K)

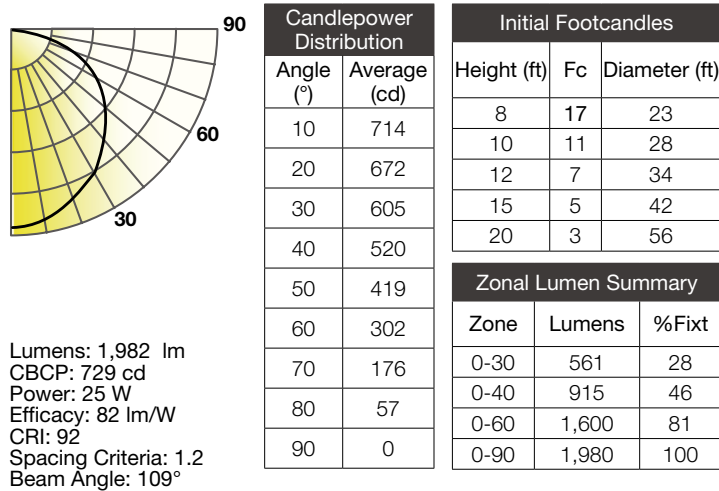

MULTIFIT FLAT ROUND

LOGISTIC INFORMATION				
Product	Model	Shipping Carton		
		Case Qty	Case Dimensions (LxWxH)	Case Weight
36998	MFR4/9CCT5S/DUALDIM/EXT	12PCS	19-19-5/8" x 11-5/8" x 11-5/8"	20.56 lb
36999	MFR6/9CCT5S/DUALDIM/EXT	12PCS	20-5/8" x 19-5/16" x 8-5/8"	26.06 lb
37000	MFR6HO/9CCT5S/DUALDIM/EXT	12PCS	20-1/2" x 19-7/16" x 8-5/8"	26.13 lb
37001	MFR8/9CCT5S/DUALDIM/EXT	12PCS	21-1/8" x 20-15/16" x 10-3/8"	34.43 lb
37002	MFR8HO/9CCT5S/DUALDIM/EX	12PCS	19-5/8" x 11-5/8" x 11-11/16"	20.56 lb

CERTIFICATION INFORMATION		
Product	Model	ES ID#
36998	MFR4/9CCT5S/DUALDIM/EXT	2403392
36999	MFR6/9CCT5S/DUALDIM/EXT	2403393
37000	MFR6HO/9CCT5S/DUALDIM/EXT	2403387
37001	MFR8/9CCT5S/DUALDIM/EXT	2403579
37002	MFR8HO/9CCT5S/DUALDIM/EXT	2403390

MULTIFIT FLAT ROUND

MODEL

MFR4/9CCT5S/DUALDIM/EXT
 MFR6/9CCT5S/DUALDIM/EXT
 MFR6HO/9CCT5S/DUALDIM/EXT
 MFR8/9CCT5S/DUALDIM/EXT
 MFR8HO/9CCT5S/DUALDIM/EXT



0-10V DIMMER COMPATIBILITY

Models: MFR4/9CCT5S/DUALDIM/EXT MFR6/9CCT5S/DUALDIM/EXT
 MFR6HO/9CCT5S/DUALDIM/EXT MFR8/9CCT5S/DUALDIM/EXT
 MFR8HO/9CCT5S/DUALDIM/EXT

Brand	Series	Model	Dimmability (120V & 277V Applicable)
Lutron	Nova	NTSTV-DV	Compatible
	Nova	NFTV	Compatible
	Diva	DVSTV	Compatible
	Diva	DVSCTV	Compatible
Leviton	Illumatech	IP710-LFZ	Compatible

120V DIMMER COMPATIBILITY

Models: MFR4/9CCT5S/DUALDIM/EXT MFR6/9CCT5S/DUALDIM/EXT

Brand	Series	Model	Dimmability (120V Applicable)
Lutron	Skylark	CTCL-153P	Compatible
	Diva	DVCL-153P	Compatible
	Maestro C.L	MACL-153M	Compatible
	Casé ta	PD-5NE	Compatible
	Skylark	CTELV-303P	Compatible
	Diva	DVELV-300P	Compatible
	Nova T	NTELV-600	Compatible
	Maestro	MAELV-600	Compatible
	Diva	DV-600P	Compatible
	Toggler	TG-600P	Compatible
Leviton	IllumaTech	IPE04-1LZ	Compatible
	SureSlide	6674	Compatible
	Trimatron	6602	Not Compatible
Cooper	Aspire	9536	Not Compatible

MULTIFIT FLAT ROUND

120V DIMMER COMPATIBILITY

Model: MFR6HO/9CCT5S/DUALDIM/EXT

Brand	Series	Model	Dimmability (120V Applicable)
Lutron	Skylark	CTCL-153P	Compatible
	Diva	DVCL-153P	Compatible
	Maestro C.L	MACL-153M	Compatible
	Casé ta	PD-5NE	Compatible
	Skylark	CTELV-303P	Compatible
	Diva	DVELV-300P	Compatible
	Nova T	NTELV-600	Not Compatible
	Maestro	MAELV-600	Compatible
	Diva	DV-600P	Compatible
	Toggler	TG-600P	Compatible*
Leviton	IllumaTech	IPE04-1LZ	Not Compatible
	SureSlide	6674	Compatible
	Trimatron	6602	Not Compatible
Cooper	Aspire	9536	Not Compatible

* Minimum 2 lamps

120V DIMMER COMPATIBILITY

Model: MFR8/9CCT5S/DUALDIM/EXT

Brand	Series	Model	Dimmability (120V Applicable)
Lutron	Skylark	CTCL-153P	Compatible
	Diva	DVCL-153P	Compatible
	Maestro C.L	MACL-153M	Compatible
	Casé ta	PD-5NE	Compatible
	Skylark	CTELV-303P	Compatible
	Diva	DVELV-300P	Compatible
	Nova T	NTELV-600	Compatible
	Maestro	MAELV-600	Compatible
	Diva	DV-600P	Compatible
	Toggler	TG-600P	Compatible
Leviton	IllumaTech	IPE04-1LZ	Compatible
	SureSlide	6674	Compatible
	Trimatron	6602	Not Compatible
Cooper	Aspire	9536	Compatible*

* Minimum 3 lamps

MULTIFIT FLAT ROUND

120V DIMMER COMPATIBILITY			
Model: MFR8HO/9CCT5S/DUALDIM/EXT			
Brand	Series	Model	Dimmability (120V Applicable)
Lutron	Skylark	CTCL-153P	Compatible
	Diva	DVCL-153P	Compatible
	Maestro C.L	MACL-153M	Compatible
	Casé ta	PD-5NE	Compatible
	Skylark	CTELV-303P	Compatible
	Diva	DVELV-300P	Compatible
	Nova T	NTELV-600	Compatible
	Maestro	MAELV-600	Compatible
	Diva	DV-600P	Compatible
	Toggler	TG-600P	Compatible
Leviton	IllumaTech	IPE04-1LZ	Compatible
	SureSlide	6674	Compatible
	Trimatron	6602	Compatible*
Cooper	Aspire	9536	Compatible**

* Maximum 2 lamps

** Munimum 2 lamps

GREEN CREATIVE has provided this dimmer switch compatibility chart for guidance when selecting a dimmer and lamp combination. Our Fixtures were tested for compatibility with the above listed dimmers. Dimmers that do not appear on the chart might still be compatible but have not been tested. All testing has been performed with a stable main supply. The quality of the local main, existing installation and wiring, as well as different manufacturer versions of the above dimmers may affect dimming performance. Since no assurance can be provided regarding these factors, it is a general recommendation to perform a test on-site prior to installing the LED Fixtures.