



60W
REPLACEMENT

90+ CRI	5,5W Watts
 E12	120V Voltage
 DAMP LOCATION	 Dimmable

High quality of light and color rendering (90+ CRI, 50+ R9),
with low flicker, flicker <30%,
Smooth dimming. Dimming lower than 10%.




ELECTRICAL SPECIFICATIONS

MODEL NO.	LUMEN	POWER	CCT	BEAM	CRI	PF	CBCP
SE-350.199	500LM	5.5W	2700K	360°	>90	>0.9	-

MECHANICAL SPECIFICATIONS

MODEL NO.	MEASURES	WEIGHT	OPERATIONAL TEMPERATURE	INNER BOX QTY	MASTER CARTON QTY
SE-350.199	1.38in X 3.82in	0.71oz	-20°C - 40°C	12pcs	48pcs



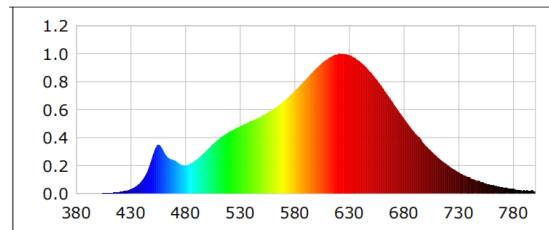


RA – CHART: >90

RA refers to the average value of R1 to R8.

R9 is the score that represents how accurately a light source will reproduce strong red colors. "Accurate" is defined as similarity to daylight or incandescent bulbs, depending on the color temperature.

R VALUES						
R1=94	R2=97	R3=99	R4=94	R5=94	R6=98	R7=91
R8=81	R9=60	R10=94	R11=96	R12=85	R13=95	R14=99

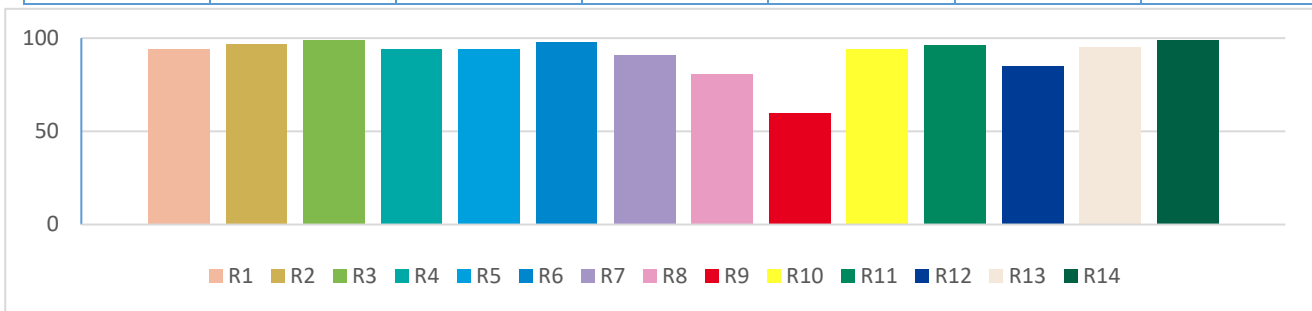

TM30 GRAPHIC

TM-30 deals with the color rendition of object.

Rf- a fidelity index that is similar to the commonly used CRI

Rg- a gamut index that provides information about saturation

Color vector graphic- a graphical representation of hue and saturation relative to a reference source.

90+ LIGHTING



MODEL	B11 5.5W 500LM 2700K E12
SKU	SE-350.199

DIMMER COMPATIBILITY LIST			
MANUFACTURER	BRAND	DIMMER MODEL	COMPATIBILITY
LUTRON	DIVA	DV-600P-WH	NC
		DVELV-300P-WH	OK
	-	MACL-153MR-WH	OK
	-	TG600P	OK
	-	T90B6	OK
	-	S600	OK
	MAESTRO	MRF2S-6CL-WH	NC
		MACL-153M-WH	OK
		MAELV-600-WH	OK
	Caseta	PD-6WCL-WH	NC
	DIVA C*L	DVWCL-153PH-WH	NC
	Skylark	S-603P-WH	NC
		SCL-153P-WH	NC
		SELV-300P-WH	OK
		SLV-600-WH	NC
	Spacer	SPSELV-600M	OK
	NOVA T	NTELV-300-WH	OK
		NTLV-600-277-WH	OK
	Radio RA2	RRD-6CL-WH	NC
	Ariadni	AYCL-153P-WH	NC
LEVITON	Decora	R62-6674-P0W	NC

DIMMER COMPATIBILITY

OK	Dims to < 15%
OK	Dims to 15 - 30%
NC	Not Compatible

90+ LIGHTING NOTES

- 1) This dimmer compatibility chart is provided by 90+ Lighting as a guidance for selecting a dimmer and lamp combination.
- 2) The results may be different for each application depending on the installation conditions.
- 3) 90+ Lighting recommends to perform a previous test before the installation to verify the dimmer compatibility.
- 4) We recommend using a 1/5 loading factor for incandescent dimmers when using with 90+ lamps.
For example: a 400W dimmer should be loaded with a number of lamps whose combined power do not exceed 80W.