



UFO LED HIGH BAY FIXTURE

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

WARNING

- Installation, service, and maintenance of luminaires should be performed by a qualified licensed electrician.
- Read the installation instructions carefully before installation.

CAUTION

- Do not use an electric generator to test this fixture.
- This luminaire must be installed in accordance to the National Electric Code and applicable local codes and ordinances.
- Use a strain relief bushing between the fixture and the outlet box when connecting power wires.
- In the event of smoke or fire, turn off the power immediately and call a licensed electrician.

Installation Instructions

Ring Mount

1. Screw the ring into the top of the fixture and tighten (Figure 1).
2. Hang the fixture on the ceiling hook or chain (Figure 2).
3. Connect the two ground wires together before connecting the two white neutral wires to each other and the two black wires to each other.




Figure 1




Figure 2

Surface Mount

1. Using the bracket (purchased separately) as a guide, mark the mounting holes on the surface using a marker, then drill guide holes for the mounting screws (Figure 3).
2. Install mounting screws (supplied by others) into the pre-drilled holes.
3. Align the bracket holes with the screw holes (Figure 4), and push the fixture to one side (Figure 5). Tighten the screws to secure the fixture.
4. Connect the two ground wires together before connecting the two white neutral wires to each other and the two black wires to each other. By adjusting the bracket screws, the fixture can be vertically adjusted 50° to the left or right (Figure 6).




Figure 3




Figure 4




Figure 5




Figure 6



UFO LED HIGH BAY FIXTURE

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

1/2" NPT Mount

1. Unscrew the nuts on 1/2" NPT (supplied by others) (Figure 7).
2. Insert 1/2" NPT stem into the hole in the bracket (sold separately)(Figure 8).
3. Re-screw the nuts (Figure 9).
4. Connect the two ground wires together before connecting the two white neutral wires to each other and the two black wires to each other. By adjusting the bracket screws, the fixture can be vertically adjusted 50° to the left or right (Figure 10).

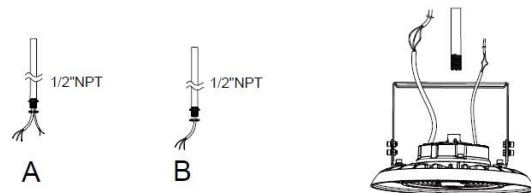


Figure 7





Figure 9

Figure 10

Wiring Diagram

This LED high bay can be dimmed using 0-10V dimming.

Connect the driver PURPLE wire (D+) to the DIMMER+ (PURPLE) wire and the driver PINK (D-) wire to the DIMMER- (PINK) wire using wire nuts (supplied by others).

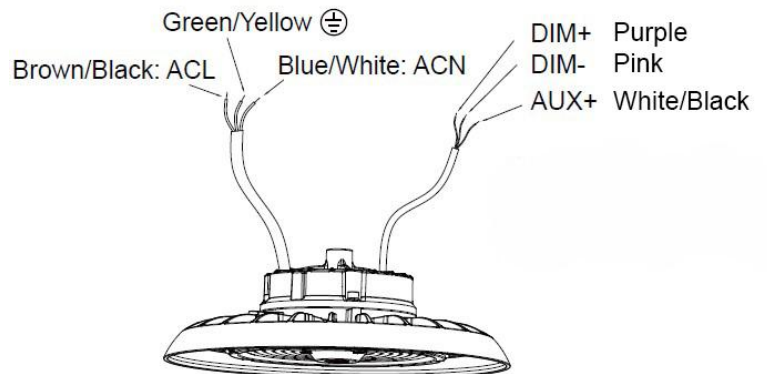

Compatible Dimmers

This product has 0-10V dimming. See list of recommended dimmers below:

Brand	Model
LUTRON	NTSTV-DV
LEVITON	DS710, IP710
LEGRAND	RH4FBL3PTC



⚠ WARNING

- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards, read all warnings and instructions included with and on the fixture box and all fixture labels.
- Proper grounding is required to ensure safety.
- Power must be turned off at the breaker before installation or maintenance.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Wear gloves and eye protection at all times while installing, servicing, or performing maintenance on the luminaire, and avoid direct eye exposure to the light source while it is on.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not install damaged product. Inspect luminaire for damage that may have occurred during transit. If damaged, contact the manufacturer immediately.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purposes, contact the manufacturer.

⚠ ADVERTENCIA

- Antes de instalar, reparar o realizar el mantenimiento de rutina de este equipo, siga estas precauciones generales.
- Para reducir el riesgo de muerte, lesiones personales o daños a la propiedad por fuego, descarga eléctrica, caída de piezas, cortes / abrasiones y otros peligros, lea todas las advertencias y instrucciones incluidas con y en la caja del dispositivo y todas las etiquetas del dispositivo.
- Se requiere una conexión a tierra adecuada para garantizar la seguridad.
- Se debe apagar la energía en el disyuntor antes de la instalación o el mantenimiento.
- Este producto debe ser instalado de acuerdo con el código de instalación aplicable por una persona familiarizada con la construcción y operación del producto y los peligros involucrados.
- Utilice guantes y protección para los ojos en todo momento durante la instalación, el servicio o el mantenimiento de la luminaria, y evite la exposición directa de los ojos a la fuente de luz mientras está encendida.
- Para evitar daños o abrasiones en el cableado, no exponga el cableado a bordes de láminas de metal u otros objetos afilados.
- No instale un producto dañado. Inspeccione la luminaria en busca de daños que puedan haber ocurrido durante el tránsito. Si está dañado, comuníquese con el fabricante de inmediato.
- Estas instrucciones no pretenden cubrir todos los detalles o variaciones en el equipo ni proporcionar todas las posibles contingencias a cumplir en relación con la instalación, operación o mantenimiento. Si desea obtener más información o si surgen problemas particulares que no están suficientemente cubiertos para los propósitos del comprador o propietario, comuníquese con el fabricante.