

WARNING

- Installation, service, and maintenance of luminaries should be performed by a qualified licensed electrician.
- Read all instructions.
- If installing as part of a new construction, keep the protective film on the fixture until all construction is complete.

CAUTION

- Install in accordance with national and local electrical code regulations.
- To reduce the risk of overheating and fire, make sure all connections are tight.
- Do not cover the fixture with heat insulation gasket or other similar materials.

NOTICE


- For dry and damp locations. Do not install in wet locations.

Installation Instructions

Drywall Ceiling

Parts List

1. Armored Cable & Connector (By Others)
2. AC Input (By Others)
3. J-Box (By Others)
4. Drywall Ceiling (By Others)
5. Junction Box Crossbar
6. Screw NO.8-32UNC, 4*22
7. Cable Holder
8. Wire Nut
9. AC Input of Driver
10. Driver Box
11. DC Input
12. Hex Nut
13. Nut

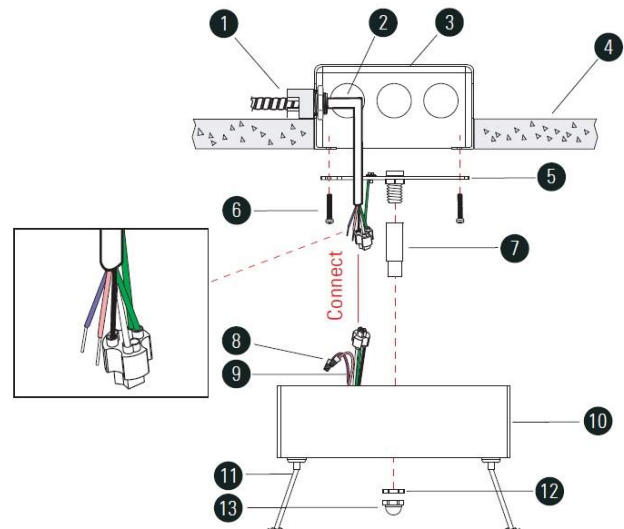


⚠ Connect DC wires correctly according to the label.




Junction Box Crossbar




Screw NO.8-32UNC, 4*22



Cable Holder



Wire Nut



Driver Box




Hex Nut



Nut


Wattage/CCT Adjustable

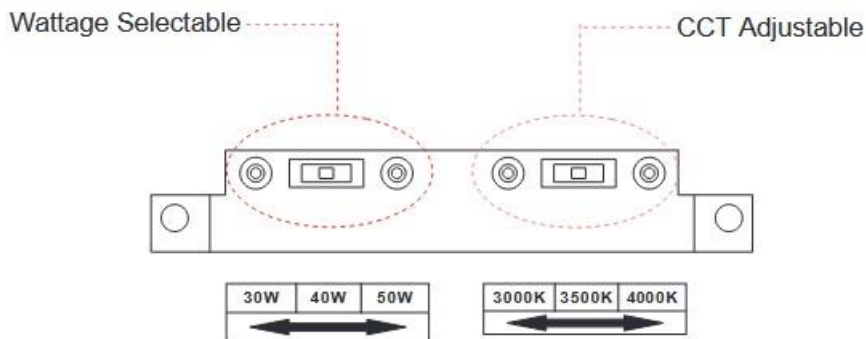

Switch is in the driver box


1. Install the J-box crossbar

- Secure the J-box Crossbar (5) on the J-box by screw (6).

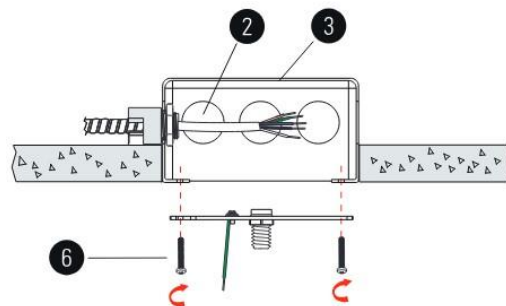


2. Install cable holder

- Screw the cable holder onto the J-box crossbar.

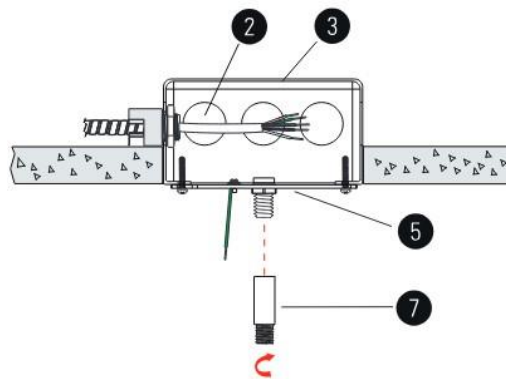


3. DC Wiring

- Pass the four DC input cables from the panel through the four connector holes at the bottom of the driver box to the inside of the driver box.
- Connect the DC output cables in the driver box to the four DC input cables from the panel using a wire nut (8) according to the labels on the DC cables and back of panel.

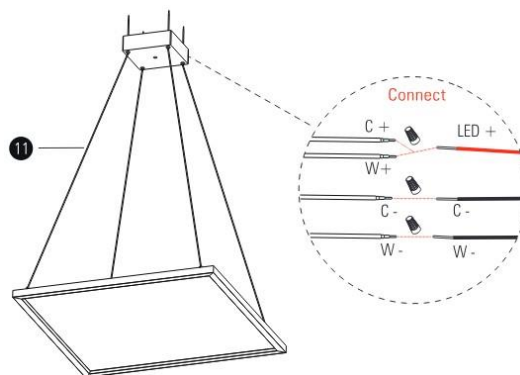


4. AC Wiring

- a. Insert the AC input cable (2) and the green ground cable in the J-box crossbar into the female connector in the driver box according to the corresponding colors, so that the AC input cable is correctly connected to the AC input cable of the power supply.
- b. Connect the dimming wires with a wire nut.

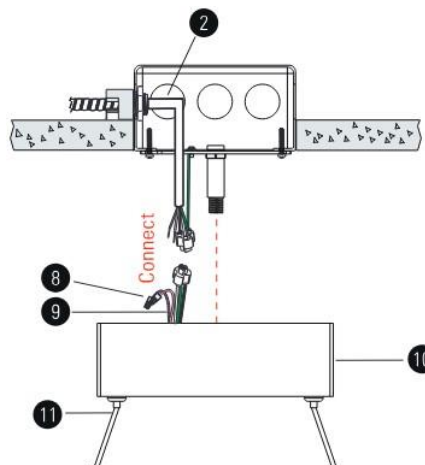


5. Secure the driver box


- a. Install the driver box on the ceiling, insert the cable holder (7) on the J-box crossbar through the middle hole of the driver box, then screw on (12) hex nut and (13) cap nut in turn to secure the driver box to the surface.

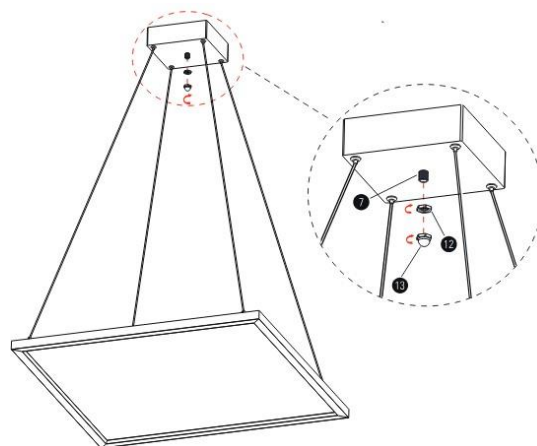

6. Complete

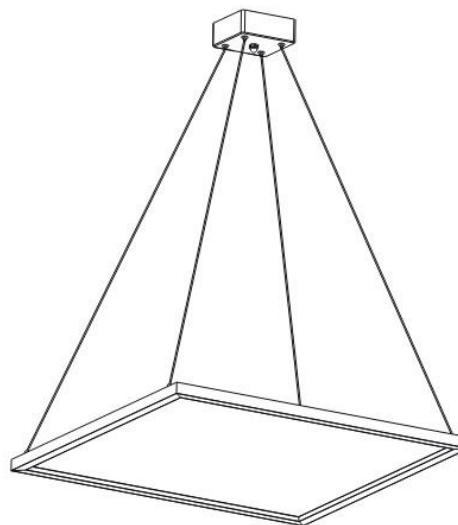

Wiring Diagram

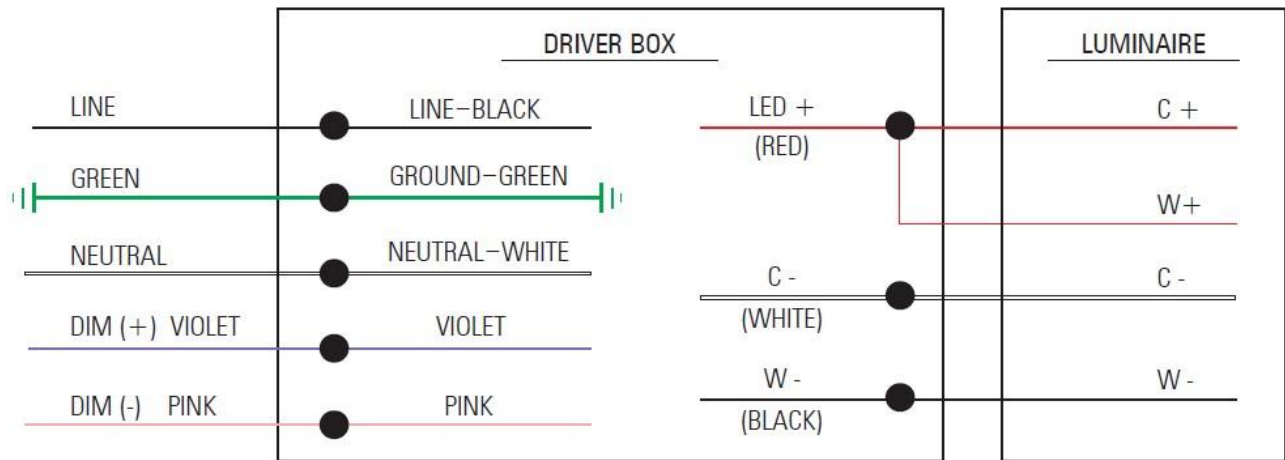

⚠ WARNING

- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards, read all warnings and instructions included with and on the fixture box and all fixture labels.
- Proper grounding is required to ensure safety.
- Power must be turned off at the breaker before installation or maintenance.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Wear gloves and eye protection at all times while installing, servicing, or performing maintenance on the luminaire, and avoid direct eye exposure to the light source while it is on.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not install damaged product. Inspect luminaire for damage that may have occurred during transit. If damaged, contact the manufacturer immediately.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purposes, contact the manufacturer.

⚠ ADVERTENCIA

- Antes de instalar, reparar o realizar el mantenimiento de rutina de este equipo, siga estas precauciones generales.
- Para reducir el riesgo de muerte, lesiones personales o daños a la propiedad por fuego, descarga eléctrica, caída de piezas, cortes / abrasiones y otros peligros, lea todas las advertencias y instrucciones incluidas con y en la caja del dispositivo y todas las etiquetas del dispositivo.

- Se requiere una conexión a tierra adecuada para garantizar la seguridad.
- Se debe apagar la energía en el disyuntor antes de la instalación o el mantenimiento.
- Este producto debe ser instalado de acuerdo con el código de instalación aplicable por una persona familiarizada con la construcción y operación del producto y los peligros involucrados.
- Utilice guantes y protección para los ojos en todo momento durante la instalación, el servicio o el mantenimiento de la luminaria, y evite la exposición directa de los ojos a la fuente de luz mientras está encendida.
- Para evitar daños o abrasiones en el cableado, no exponga el cableado a bordes de láminas de metal u otros objetos afilados.
- No instale un producto dañado. Inspeccione la luminaria en busca de daños que puedan haber ocurrido durante el tránsito. Si está dañado, comuníquese con el fabricante de inmediato.
- Estas instrucciones no pretenden cubrir todos los detalles o variaciones en el equipo ni proporcionar todas las posibles contingencias a cumplir en relación con la instalación, operación o mantenimiento. Si desea obtener más información o si surgen problemas particulares que no están suficientemente cubiertos para los propósitos del comprador o propietario, comuníquese con el fabricante.