



WATTAGE/COLOR SELECTABLE ROTATABLE LED LINEAR HIGH BAY FIXTURE







WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

WARNING

- Installation, service, and maintenance of luminaires should be performed by a qualified licensed electrician.
- Turn off power before installation or maintenance.
- Check fixture for damage and ensure all accessories are present. If there is damage or missing parts, contact the manufacturer.


CAUTION

- The use of accessory equipment not recommended by the manufacturer may cause unsafe conditions.
- Do not use this equipment for anything other than its intended use.
- If wires smoke or spark, turn off power immediately and contact a licensed electrician.
- Use UL-listed strain relief bushing when connecting the supply cord to the outlet box.
- Do not use an electric generator to test the fixture.
- Do not mount near gas or electric heaters.
- Equipment should be mounted in locations and at heights where it will not be subjected to tampering by unauthorized personnel.
- MIN 90°C SUPPLY CONDUCTORS
- THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

Included Hardware	Hardware Sold Separately				
 Chain*2	 Hook*2	 Wire Nut*3	 PIR Sensor PLT-13121	 Motion Sensor PLT-12844	 Surface Mount Bracket PLT-13672

Installation Instructions

Suspension with Chains
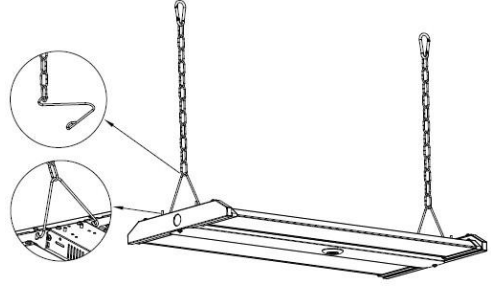
<ol style="list-style-type: none">1. Locate the two chains and two V-hooks (included). Attach each chain to a V-hook (Figure 1).2. Insert the V-hooks into the pair of holes located at each end on top of the fixture (Figure 1).3. Attach chains to an appropriate ceiling structure and adjust the chain length as needed (Figure 1).	 <p data-bbox="1234 1774 1331 1806">Figure 1</p>
--	---



WATTAGE/COLOR SELECTABLE ROTATABLE LED LINEAR HIGH BAY FIXTURE

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

4. Rotate the light panels to the desired angle (outward rotation up to 135°) (Figure 2).
5. Choose a suitable wiring knockout and connect the wires according to local standards and the National Electrical Code (NEC). Use only UL listed wiring. Refer to the Wiring Diagram section as needed.




Figure 2

Surface Mounting w/ Brackets (PLT-13672)

1. Mount the brackets (PLT-13672) on the rail or ceiling (Figure 3).
2. Attach the fixture to the brackets with screws (Figure 4).
3. Choose a suitable wiring knockout and connect the wires according to local standards and the National Electrical Code (NEC). Use only UL listed wiring. Refer to the Wiring Diagram section as needed.
4. Rotate the light panels to the desired angle (outward rotation up to 135°).

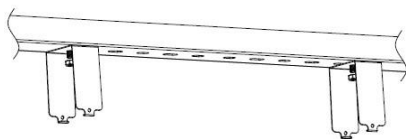


Figure 3

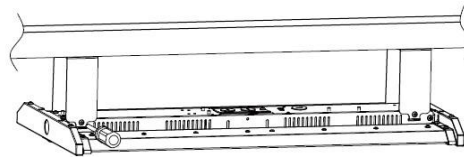


Figure 4

Optional Accessory Installation: DC Motion Sensor (PLT-12844) / DC PIR Sensor (PLT-13121)

1. Use a screwdriver to remove the 1/2" plug from the sensor port (Figure 5).
2. Twist-lock the DC sensor to the base. Use a remote control (PLT-12281) to adjust the sensor's settings (Figure 6).




Figure 5


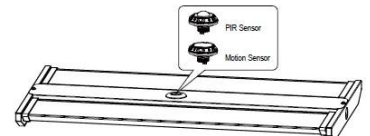


Figure 6

Wiring Diagram

L: Black
 N: White
 ⊕ : Green/Yellow
 DIM+: Purple
 DIM-: Pink

Note for Sensor Ready Fixtures: These fixtures cannot be connected to a dimming device when they are equipped with a motion or PIR sensor.

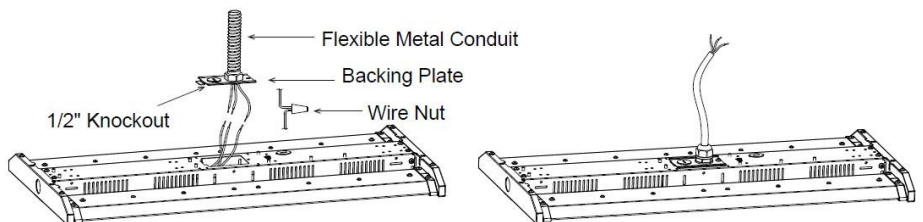



WATTAGE/COLOR SELECTABLE ROTATABLE LED LINEAR HIGH BAY FIXTURE


WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

CCT & Wattage Adjustment

The color temperature and wattage/lumen output can be adjusted via the two DIP switches located on the driver box (Figure 3).

- Make sure power to the fixture is off before selecting the desired color temperature and wattage.

See table below for wattage options and default settings.

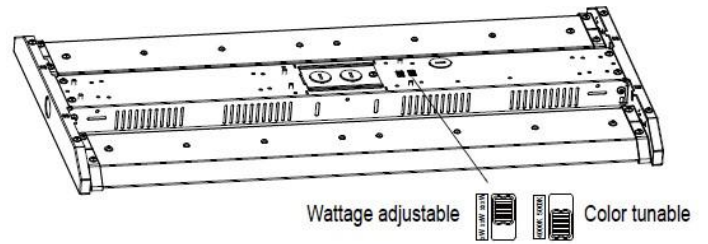

SKU	Wattage Selections	Color Temperature Selections	Default Settings
PLT-12728	130W, 150W, 165W	4000K, 5000K	165W, 5000K
PLT-12729	180W, 200W, 220W	4000K, 5000K	220W, 5000K
PLT-12730	255W, 275W, 300W	4000K, 5000K	300W, 5000K

Compatible Dimmers

This product features 0-10V dimming. The following dimmers are recommended:

- LUTRON NTSTV-DV
- LEVITON DS710-10Z / IP710
- LEGRAND RH4FBL3PW

Note for Sensor Ready Fixtures – when sensor is installed, it overrides the dimming circuit. DO NOT CONNECT to an external dimming device.

⚠ WARNING

- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards, read all warnings and instructions included with and on the fixture box and all fixture labels.
- Proper grounding is required to ensure safety.
- Power must be turned off at the breaker before installation or maintenance.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Wear gloves and eye protection at all times while installing, servicing, or performing maintenance on the luminaire, and avoid direct eye exposure to the light source while it is on.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not install damaged product. Inspect luminaire for damage that may have occurred during transit. If damaged, contact the manufacturer immediately.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or



WATTAGE/COLOR SELECTABLE ROTATABLE LED LINEAR HIGH BAY FIXTURE WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

should particular problems arise which are not covered sufficiently for the purchaser's or owner's purposes, contact the manufacturer.

⚠ ADVERTENCIA

- Antes de instalar, reparar o realizar el mantenimiento de rutina de este equipo, siga estas precauciones generales.
- Para reducir el riesgo de muerte, lesiones personales o daños a la propiedad por fuego, descarga eléctrica, caída de piezas, cortes / abrasiones y otros peligros, lea todas las advertencias y instrucciones incluidas con y en la caja del dispositivo y todas las etiquetas del dispositivo.
- Se requiere una conexión a tierra adecuada para garantizar la seguridad.
- Se debe apagar la energía en el disyuntor antes de la instalación o el mantenimiento.
- Este producto debe ser instalado de acuerdo con el código de instalación aplicable por una persona familiarizada con la construcción y operación del producto y los peligros involucrados.
- Utilice guantes y protección para los ojos en todo momento durante la instalación, el servicio o el mantenimiento de la luminaria, y evite la exposición directa de los ojos a la fuente de luz mientras está encendida.
- Para evitar daños o abrasiones en el cableado, no exponga el cableado a bordes de láminas de metal u otros objetos afilados.
- No instale un producto dañado. Inspeccione la luminaria en busca de daños que puedan haber ocurrido durante el tránsito. Si está dañado, comuníquese con el fabricante de inmediato.
- Estas instrucciones no pretenden cubrir todos los detalles o variaciones en el equipo ni proporcionar todas las posibles contingencias a cumplir en relación con la instalación, operación o mantenimiento. Si desea obtener más información o si surgen problemas particulares que no están suficientemente cubiertos para los propósitos del comprador o propietario, comuníquese con el fabricante.