



WARNING

- Installation, service, and maintenance of luminaires should be performed by a qualified licensed electrician.

CAUTION

- Do not alter or modify this product, as it may cause personal injury, death, property damage and/or product malfunction.
- Do not switch under load.
- Apply silicon sealer around the fixture where it meets the wall to prevent water entry.
- MIN 75°C SUPPLY CONDUCTORS.
- CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.

NOTICE

- This luminaire is designed to operate in ambient temperatures ranging from -40°C to 45°C.

Installation Instructions

Ensure the power supply to the installation site is turned off at the AC breaker panel before beginning installation.

1. Remove the two Allen-head screws as shown in Fig. 1 to detach the mounting bracket from the fixture.

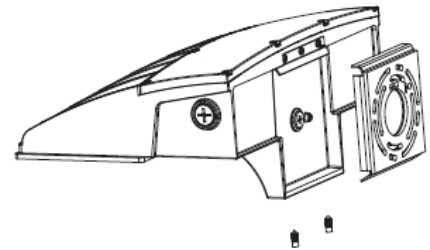


Fig 1

2. Attach the mounting bracket to the junction box with screws suitable for the application (Fig. 2).

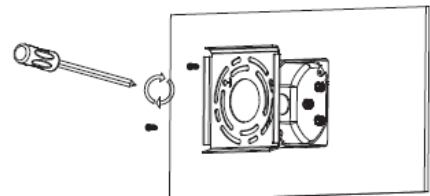


Fig 2



COLOR/WATTAGE/BEAM ANGLE SELECTABLE LED WALL PACK W/ PHOTOCELL

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

3. Secure the safety cable from the fixture to the mounted bracket (Fig. 3).

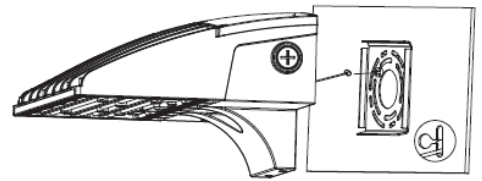


Fig 3

4. Connect the wires according to the wiring diagram in Fig. 4. Use only UL approved wire connectors.

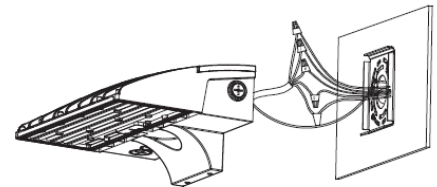
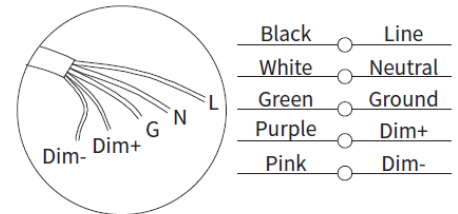


Fig 4

5. Align the fixture with the bracket and follow the arrow direction in Fig. 5 to insert it.

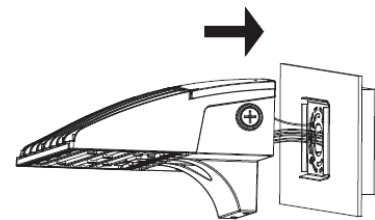


Fig 5

6. Insert and tighten the two Allen-head screws as shown in Fig. 6 until the fixture is securely fastened to the bracket. The installation is complete.


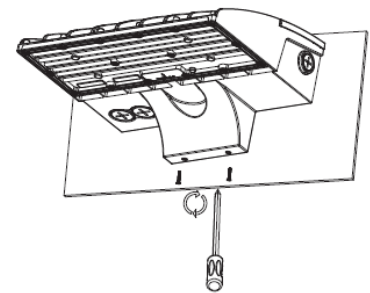


Fig 6



Wattage, CCT, Beam Angle, and Photocell Selection

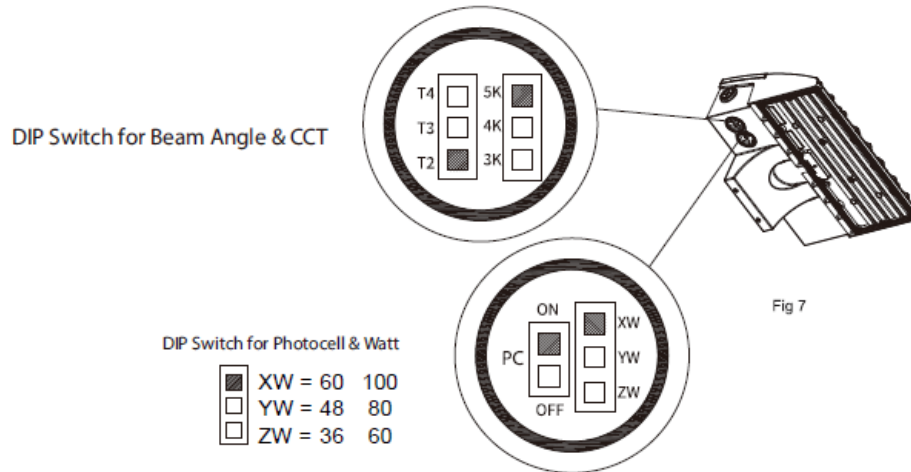

Making Setting Selections

1. Remove each 3/4" plug screw to reveal selectable switches (Fig 7).
2. Slide each switch to the desired setting.
3. Reinstall and tighten each plug screw.

Note: Ensure the power to the fixture is turned OFF before making any adjustments or changing switch settings.

Default Settings

- Watt: Highest Wattage
- CCT: 5000K
- Beam Angle: T2
- Photocell: ON

⚠ WARNING

- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards, read all warnings and instructions included with and on the fixture box and all fixture labels.
- Proper grounding is required to ensure safety.
- Power must be turned off at the breaker before installation or maintenance.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Wear gloves and eye protection at all times while installing, servicing, or performing maintenance on the luminaire, and avoid direct eye exposure to the light source while it is on.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.



COLOR/WATTAGE/BEAM ANGLE SELECTABLE LED WALL PACK W/ PHOTOCELL WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

- Do not install damaged product. Inspect luminaire for damage that may have occurred during transit. If damaged, contact the manufacturer immediately.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purposes, contact the manufacturer.

⚠ ADVERTENCIA

- Antes de instalar, reparar o realizar el mantenimiento de rutina de este equipo, siga estas precauciones generales.
- Para reducir el riesgo de muerte, lesiones personales o daños a la propiedad por fuego, descarga eléctrica, caída de piezas, cortes / abrasiones y otros peligros, lea todas las advertencias y instrucciones incluidas con y en la caja del dispositivo y todas las etiquetas del dispositivo.
- Se requiere una conexión a tierra adecuada para garantizar la seguridad.
- Se debe apagar la energía en el disyuntor antes de la instalación o el mantenimiento.
- Este producto debe ser instalado de acuerdo con el código de instalación aplicable por una persona familiarizada con la construcción y operación del producto y los peligros involucrados.
- Utilice guantes y protección para los ojos en todo momento durante la instalación, el servicio o el mantenimiento de la luminaria, y evite la exposición directa de los ojos a la fuente de luz mientras está encendida.
- Para evitar daños o abrasiones en el cableado, no exponga el cableado a bordes de láminas de metal u otros objetos afilados.
- No instale un producto dañado. Inspeccione la luminaria en busca de daños que puedan haber ocurrido durante el tránsito. Si está dañado, comuníquese con el fabricante de inmediato.
- Estas instrucciones no pretenden cubrir todos los detalles o variaciones en el equipo ni proporcionar todas las posibles contingencias a cumplir en relación con la instalación, operación o mantenimiento. Si desea obtener más información o si surgen problemas particulares que no están suficientemente cubiertos para los propósitos del comprador o propietario, comuníquese con el fabricante.