

PRO





11W REPLACES



**26W
CFL**

60% Energy Savings

- ⌚ Easy to install - Plug & Play Direct
- ⌚ Ballast output power control technology
- ⌚ Exceptional efficacy 91 LPW
- ⌚ Lasts 4 times longer than CFL
- ⌚ Compatible with most electronic ballasts
- ⌚ Available in 2700K, 3000K, 3500K, 4000K & 5000K CCT



LM 79

LM 80

TM 21



PL PRODUCT FEATURES

Ballast Output Control Technology

The PL DIR lamp's ballast output power control technology allows for high performance even on lower powered ballasts, making it a suitable replacement for 13W, 18W, 26W, 32W and 42W CFL PL lamps.

Ballast Type	Lumens	Bare Lamp
13W	720	8W
18W	850	9.5W
26W	1000	11W

Adjustable Base



This PL H lamp features a base that can be rotated 170° to fit any socket configuration. After installation simply rotate the lamp to achieve maximum light output.

APPLICATIONS

Retail



Hospitality




Office



Ref.#:DS040-PLH-11W-DIR

- Base:** G24q & GX24q (4-pin CFL)
- Voltage:** Ballast compatible 120-277V
- Dimmable:** No
- PF:** 0.9
- Lifetime:** 40,000 hrs
- Weight:** 0.27lb / 123g

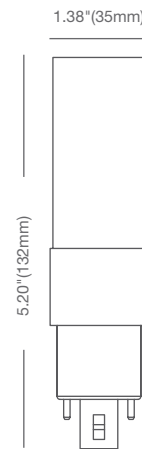

SPECIFICATIONS*

Model	Product	Power (W)	CCT	CRI (typ.)	Lumens	LPW	Beam Angle
11PLHG4/827/DIR	40817	11	Warm White 2700K	80	850	77	110°
11PLHG4/830/DIR	40818	11	Warm White 3000K	80	920	84	110°
11PLHG4/835/DIR	40819	11	Neutral White 3500K	80	950	86	110°
11PLHG4/840/DIR	40820	11	Natural White 4000K	80	1000	91	110°
11PLHG4/850/DIR	40821	11	Daylight 5000K	80	1000	91	110°

BALLAST PERFORMANCE

Ballast Type	Bare Lamp (W)	System (W)	2700K Lumens	3000K Lumens	3500K Lumens	4000K Lumens	5000K Lumens
13W	8	9.4	610	660	680	720	720
18W	9.5	11.3	720	780	805	850	850
26W	11	13.4	850	920	950	1000	1000
42W	11	13.8	850	920	950	1000	1000
UNV	11	12.9	850	920	950	1000	1000

Testing Method: Power and lumen output will vary based on number of lamps, ballast and fixture type. Above data is indicative only.

* Specification data is preliminary and may be subject to change

** Suitable for damp locations. Not for use where directly exposed to weather or water

*** Not intended for use in enclosed fixtures

**** Full installation guide and more details available on website