


4" IC Housing with Adjustable Lamp Holder



Features	Specifications
4" Airtight IC Housing Double wall construction. - For direct contact with ceiling insulation. - Integral thermal protector guards against improper lamping. - Adjustable socket bracket allows for different lamp types/sizes and proper and consistent lamp positioning. - Lamp: 50W MAX. E26 Base LED or Incandescent - cUL Listed for damp location and for feed through.	Wattage 50W
	Voltage 120V
	Lamp Type Medium Base (E26)
	Damp Location Listed

Technical Details

Construction: - IC rated for direct contact with insulation, for use in IC or non-IC conditions. - Housing adjusts in frame to accommodate up to 1 1/2" ceiling thickness. - Airtight housing with gasket to restrict airflow in accordance with ASTM E-283 air-tight requirements. - Aluminum housing for greater heat dissipation. Stamped galvanized steel frame.	
Installation: Designed for ceiling plenums where 2x6 joists or taller are used. High strength hanger bars can easily be nailed to joists. Maximum hole cutout is 4 1/4". Suitable for T-grid and drop ceiling applications. See installation sheet for detailed information.	
Junction Box: Positioned to accommodate straight conduit runs. Seven 1/2" trade size pryout conduit knockouts, 4 Romex pryouts with strain relief.	
Hanger Bars: Pre-installed hanger bars with True Nail facilitate easy installation in regular lumber, engineered lumber, and laminated beams. Integral T-bar slots for easy installation in T-grids. Spans up to 24" and can be repositioned 90°. Score lines allow for tool-free hanger bar size reduction. Integral leveling flange allows for single-person installation while aligning the housing with the joists.	
Electrical: - Input Voltage: 120V AC. - Thermally protected against improper lamping.	
Trims: Compatible with ELCO 4" Line Voltage PAR trims.	
Lamp: Designed for use with Medium Base (E26) PAR lamps up to 50W.	
Listings: - cUL Listed for Damp Location. - cUL Listed for Feed Through. - cUL Listed for Direct Contact with Insulation and Combustible Material. - Airtight per ASTM E-283. - Install a JA8-2016-E lamp/luminaire for Title 24 Compliance.	
Warranty: ELCO Lighting warrants products will be free from defects in materials and workmanship for a period of 3 years.	

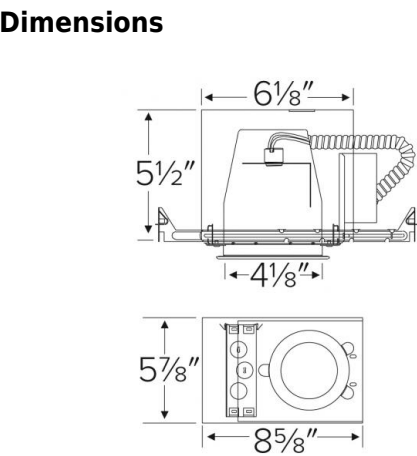

Product Numbers

Item	Lamp type	Watts	Voltage
EL99ICA	Medium Base (E26)	50W	120V