



**DESCRIPTION**

Add stylish, contemporary lighting with minimal effort with these wattage selectable LED cylinder pendant fixtures.

**FEATURES**

- Output will vary depending on the wattage selected; see Selectable Table for a full breakdown
- Comes with 8' power cable colored to match exterior finish; can be cut to length
- Comes with 4.5-inch flat canopy, compatible with recessed J-boxes
- Smooth baffle has white, copper, chrome, or black finish
- 0-10V dimming
- Wattage can be adjusted using the switch on the top of the fixture; see Installation Instructions for more information

**LISTINGS**

- UL rated for damp locations

**PERFORMANCE**

- CRI: 80
- CCT: 3500K
- LED L70 Life Hours: 50,000
- Beam Angle: 36°

**THERMAL**

- -4°F to 104°F (-20°C to 40°C) operating temperature

**ELECTRICAL**

- THD: <20%
- Power Factor: >0.9
- Input Voltage: 120-277V
- Surge Protection: 1kV
- Dimmable power supply (0-10V)

**INSTALLATION**

- Designed for suspension mounting to recessed J-boxes (hardware, canopy, & cord included); See installation instructions for more information on how to install these fixtures.

**CONSTRUCTION**

- Aluminum housing with white or black finish
- Smooth baffle with white, copper, chrome, or black finish
- PMMA lens protects LEDs while evenly distributing light

<b>Project name</b>	<b>Type</b>
<b>Catalog number</b>	
<b>Comments</b>	<b>Voltage</b>
<b>Approved by</b>	<b>Date</b>



**WARRANTY**

- 5-year limited warranty; see [pltsolutions.com](http://pltsolutions.com) for warranty details

**APPLICATIONS**

- Hotels
- Offices
- Kitchens
- Lobbies
- Conference Rooms

## PERFORMANCE SUMMARY

Item #	Watts*	CCT*	CRI	Dimming	Voltage	Baffle Finish	Finish	Size
PLT-90389	12/ 18/ 25	3500K	80	0-10V	120- 277V	White	White	4"
PLT-90390	12/ 18/ 25	3500K	80	0-10V	120- 277V	Copper	White	4"
PLT-90391	12/ 18/ 25	3500K	80	0-10V	120- 277V	Chrome	White	4"
PLT-90392	12/ 18/ 25	3500K	80	0-10V	120- 277V	Black	White	4"
PLT-90393	12/ 18/ 25	3500K	80	0-10V	120- 277V	White	Black	4"
PLT-90394	12/ 18/ 25	3500K	80	0-10V	120- 277V	Copper	Black	4"
PLT-90395	12/ 18/ 25	3500K	80	0-10V	120- 277V	Chrome	Black	4"
PLT-90396	12/ 18/ 25	3500K	80	0-10V	120- 277V	Black	Black	4"
PLT-90397	20/ 30/ 40	3500K	80	0-10V	120- 277V	White	White	6"
PLT-90398	20/ 30/ 40	3500K	80	0-10V	120- 277V	Copper	White	6"
PLT-90399	20/ 30/ 40	3500K	80	0-10V	120- 277V	Chrome	White	6"
PLT-90400	20/ 30/ 40	3500K	80	0-10V	120- 277V	Black	White	6"
PLT-90401	20/ 30/ 40	3500K	80	0-10V	120- 277V	White	Black	6"
PLT-90402	20/ 30/ 40	3500K	80	0-10V	120- 277V	Copper	Black	6"
PLT-90403	20/ 30/ 40	3500K	80	0-10V	120- 277V	Chrome	Black	6"
PLT-90404	20/ 30/ 40	3500K	80	0-10V	120- 277V	Black	Black	6"

\* See Selectable Table for full breakdown

# SELECTABLE TABLE

Item #	Watts (Nominal)	CCT	Lumens	LPW
PLT-90389	25.72	3500	2677.9	104.12
	18.72		2074.9	110.81
	12.99		1516.3	116.75
PLT-90390	25.6	3500	2594.4	101.34
	18.65		2010.9	107.8
	12.96		1471.7	113.55
PLT-90391	25.46	3500	2519.6	98.97
	18.59		1960.4	105.46
	12.9		1428.2	110.74
PLT-90392	25.37	3500	2469.9	97.34
	18.57		1924.5	103.65
	12.85		1399.7	108.94
PLT-90393	25.32	3500	2477.9	97.85
	18.39		1918.5	104.34
	12.81		1412	110.25
PLT-90394	25.21	3500	2411.6	95.65
	18.32		1862.6	101.66
	12.75		1364.8	107.04
PLT-90395	25.12	3500	2355.1	93.75
	18.27		1820.5	99.66
	12.69		1335.8	105.23
PLT-90396	25.04	3500	2302.8	91.97
	18.22		1788.1	98.14
	12.64		1310.1	103.61
PLT-90397	40.8	3500	4815.2	118.02
	30.66		3771.6	123.03
	20.85		2666.2	127.86
PLT-90398	40.67	3500	4695.4	115.44
	30.57		3676	120.26
	20.81		2597.3	124.8
PLT-90399	40.45	3500	4667.4	115.39
	30.53		3692	120.94
	20.79		2616.1	125.81
PLT-90400	40.41	3500	4538.5	112.32
	30.56		3599.4	117.79
	20.83		2551	122.45
PLT-90401	40.4	3500	4740.2	117.33
	30.3		3706.5	122.35
	20.6		2624.3	127.41
PLT-90402	40.3	3500	4623.3	114.71
	30.23		3632.5	120.15
	20.59		2570.4	124.83
PLT-90403	40.2	3500	4530.4	112.69
	30.24		3580	118.37
	20.6		2535	123.08
PLT-90404	40.16	3500	4478.7	111.53
	30.23		3531.4	116.81
	20.6		2499.8	121.34


## SELECTABLE TABLE

### **PLT-90389 TO PLT-90396**

Length: 4.9"

Outside Diameter: 3.9"

Inside Diameter: 2"

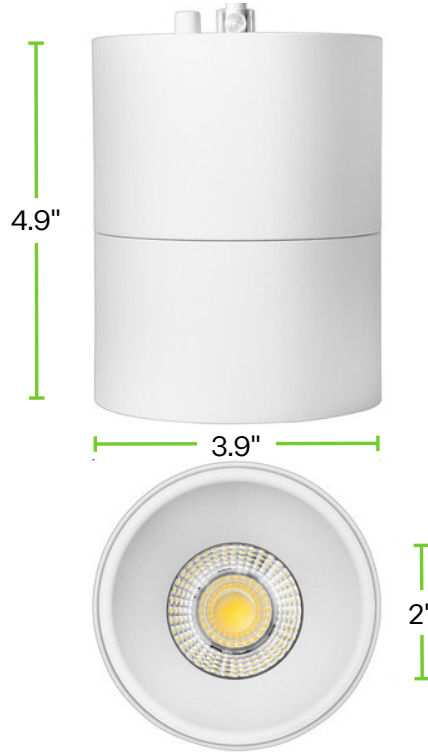

### **PLT-90389 TO PLT-90396**

Length: 5.9"

Outside Diameter: 5.8"

Inside Diameter: 3"

