



## FEATURES

- USA approved LM-80 SMD
- UL LM79 certified
- Input Voltage: 120-277 VAC 50/60Hz
- THD:<20%(at 277V)
- High lumen output, high efficiency, energy saving up to 60%
- Standard Warranty: 5 Years
- Standard Lifetime: Designed to L70 minimum 36,000 hours





**50% ENERGY EFFICIENCY & LONG LIFE**  
60% MORE ENERGY EFFICIENT THAN STANDARD HID LAMPS  
TYPICAL PAYBACK OF 1 - 3 YEARS

| SKU # | Kelvin | Lumens | Size | Wattage | Voltage | DLC? | Mounting | Life Hours | Warranty |
|-------|--------|--------|------|---------|---------|------|----------|------------|----------|
|-------|--------|--------|------|---------|---------|------|----------|------------|----------|

|           |      |      |     |    |         |    |         |       |         |
|-----------|------|------|-----|----|---------|----|---------|-------|---------|
| PLT-10533 | 5000 | 5000 | 2X2 | 48 | 120-277 | No | CEILING | 36000 | 5 years |
|-----------|------|------|-----|----|---------|----|---------|-------|---------|

## ADDITIONAL PHOTOS

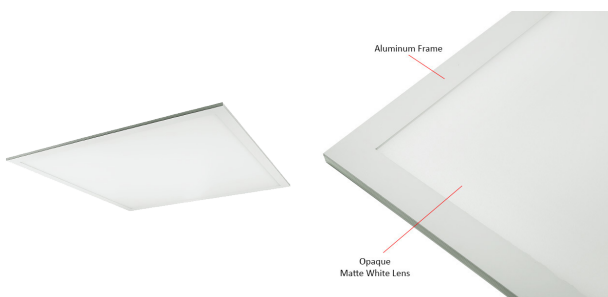

## FEATURES

- Opaque Lens
- Lightweight design
- LED driver included

## TYPICAL APPLICATIONS

- Hotels, Schools, Factories
- Office, Hospitals

## WARRANTY

Warranty

5 Years

## SPECIFICATIONS

Dimmable ..... Yes  
 DLC Listed ..... No  
 Safety Rating ..... UL  
 CRI ..... 80  
 Color ..... Stark White  
 Color Temperature ..... 5000 Kelvin  
 Life Hours ..... 36000  
 Wattage ..... 48 Watt  
 Lumens ..... 5000  
 Voltage ..... 120/208/240/277  
 Finish ..... White  
 Housing ..... N/A  
 Mounting ..... Ceiling Grid Mount/Suspended  
 Lens ..... Opaque  
 Length ..... 24 in.  
 Height ..... 3.8 in.  
 Width ..... 24 in.  
 Weight ..... 7.5 lbs.  
 Warranty ..... 5 Years

## PHOTOMETRICS

