

**LDL**  
Qualified  
Product  
Listed




## PL LAMPS | REWIRE

With a universal base that is compatible with 2-pin diagonal, Kobi Electric LED PL Rewire lamps are low maintenance and energy efficient alternatives for traditional PL tube compact fluorescent lamps. They are designed for 120-277V AC directly from mains, and have a dedicated internal driver, rendering the fluorescent ballast unnecessary. Unlike fluorescents, our PL lamps start instantly with no warm up time.

### SPECIFICATIONS

EQUIVALENT	13-26 Watt CFL
AVERAGE RATED LIFE	25,000 hrs
HOUSING	Plastic
BASE	Universal 2pin (Rewire)
POWER	120-277V, 60Hz
LENS	Frosted
BEAM	Omni
COLOR (K)	3500, 4000, 5000

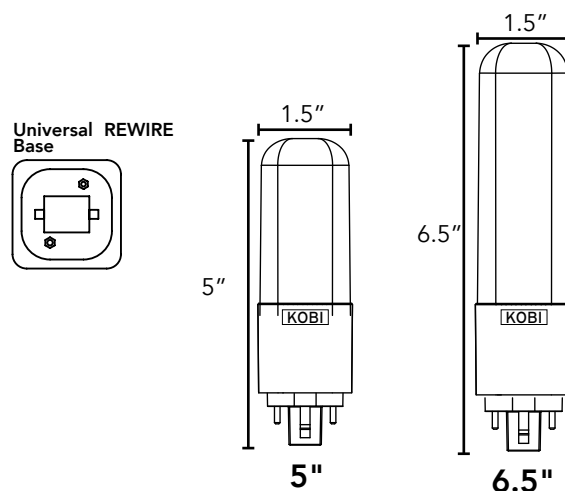

### BENEFITS

- Up to 47% more efficient than CFL equivalent
- Longer life and lower maintenance costs
- Mercury and Lead free, as well as UV and IR free
- Instant on to full brightness, no warm up
- No ballast needed

### APPLICATION INFORMATION

Applications	Market Segments
– Security Lighting	– Hospitality
– Downlighting	– Commercial
– Sconces	– Industrial
	– Multi-Family Housing

### Application Notes

1. Operating temperature range between -20°C and +45°C (-4°F and +113°F)
2. Not for use with emergency light fixtures or exit lights
3. Not for use in totally enclosed fixture
4. For use in dry locations only
5. Ballast bypass required, wiring direct to mains voltage for rewire models

This device complies with Part 15 of the FCC rules and has been tested and found to comply with the limits for a Class B digital device. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

### CERTIFICATIONS



LM79 reports are available upon request.



Based on 12 hours of use per day.

# PL REWIRE

## ORDERING INFORMATION


### REWIRE

Order Code	Part Number	Size (In)	Wattage (W)	Voltage (V)	Base	Equivalent (W)	CCT <sup>1</sup>	Typical Lumens <sup>2</sup>	CRI <sup>3</sup>	Dim	Weight (lbs)	Case Quantity
K3Q4	PL-1335-RMV-G24	5	7	120-277	G24	13W CFL	3500K	750	>80	NO	0.3	24
K3Q5	PL-1340-RMV-G24	5	7	120-277	G24	13W CFL	4000K	800	>80	NO	0.3	24
K3Q6	PL-1350-RMV-G24	5	7	120-277	G24	13W CFL	5000K	800	>80	NO	0.3	24
K3N8	LED-700-PL-G24-5.5-50-MV-NB	5	8	90-277	G24	13W CFL	5000K	700	>80	NO	0.3	24
K3Q7	PL-1835-RMV-G24	6.5	10	120-277	G24	18W CFL	3500K	1050	>80	NO	0.35	24
K3Q8	PL-1840-RMV-G24	6.5	10	120-277	G24	18W CFL	4000K	1050	>80	NO	0.35	24
K3Q9	PL-1850-RMV-G24	6.5	10	120-277	G24	18W CFL	5000K	1050	>80	NO	0.35	24
K9L9	LED-1000-PL-G24-5.5-27-MV-NB	5	11	90-277	G24	18W CFL	2700K	1000	>80	NO	0.35	24
K0L1	LED-1000-PL-G24-5.5-41-MV-NB	5	11	90-277	G24	18W CFL	4100K	1000	>80	NO	0.35	24
K3N9	LED-1000-PL-G24-5.5-50-MVNB	5	11	90-277	G24	18W CFL	5000K	1000	>80	NO	0.35	24
K4Q0	PL-2635-RMV-G24	6.5	13	120-277	G24	26W CFL	3500K	1400	>80	NO	0.35	24
K4Q1	PL-2640-RMV-G24	6.5	13	120-277	G24	26W CFL	4000K	1400	>80	NO	0.35	24
K4Q2	PL-2650-RMV-G24	6.5	13	120-277	G24	26W CFL	5000K	1400	>80	NO	0.35	24
K4N0	LED-1400-PL-G24-6.5-50-MV-NB	6.5	15	90-277	G24	26W CFL	5000K	1400	>80	NO	0.35	24

1. Thermally stable typical CCT ( $\pm 10\%$ ) 2. Thermally stable typical lumens ( $\pm 10\%$ ) 3. CRI - Color Rendering Index

### WIRING OVERVIEW

For 2-Pin rewire models only.

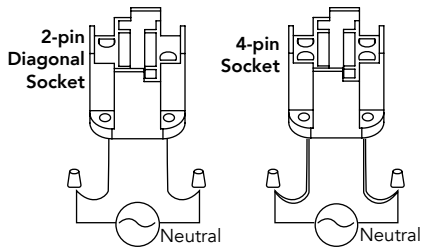

**!** If not qualified, do not attempt installation. Contact a qualified electrician.

### Accessory Sold Separately

Order Code	Part Number	Descriptions
K3R2	G24-PLC-S	Socket for PLC lamps, G24 Base