

HPS / 400 - 1000 watts

MH / 1500 watts

PS / 750 - 1000 watts

Limited Quantities Available

## Application

Great for illuminating sporting areas or any external environment requiring bright light




Bottom view with Factory Installed Option Extended Bolt (B) (5/8 - 11 thread x 1.5" length extending from casting)



Side View with Field Installed Yoke

## DIMENSIONS

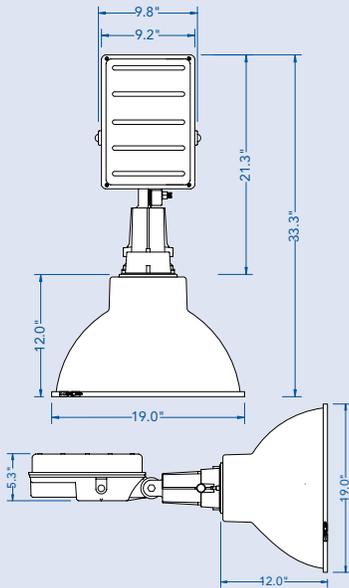


Note:  
Reflector dimensions shown  
Type 5 19" (FIO Option 9): 19" OD x 12" H

Other reflector dimensions:  
Type 3 (FIO Option 3): 23" OD x 12.5" H  
Type 4 (FIO Option 4): 21" OD x 14.5" H  
Type 5 (FIO Option 5): 21" OD x 14.5" H

## PHOTOMETRICS

1500W MH @ 30' Mounting Height  
and aimed 30° Below the Horizon  
Isofootcandles



## Features

- Die cast aluminum housing with bronze finish is suitable for yoke mount or cross arm mounting. Specify Factory Installed Option "B" for preinstalled cross arm bolt (also used for accessory SLPTM). Bolt is galvanized 5/8"-11 with exposed bolt length of 1.5".
- Suitable for Wet locations.
- Die cast aluminum socket housing with vertical aiming scale.
- Anodized aluminum reflectors for Type 3, 4, or 5 distribution.
- Optical chamber is sealed to inhibit contaminants.
- UL Listed porcelain mogul socket (1500W, 600V, 5kv pulse rated).
- Suitable for -30C MH / -40C HPS.
- Max weight (1500W) 49 lbs.
- EPA: 2.2 sq. ft. (Type 5-19") / 2.5 sq.ft. (Type 4 or 5) / 2.9 sq. ft. (Type 3)

## Accessories - Field Installed (sold separately) & Replacement Parts

Catalog #	Description
SLR-3	Replacement Type 3 23" Reflector
SLR-4	Replacement Type 4 21" Reflector
SLR-5	Replacement Type 5 21" Reflector
SLR-9	Replacement Type 5 19" Reflector
SLR-3-LENS	Replacement Type 3 Lens - Hinged Clamp Band - Gasket Assembly (Clip Closure)
SLR-4-LENS	Replacement Type 4 Lens - Hinged Clamp Band - Gasket Assembly (Clip Closure)
SLR-5-LENS	Replacement Type 5 Lens - Hinged Clamp Band - Gasket Assembly (Clip Closure)
SLR-9-LENS	Replacement Type 5 19" Lens - Hinged Clamp Band - Gasket Assembly (Screw Closure)
SLPTM	Textured bronze finished pole top mount that allows aiming of fixture (includes hardware)
SLILB	Internal lamp brace that fits inside reflector and provides support for lamp
SLYM	Steel yoke mount

• Specifications are subject to change without notice.

### ORDERING INFORMATION

Model Family	Wattage	Lamp Type	Lamp Option	Input Voltage	Ballast Winding	Factory Installed Options	Reserved for Factory Use
<b>SL</b>	<b>1500</b>	<b>M</b>	<b>0</b>	<b>M4</b>	<b>C</b>	<b>B5C6F0</b>	<b>00</b>
Sports Lighter	<b>0400:</b> 400 watts <b>0750:</b> 750 watts <b>1000:</b> 1000 watts <b>1500:</b> 1500 watts	<b>M:</b> Metal Halide (1500W Only) <b>P:</b> Pulse Start Metal Halide <b>S:</b> High Pressure Sodium	<b>0:</b> Lamp not included <b>1:</b> Clear bulb lamp included	<b>M4:</b> Multi-tap Ballast; 277v prewire <b>M3:</b> Multi-tap Ballast; 240v prewire <b>M1:</b> Multi-tap Ballast; 120v prewire <b>08:</b> 277v Single Tap Ballast <b>11:</b> 480V Single Tap Ballast <b>F5:</b> Multi-tap Ballast; 480v prewire	<b>A:</b> Aluminum winding ballast <b>C:</b> Copper winding ballast  See Ballast Availability Chart for options.	<b>B:</b> Incl. Extended Bolt for X-arm Mounting (also for SLPTM accessory use) <b>Y:</b> Yoke Mount Ready (no extended bolt) (order SLYM Accessory separately)  <b>0:</b> Powerhead only (no lens/reflector) <b>3:</b> NEMA 3 23" Reflector with Hinged Lens <b>4:</b> NEMA 4 21" Reflector with Hinged Lens <b>5:</b> NEMA 5 21" Reflector with Hinged Lens <b>9:</b> NEMA 5 19" Reflector with Lens (screw Closure)  <b>C0:</b> No prewired cord included <b>C3:</b> Incl. Prewired SEOW Cord; 16/3 x 3-ft <b>C6:</b> Incl. Prewired SEOW Cord; 16/3 x 6-ft <b>C#:</b> Special cord length  <b>F0:</b> No Fuseholder <b>F1:</b> Single Fuse (120/277v applications) <b>F2:</b> Double Fuse (208/240/240v applications)	

### Ballast Availability

Ballast/Voltage	1500	1000	750	400
<b>S#M1</b> HPS CWA Ballast - High PF - Multi-tap (wired 120v)		C		C
<b>S#M2</b> HPS CWA Ballast - High PF - Multi-tap (wired 208v)		C		C
<b>S#M3</b> HPS CWA Ballast - High PF - Multi-tap (wired 240v)		C		C
<b>S#M4</b> HPS CWA Ballast - High PF - Multi-tap (wired 277v)		C		C
<b>S#11</b> HPS CWA Ballast - High PF - 480V		C		
<b>S#F5</b> HPS CWA Ballast - High PF - Multi-tap (wired 480v)		C		C
<b>M#08</b> MH CWA Ballast - High PF - 277V	C			
<b>M#M1</b> MH CWA Ballast - High PF - Multi-tap (wired 120v)	A or C			
<b>M#M2</b> MH CWA Ballast - High PF - Multi-tap (wired 208v)	A or C			
<b>M#M3</b> MH CWA Ballast - High PF - Multi-tap (wired 240v)	A or C			
<b>M#M4</b> MH CWA Ballast - High PF - Multi-tap (wired 277v)	A or C			
<b>M#11</b> MH CWA Ballast - High PF - 480V	C			
<b>M#F5</b> MH CWA Ballast - High PF - Multi-tap (wired 480v)				
<b>P#M1</b> PSMH CWA Ballast - High PF - Multi-tap (wired 120v)		A	A	
<b>P#M2</b> PSMH CWA Ballast - High PF - Multi-tap (wired 208v)		A	A	
<b>P#M3</b> PSMH CWA Ballast - High PF - Multi-tap (wired 240v)		A	A	
<b>P#M4</b> PSMH CWA Ballast - High PF - Multi-tap (wired 277v)		A	A	
<b>P#11</b> PSMH CWA Ballast - High PF - 480V		A		
<b>P#F5</b> PSMH CWA Ballast - High PF - Multi-tap (wired 480v)		A		

### Sample Model Number:

**SL 1500M0 M4A B5C6F0 00**  
 Sports Lighter, 1500W Metal Halide  
 Lamp not included  
 W/ Factory installed mounting bolt  
 W/ Type 5 reflector, 16/3x6-ft cord, no fuseholder

### RAPID SHIP MODELS AVAILABLE FOR NEXT DAY SHIPMENT

- SL1500M1M4AY5C0F0
- SL1500M1M4AY9C0F0

A	Ballast includes aluminum windings.
C	Ballast includes all copper windings.
A or C	Available with either aluminum or all copper ballast.
	Not Available.

• Specifications are subject to change without notice.