

# Elements

by TCP



## LED Area Light

Limitless Options  
for the following applications:

TCP's LED Area Lights are designed for outdoor lighting applications requiring bright, white light, energy savings and robust performance. The long 50,000 hour rated life significantly decreases maintenance, labor and material costs over the life of the fixture.

The slim, low-profile, 3G vibration rated die-cast aluminum housing is IP65 rated. An adjustable slip-fitter mount for 2 3/8" O.D. arms or tenons is standard. Additional mounting accessories are available for round or square pole, wall mount, and trunnion mount applications. A 7-pin NEMA photocontrol receptacle is standard for the addition of wireless control nodes or 3-pin or 7-pin photocontrols. A shorting cap is supplied with each luminaire in case controls are not required.

- HID Shoebox Replacements
- Shopping Malls
- Parking Lots and Parking Garage Top Level
- Walkways
- Stadium Lots
- Campuses
- Auto Dealerships



5 YEAR WARRANTY

we know light.™

# LED Area Light

## Features/Benefits

|                                                                                     |                                                                                  |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
| Up to 72% less energy than traditional HID                                          | Instant energy savings and potential rebate eligibility                          |
| Long 50,000 hour rated life                                                         | Minimizes replacements and labor costs                                           |
| Integrated 7-pin NEMA photocontrol receptacle with shorting cap                     | Comes standard; 3-pin or 7-pin photocontrol or wireless control node can be used |
| Mercury free                                                                        | Great for all environments                                                       |
| Die-cast aluminum housing with acrylic optics                                       | Provides Types III, IV or V distributions to fit any project                     |
| IP65 Rated                                                                          | Suitable for outdoor installation                                                |
| Easy to install - Adjustable slip-fitter for 2 3/8" O.D. arms or tenons is standard | Additional mounting accessories available for versatile mounting options         |
| Light weight and Low EPA                                                            | Reduces stress on existing poles                                                 |

## Specifications

|                           |                                                               |
|---------------------------|---------------------------------------------------------------|
| Input Line Voltage        | 120-277VAC or 347/480VAC                                      |
| Input Line Frequency (Hz) | 50/60HZ                                                       |
| Lumens / Wattage          | 13,500L (100W), 24,500L (200W), 40,000L (300W)                |
| Lumens per Watt (LPW)     | 122 - 138 LPW                                                 |
| Color Temperature (CCT)   | 4000K, 5000K                                                  |
| Dimming                   | 0-10VDC dimming via 7-pin NEMA Photocontrol receptacle        |
| Controls                  | NEMA 7-pin Photocontrol Receptacle with Shorting Cap provided |
| Rated Life                | >50,000 hours                                                 |
| Operating Temperature     | -40°C to 45°C                                                 |
| CRI                       | 70+                                                           |
| Power Factor              | >0.9                                                          |
| THD                       | <20%                                                          |

## Warranty

Five year limited warranty against defects in manufacturing

## Replacement Comparison

| Type                                     | Wattage     | Energy Savings (%) |
|------------------------------------------|-------------|--------------------|
| <b>TCP Area Light A1 - 13,500 Lumens</b> | <b>100W</b> | <b>-</b>           |
| 250W Metal Halide                        | 295W        | 66%                |
| 400W Metal Halide                        | 458W        | 78%                |
| <b>TCP Area Light A2 - 24,500 Lumens</b> | <b>200W</b> | <b>-</b>           |
| 400W Metal Halide                        | 458W        | 56%                |
| 1000W Metal Halide                       | 1081W       | 81%                |
| <b>TCP Area Light A3 - 40,000 Lumens</b> | <b>300W</b> | <b>-</b>           |
| 400W Metal Halide                        | 458W        | 34%                |
| 1000W Metal Halide                       | 1081W       | 72%                |



To view our DLC qualified products, please consult the DLC Qualified Products List at [www.designlights.org/apl](http://www.designlights.org/apl).

### Applications

TCP's LED Area Lights feature a low profile, 3G vibration rated design that delivers a bright, uniform light while saving energy over traditional HID sources. Maintenance costs are virtually eliminated over their long-rated life. Applications include parking lots, walkways, auto dealerships, campuses and other public areas.

### Construction


- Visually appealing slim, low-profile design
- Heavy duty die-cast aluminum housing
- Durable UV stabilized powder coat finish
- Adjustable slip-fitter mount standard for easy installation.
- Round pole, Square pole, wall mount and trunnion mount accessories available

### Electrical

- NEMA 7-pin photocontrol receptacle with shorting cap accepts 3-pin or 7-pin photocontrols or wireless control nodes
- System rated for long 50,000 hour rated life
- cULus wet location rated
- 4kV surge suppression comes standard

### Optics

- Durable acrylic optics resist yellowing
- Distribution Type III standard, Types IV and V optional

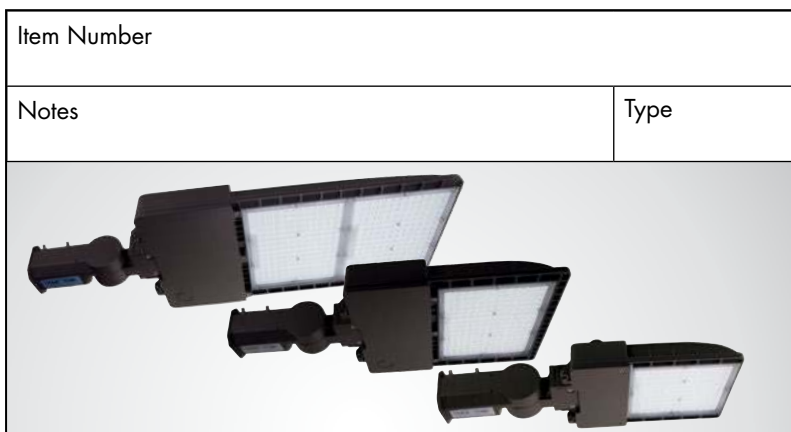

#### Listings

cULus Listed – wet location rated  
RoHS Compliant  
DLC 4.3 Premium  
IP65 Rated  
3G Vibration Rated

#### Installation

Surface or pole mounted  
Before installation, please consult your local ordinances and building codes for compliance

#### Warranty

Five year limited warranty against defects in manufacturing

### Lumen Maintenance

| Lumen Maintenance Factor (LMF) |                           |                           |                            |                                               |
|--------------------------------|---------------------------|---------------------------|----------------------------|-----------------------------------------------|
| Lumen Package                  | 36,000 hours <sup>1</sup> | 50,000 hours <sup>1</sup> | 100,000 hours <sup>2</sup> | Reported L <sub>70</sub> (hours) <sup>1</sup> |
| A1                             | 90.23%                    | 86.77%                    | 75.43%                     | >54,000                                       |
| A2                             | 91.00%                    | 87.86%                    | 77.48%                     | >60,000                                       |
| A3                             | 91.61%                    | 88.47%                    | 78.11%                     | >54,000                                       |

<sup>1</sup> IESNA TM-21-11 projected value based on 6X IESNA LM-80-08 total test duration.  
<sup>2</sup> IESNA TM-21-11 calculated value exceeds 6X IESNA LM-80-08 total test duration.

### Catalog Ordering Matrix Example: ALUZDA1T340KN7BR

| AL              |                              | ZD                 |                                                                                  |                                              |                            | N7                                | BR          |                    |
|-----------------|------------------------------|--------------------|----------------------------------------------------------------------------------|----------------------------------------------|----------------------------|-----------------------------------|-------------|--------------------|
| FAMILY          | VOLTAGE                      | DIMMING            | LUMENS PACKAGE (Power) <sup>1,2</sup>                                            | DISTRIBUTION <sup>3</sup>                    | CCT                        | PHOTOCELL RECEPTACLE <sup>4</sup> | COLOR       | OPTIONS            |
| AL – Area Light | U – 120-277V<br>H – 347/480V | ZD – 0-10V Dimming | A1 – 13500 Lumens (100W)<br>A2 – 26500 Lumens (200W)<br>A3 – 40000 Lumens (300W) | T3 – Type III<br>T4 – Type IV<br>T5 – Type V | 40K – 4000K<br>50K – 5000K | N7 – NEMA 7-PIN                   | BR – Bronze | MS – Motion Sensor |

<sup>1</sup> Approximate lumen output. Actual performance may be based on CCT, options selected and end user application. <sup>2</sup> Actual wattage may differ by +/- 10%.

<sup>3</sup> Type III Standard. Types IV and V require additional lead time. Consult factory for details. <sup>4</sup> Shorting Cap provided. Can be used with a standard 3-pin or 7-pin photocontrol or a wireless control node.

### Mounting Accessories



#### ALWALLMOUNT

The Wall Mount accessory is field installed and includes a heavy duty aluminum plate to secure it to the wall.



#### ALRPOLEMOUNT

The optional round or square pole mount accessory is field installed and can be used with 4" or 5" square or round poles. Round pole adapter is included.



#### ALTRUNNION

The optional trunnion mount is field installed.





#### ALSLIPFITTER


The standard cast aluminum slipfitter mount secures the luminaire to nominal 2" (2 3/8" O.D. pipe size) horizontal arm or vertical tenon.

# LED Area Light


## EPA of Area Light

| Lumen Package                  |  |  |  |  |  |  |  |
|--------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                                | 1                                                                                 | 2 @90°                                                                            | 2 @120°                                                                           | 2@180°                                                                            | 3 @90°                                                                             | 3 @120°                                                                             | 4 @90°                                                                              |
| A1<br>(13,500 Lumens,<br>100W) | 0.3413                                                                            | 0.5929                                                                            | 0.7983                                                                            | 0.6826                                                                            | 1.0239                                                                             | 1.0499                                                                              | 1.0239                                                                              |
| A2<br>(24,500 Lumens,<br>200W) | 0.423                                                                             | 0.735                                                                             | 0.873                                                                             | 0.846                                                                             | 1.158                                                                              | 1.185                                                                               | 1.158                                                                               |
| A3<br>(40,000 Lumens,<br>300W) | 0.4759                                                                            | 0.7889                                                                            | 1.0581                                                                            | 0.9518                                                                            | 1.2648                                                                             | 1.3711                                                                              | 1.2648                                                                              |

## Dimensions

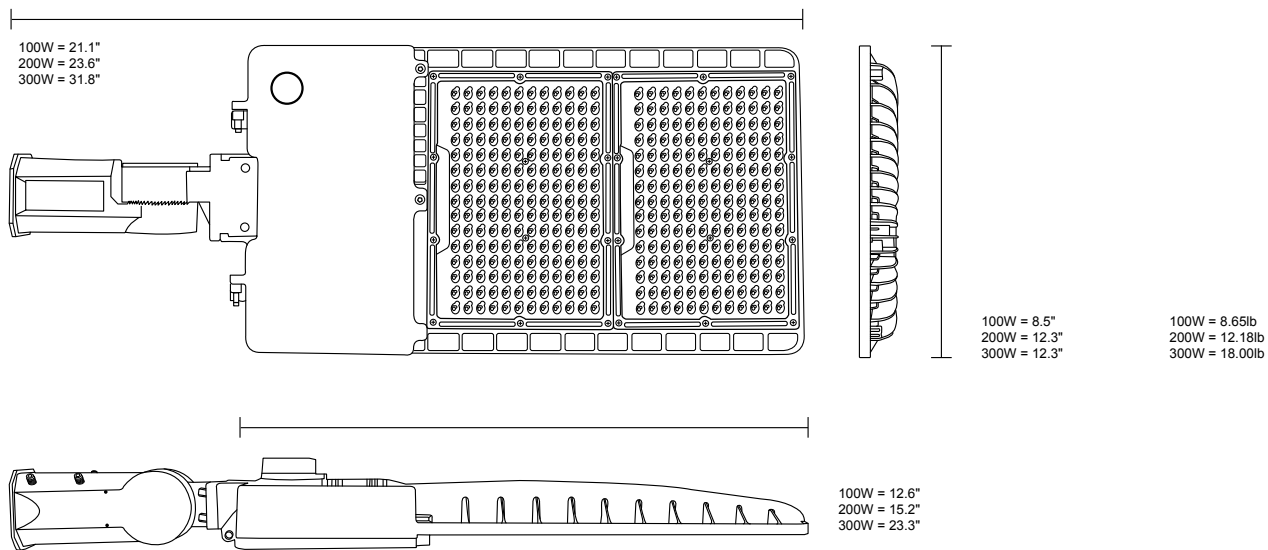

## Mounting Dimensions

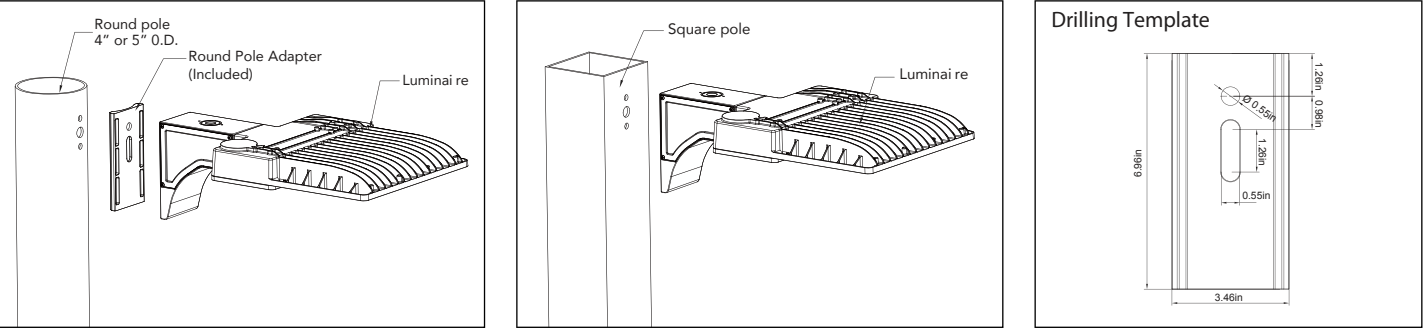

#### Performance Data


| Lumen Package | Number of Drivers | System Watts | Drive Current(mA) | Input Voltage     | Distribution Type | 4000K 70CRI |     | 5000K 70CRI |     |
|---------------|-------------------|--------------|-------------------|-------------------|-------------------|-------------|-----|-------------|-----|
|               |                   |              |                   |                   |                   | Lumens      | LPW | Lumens      | LPW |
| A1            | 1                 | 100          | 2450              | 120-277V Only     | III               | 13,579      | 136 | 13,846      | 138 |
|               |                   |              |                   |                   | IV                | 13,201      | 132 | 13,347      | 133 |
|               |                   |              |                   |                   | V                 | 13,899      | 139 | 14,182      | 142 |
| A2            | 1                 | 200          | 5100              | 120-277V 347/480V | III               | 25,151      | 126 | 25,765      | 129 |
|               |                   |              |                   |                   | IV                | 24,635      | 123 | 24,887      | 124 |
|               |                   |              |                   |                   | V                 | 25,089      | 125 | 25,880      | 129 |
| A3            | 1                 | 300          | 6000              | 120-277V 347/480V | III               | 40,033      | 133 | 40,311      | 134 |
|               |                   |              |                   |                   | IV                | 39,699      | 132 | 39,977      | 133 |
|               |                   |              |                   |                   | V                 | 41,698      | 139 | 42,728      | 142 |

#### Photometric Report

Based on photometric data for

TCP Item # **ALUZDA2T340KN7BR**


##### Polar Graph

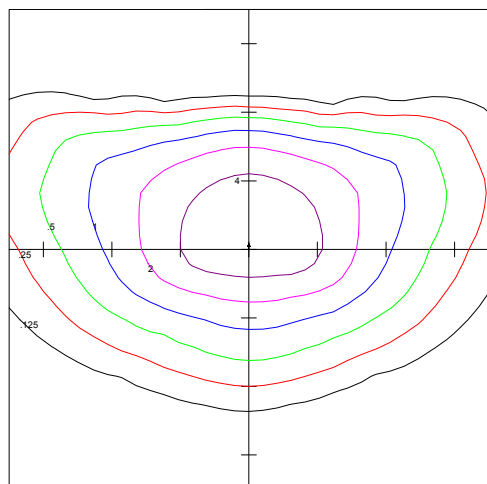

Horizontal Footcandles  
Scale: 1 Inch = 25 Ft.  
Light Loss Factor = 1.00  
Lumens Per Lamp = N.A. (absolute photometry)  
Luminaire Lumens = 25151  
Mounting Height = 25.00 Ft  
Maximum Calculated Value = 7.11 Fc  
Arrangement: Single

TCP Item # **ALUZDA2T440KN7BR**


##### Polar Graph

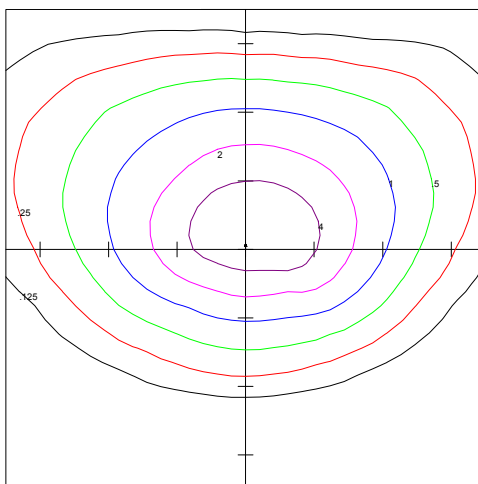

Horizontal Footcandles  
Scale: 1 Inch = 25 Ft.  
Light Loss Factor = 1.00  
Lumens Per Lamp = N.A. (absolute photometry)  
Luminaire Lumens = 24635  
Mounting Height = 25.00 Ft  
Maximum Calculated Value = 7.55 Fc  
Arrangement: Single

TCP Item # **ALUZDA2T540KN7BR**

##### Polar Graph

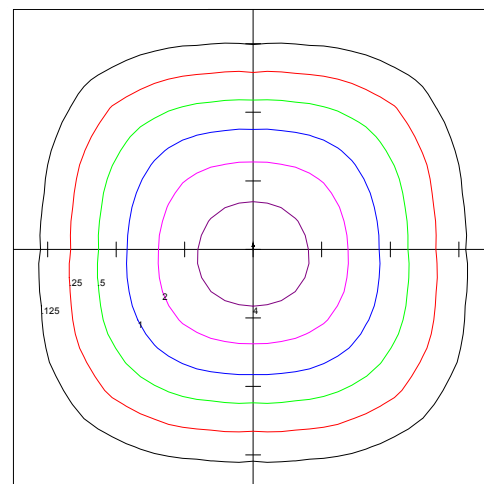

Horizontal Footcandles  
Scale: 1 Inch = 25 Ft.  
Light Loss Factor = 1.00  
Lumens Per Lamp = N.A. (absolute photometry)  
Luminaire Lumens = 25089  
Mounting Height = 25.00 Ft  
Maximum Calculated Value = 5.86 Fc  
Arrangement: Single

# TECHNOLOGY CAST IN A BEAUTIFUL LIGHT

For over 20 years, TCP has been designing, developing and delivering energy-efficient lighting into the market. Thanks to our cutting-edge technology and manufacturing expertise, we have shipped billions of high quality lighting products. With TCP, you can count on a lighting product that is designed to meet the needs of the market — that transforms your surroundings and envelopes you in warmth — lighting that generates beauty with every flip of the switch.

