



LED U6 SERIES

DIrect LED U6 - FB34

COMMERCIAL SPEC GRADE


Replaces 32W FB34 Fluorescent U6



FEATURES

- DIrect Replacement for Easy Installation
- Universal Input Voltage - 120-277V, 347V
- Uniform Light Output From End-to-End
- Instant-ON with No Flicker
- 5-Year Warranty
- DLC 4.1 Listed
- UL Listed

Superior All-Around Light Distribution



Shatter-Resistant



Designed for high efficiency and versatility, the IC-Driver allows for exceptional DIrect performance

Seamless output from end-to-end, **ARCHIPELAGO®** Light Engine allows for fully uniform light output




Specifications and Technical (U6 | DIrect)

MODEL	BASE TYPE	WATTS / EQV.	LUMEN	CCT	DIMENSION	VOLTAGE	CRI	THD	CARTON QTY	LIGHT DISTRIBUTION
LBU6D13301	Bi-Pin G13	13W / 32W	1800LM	3000K	6.0" x 22.5"	120-277, 347V	83	<20%	16	310°
LBU6D13351	Bi-Pin G13	13W / 32W	1800LM	3500K	6.0" x 22.5"	120-277, 347V	83	<20%	16	310°
LBU6D13411	Bi-Pin G13	13W / 32W	1800LM	4100K	6.0" x 22.5"	120-277, 347V	83	<20%	16	310°
LBU6D13501	Bi-Pin G13	13W / 32W	1800LM	5000K	6.0" x 22.5"	120-277, 347V	83	<20%	16	310°

* Suitable for use in totally enclosed fixtures

** Suitable for damp locations. Not for use where exposed to the weather or moisture

Installation Configuration

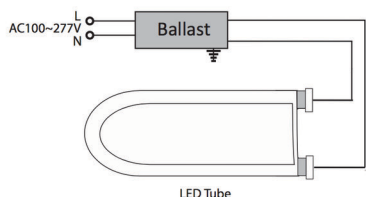

DIrect

Light Distribution Curve

