



DESCRIPTION

Featuring selectable wattage and color temperatures that allow you to adjust the light output as needed, these mini LED wall packs are an efficient choice for improving security lighting in outdoor areas.

FEATURES

- Delivers up to 135 LPW depending on the wattage selected
- Replaces 50-70W metal halide fixtures
- Integrated photocell for dusk till dawn operation
- Wattage and color temperature are adjusted via dip switch inside of fixture; see installation instructions for more information.

LISTINGS

- IP65 Rated
- UL Listed for wet locations
- BUG: B1-U3-G2
- IK08
- DesignLights Consortium® 5.1 Premium - meets the requirements for the highest DLC qualification for efficacy and lumen maintenance; DLC PN: PLTSN311311W

PERFORMANCE

- CRI: 80+
- CCT: 3000K, 4000K, 5000K
- Rated Lifetime LED L70: 100,000 Hours

ELECTRICAL

- THD: ≤ 20%
- Power Factor: ≥ 0.9
- Input Voltage: 120-277V
- Surge Protection: 2.5kV

THERMAL

- -40°F to 113°F (-40°C to 45°C) operating temperature

CONSTRUCTION

- Die-cast aluminum housing with white finish
- Polycarbonate lens

WARRANTY

- 5-year limited warranty; see pltsolutions.com for warranty details

Project name	Type
Catalog number	
Comments	Voltage
Approved by	Date



APPLICATIONS

- Security Lighting
- Pedestrian Lighting
- Parking Areas

PERFORMANCE SUMMARY


Item #	Watts*	CRI	CCT*	Lens	Voltage	Replaces	DLC #	DLC Level
PLT-13597	8/ 10/ 15	80+	3000K/ 4000K/ 5000K	Polycarbonate	120-277V	MH50-70	PLTSN311311W	5.1 Premium

*See Selectable Table for full breakdown

SELECTABLE TABLE

Wattage	CCT	Lumens	Efficacy
8	3000K	1008	126
	4000K	1077	134
	5000K	1048	131
10	3000K	1274	127
	4000K	1342	134
	5000K	1325	132
15	3000K	1901	126
	4000K	2033	135
	5000K	1978	131

DIMENSIONS

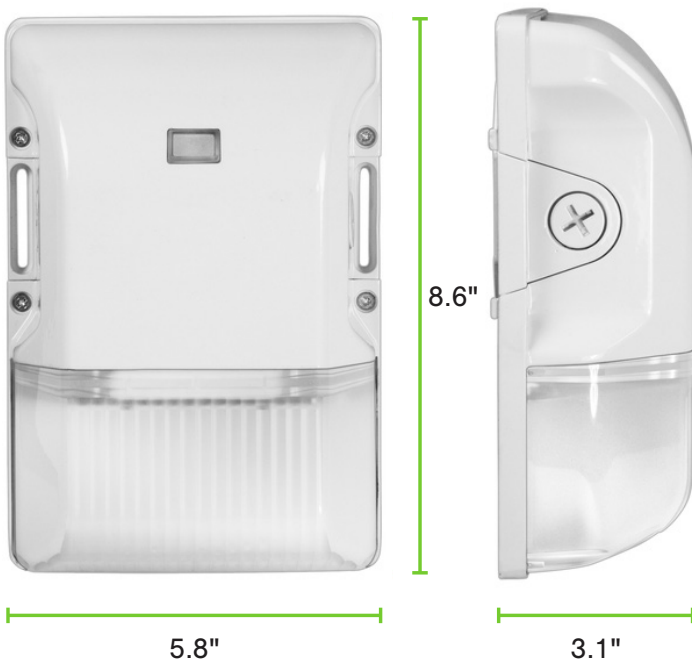

DIMENSIONS

Length – 8.6"

Height – 3.1"

Width – 5.8"

Weight – 2.3 lbs