

### LED Dimmable A-Lamps

25,000 Hours average rated life, 120Volts

#### Applications:


Ideal for dimmable A-lamp applications.

- + General Lighting
- + Sconces
- + Table Lamps
- + Floor Lamps
- + Ceiling Fixtures




#### Features and Benefits

- Smooth, uniform dimming from 100% to 5%.
- Energy Efficient: Up to 80% less energy than standard incandescent.
- Exceeds all industry performance requirements for non-standard lamps.
- Full Range: 270°
- Long life: 25,000 hours
- Very Durable: Solid state lighting technology significantly reduces lighting service & maintenance due to robust lighting design.
- Excellent Color consistency and high color rendering (CRI).
- Rated for enclosed fixtures.

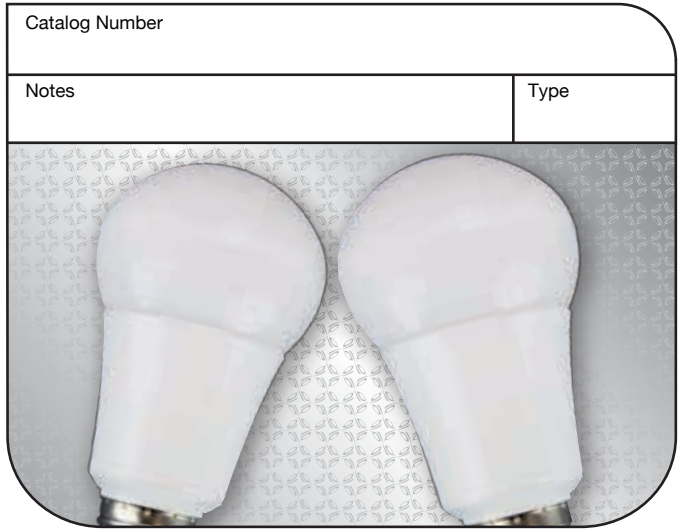

#### Specifications

Input Line Voltage:	120 VAC
Input Power	7W/10W
Input Line Frequency	50/60HZ
Lamp Life (Rated)	25,000 hrs
Minimum Starting Temp	-20°C
Maximum Operating Temp	40°C

Warranties and Certifications:	Item #	Description	Voltage	Wattage	Replacement	Lumens	LPW	M.O.L. (inches)	Diameter (inches)	CCT	CRI	STK/MTO	Case Quantity	
 <b>5 YEAR WARRANTY</b> <small>based on 12 hours use per day</small>	<b>Dimmable 10W A19 Omni</b>													
	LED10A19D0D24K	10W Omni-Directional A19 - 2400K	120	10	60	800	80.0	4.4	2.4	2400K	82	STK	12	
	LED10A19D0D27K	10W Omni-Directional A19 - 2700K	120	10	60	800	80.0	4.4	2.4	2700K	82	STK	12	
	LED10A19D0D30K	10W Omni-Directional A19 - 3000K	120	10	60	825	82.5	4.4	2.4	3000K	82	STK	12	
	LED10A19D0D41K	10W Omni-Directional A19 - 4100K	120	10	60	850	85.0	4.4	2.4	4100K	82	STK	12	
	<b>Dimmable 7W A19 Omni</b>													
	LED7A19D0D24K	7W Omni-Directional A19 - 2400K	120	7	40	450	64.3	4.4	2.4	2400K	82	STK	12	
	LED7A19D0D27K	7W Omni-Directional A19 - 2700K	120	7	40	450	64.3	4.4	2.4	2700K	82	STK	12	
	LED7A19D0D30K	7W Omni-Directional A19 - 3000K	120	7	40	475	67.9	4.4	2.4	3000K	82	STK	12	
	LED7A19D0D41K	7W Omni-Directional A19 - 4100K	120	7	40	500	71.4	4.4	2.4	4100K	82	STK	12	
	<b>Non-Dimmable 10W A19 Omni</b>													
	RLA010W27KND	10W Omni-Directional A19 - 2700K	120	10	60	800	80.0	4.4	2.4	2700K	82	STK	12	
	LED10A19D30K	10W Omni-Directional A19 - 3000K	120	10	60	825	82.5	4.4	2.4	3000K	82	STK	12	
	<b>7W A19 Omni</b>													
	LED7A19D0D27K	7W Omni-Directional A19 - 2700K	120	7	40	450	64.3	4.4	2.4	2700K	82	STK	12	
	LED7A19D0D30K	7W Omni-Directional A19 - 3000K	120	7	40	475	67.9	4.4	2.4	3000K	82	STK	12	