



REV 08.29.18

ATOMIC TOPLESS DOUBLE INDUSTRIAL GUARD SCONCE

BARN LIGHT WALL SCONCE COLLECTION

Max Weight: 10.0 lbs

PROJECT NAME _____

PROJECT TYPE _____

SPS-0198



Order Example: BLE - G - CCG2H - G39 - 975 - TGG - 100 - SMK - E26 - NA

| A - FINISHES | |
|------------------------------|-------------------|
| <i>POWDER COAT FINISHES:</i> | |
| 100 | Black |
| 105 | Textured Black |
| 200 | White |
| 300 | Dark Green |
| 307 | Emerald Green |
| 311 | Jadite |
| 370 | Mint |
| 380 | Chartreuse |
| 390 | Teal |
| 400 | Barn Red |
| 420 | Orange |
| 470 | Watermelon |
| 480 | Blush Pink |
| 490 | Magenta |
| 500 | Buttery Yellow |
| 570 | Sunflower |
| 600 | Bronze |
| 601 | Chocolate |
| 605 | Rust |
| 615 | Oil-Rubbed Bronze |
| 700 | Royal Blue |
| 705 | Navy |
| 710 | Cobalt Blue |
| 715 | Delphite Blue |
| 800 | Industrial Grey |
| 805 | Charcoal Granite |
| 810 | Graphite |
| 975 | Galvanized |

| B - CAST GUARD OPTION | |
|-----------------------|-----------------------|
| WGG | Wire Guard |
| CGG | Standard Cast Guard |
| TGG | Heavy Duty Cast Guard |

C - CAST GUARD FINISH

Please Note: See Section A for all applicable Cast Guard Finish options.


| D - GLASS OPTIONS | |
|-------------------|--------------------------|
| CLR | Clear Glass ¹ |
| FST | Frosted Glass |
| RIB | Ribbed Glass |
| CCR | Clear Crackle Glass |
| SMK | Smoke Crackle Glass |
| HCR | Honey Crackle Glass |

| E - LIGHT SOURCE | |
|------------------|---------------------------------|
| E26 | 100 Watt Max |
| GU24 | 24 Bi-Pin, 18W Max ² |
| LED16.8 | 16W LED, 1600 LM |

| F - COLOR TEMPERATURE ³ | |
|------------------------------------|----------------------|
| NA | Not Applicable |
| 2700K | 2700K, Warm White |
| 3000K | 3000K, Neutral White |
| 3500K | 3500K, Bright White |
| 4000K | 4000K, Cool White |

IMPORTANT: (1) Clear Glass not recommended if LED16.8 Light Source selected in Section E (2) Fixtures configured with a GU24 socket are non-returnable (3) Selection only applicable if LED16.8 Light Source is selected in Section E, select NA if another Light Source is selected

DIMENSIONAL DRAWING

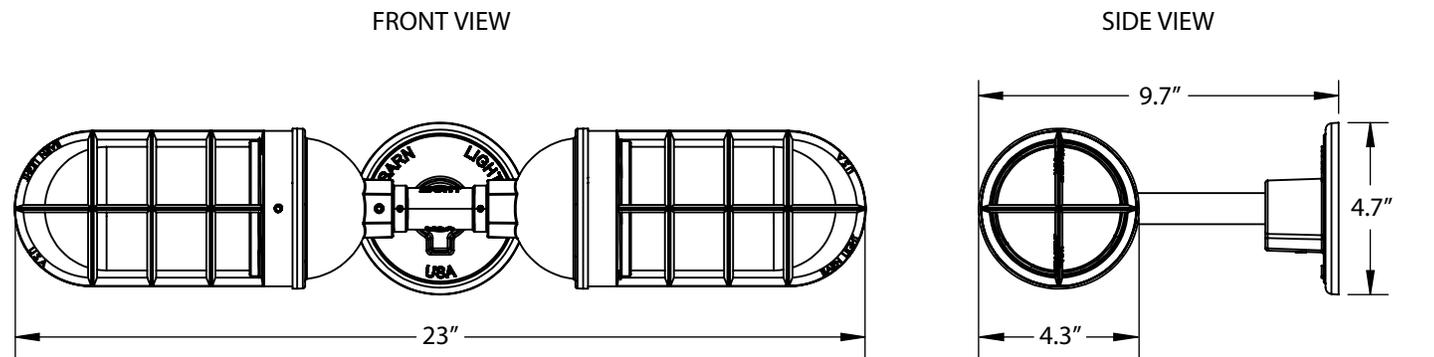

LIGHT SOURCE

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. To obtain an IES file specific to your project, please contact the factory.

| OPTION | WATTAGE | LUMENS <small>*Avg. value, actual value dependent on bulb used</small> | CRI | VOLTAGE | DIMMING |
|---------------------------------------|----------|---|------|---------|----------------|
| INCANDESCENT (MED E26) | | | | | |
| E26 | 100W Max | 1600* | 100* | 120 VAC | Bulb Dependant |
| COMPACT FLOURESCENT (GU24 CFL) | | | | | |
| GU24 | 18W Max | 1600* | 75* | 120 VAC | Bulb Dependant |
| LED | | | | | |
| LED16.8 | 16W | 1600 | >90 | 120 VAC | TRIAC |

SPECIFICATIONS

LED SPECIFICATIONS

LUMEN MAINTENANCE

LED16.8 Source is L90(11K) > 61,000 Hours.

COLOR TEMPERATURES

Standard Color Temperatures Available Include 2700K, 3000K, 3500K and 4000K. Custom Temperatures Available upon Request.

CRI

Minimum 90 CRI, Consult Factory for Other CRI Options

EFFICACY

Delivers over 95 Lumens per Watt

DRIVER & DIMMING OPTION

Reliant on Triac Dimming 16.8W / 120V, Dimmable down to 1% Depending on Dimmer. Requires Compatible Dimming Switch.

FINISHES

POWDER COAT FINISHES

Polyester Powder Coat Finishes Are Electro-Statically Applied and Thermocured

CERTIFICATIONS, LISTINGS & WARRANTY

MADE IN THE USA

Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility Located in Titusville, FL

CSA LISTED FOR WET LOCATIONS

Only When Mounted Horizontally


LIMITED WARRANTY

For Additional Information on Our Limited Warranty, Please See Our Terms & Conditions




Different accessories completely alter the look and feel of a light. By selecting a durable cast guard and glass or a rugged wire cage, our lights take on a trendy industrial character. Not only are these accessories stylish, but they also protect the bulb in commercial or industrial settings!


GUARD OPTIONS

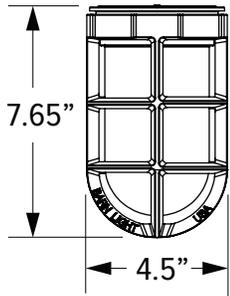

TGG Heavy Duty Cast Guard

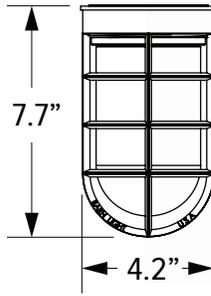

CGG Standard Cast Guard

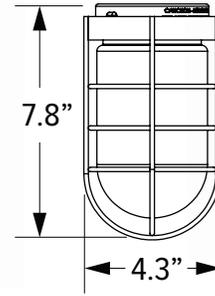

WGG Wire Guard



GLASS OPTIONS

Not Applicable with Halogen Lights



CLR
Clear




FST
Frosted



RIB
Ribbed

WIRE CAGE

Not Applicable with Guard and Glass or Select Shade Styles

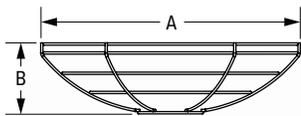

WC Wire Cage


| DIAMETER (A) | HEIGHT (B) |
|--------------|------------|
| 8" | 2.7" |
| 10" | 2.9" |
| 11" | 3.2" |
| 12" | 3.4" |
| 13" | 3.7" |
| 14" | 3.9" |
| 15" | 4.2" |
| 16" | 4.4" |
| 17" | 4.7" |
| 18" | 4.9" |
| 20" | 5" |

ACRYLIC DIFFUSER

Not Applicable with Guard and Glass, GU24 Sockets, or Select Shade Styles



Shade Not Included



ACR Acrylic Diffuser

*Please contact Barn Light Electric with any questions regarding applicable shade sizes and light sources.