

FEATURES & SPECIFICATIONS

INTENDED USE

Provides general illumination in commercial and residential applications. Ideal for use in closets, foyers, hallways, corridors, bedrooms, offices, utility work areas, stairways and more.

CONSTRUCTION

Features a white acrylic diffuser and is available in 11" and 14" sizes. Hidden cam-latches provide easy diffuser removal for installation and maintenance.

OPTICS

11" units produce 1100 lumens and 14" units produce 1600 lumens, both at 50,000 hours life.

ELECTRICAL

Fixture operates at 120 volts, 60 Hz. 11" Standard input = 16 watts, 69 lumens per watt.

14" Standard input = 24 watts, 67 lumens per watt.

Works with most standard incandescent dimmers (see list of approved dimmers).

INSTALLATION

All mounting hardware included.

LISTINGS

cUL Certified to US and Canadian standards and listed suitable for damp locations. ENERGY STAR® certified

WARRANTY

5-year limited warranty. Complete warranty terms located at

www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

NOTE: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25°C.

Specifications subject to change without notice.

Catalog Number
Notes
Type

Decorative Indoor

LED Low Profile Square Flush Mount



HIGH-PERFORMANCE LED



Specifications

Height: FMLSL 11 – 2-7/8 (7.3)

FMLSL 14 – 3-1/8 (7.9)

Width: FMLSL 11 – 11 (27.9)

FMLSL 14 – 13-11/16 (34.7)

All dimensions are inches (centimeters) unless otherwise indicated.

ORDERING INFORMATION

For shortest lead times, configure product using **bolded options**.

Example: FMLSL 11 14840



Series	Module/CRI	Color temperature
FMLSL 11 11" LED low profile square flush mount	148 >80	40 4000 K
FMLSL 14 14" LED low profile square flush mount	208 >80	35 3500 K ¹
		30 3000 K
		27 2700 K ¹

Notes

¹ Minimum 90-day lead time for non-standard color temperatures; minimum 50 order quantity.

LED Low Profile Square Flush Mount

LIGHTING FACTS

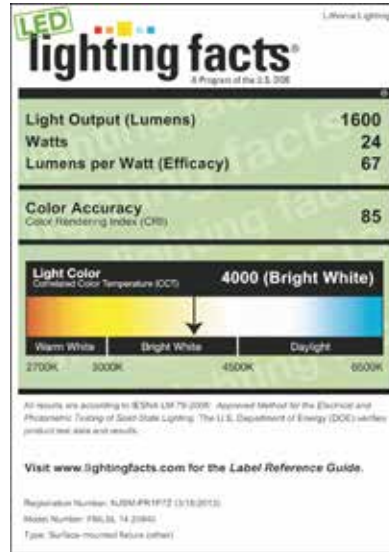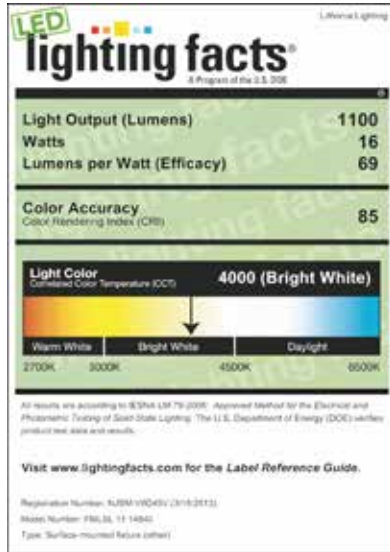


SUGGESTED DIMMERS

The FMLSL is designed to operate with most standard Triac Based (Forward Phase-Control or Leading Edge) dimmers and is not compatible with 0-10v dimming systems. The following is a list of dimmers tested and does not imply any guarantee or warranty of compatibility with a particular application. Unlisted dimmers do not imply non-compatibility.

Manufacturer	Part number(s)
Leviton	6633P
	IPL06
	6674P
	IPE04
	Trimatron 600W
Lutron	DVELV 300P
	Skylark 300P
	NTELV 300
	NLV 600
Synergy	ISD 600 I 120

PHOTOMETRICS

FMLS 11 14840, test no. LTL23006, tested in accordance to IESNA LM-79.

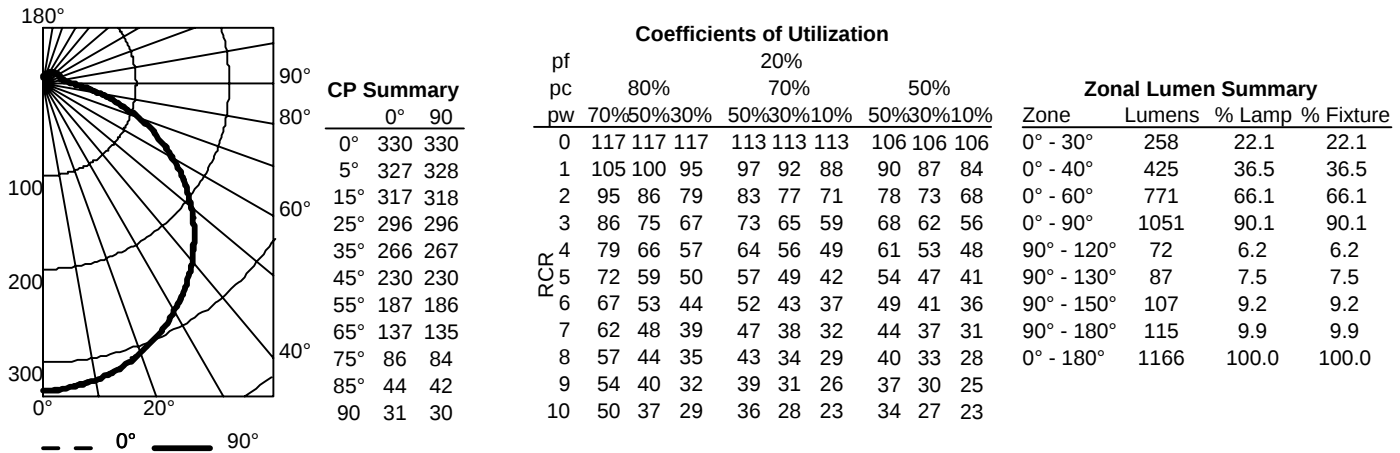

FMLS 14 20840, test no. LTL23005, tested in accordance to IESNA LM-79.

