



Wattage and Color Selectable LED Mini Wall Pack

DESCRIPTION

Featuring selectable wattage and color temperatures that allow you to adjust the light output as needed, these LED mini wall packs are an efficient choice for improving security lighting in outdoor areas.

FEATURES

- Delivers up to 136 LPW depending on the wattage selected
- Replaces up to 100W metal halide fixtures
- Integrated photocell for dusk till dawn operation
- Wattage and color temperature are adjusted via dip switch inside of fixture; see installation instructions for more information.

LISTINGS

- IP65 Rated
- UL Listed for wet locations
- BUG: B1-U3-G2
- DesignLights Consortium® 5.1 Premium - meets the requirements for the highest DLC qualification for efficacy and lumen maintenance

PERFORMANCE

- CRI: 80+
- CCT: 3000K, 4000K, and 5000K
- Rated Lifetime L70: 50,000 hours

ELECTRICAL

- THD: ≤ 20%
- Power Factor: ≥ 0.9
- Input Voltage: 120-277V

THERMAL

- -40°F to 113°F (-40°C to 45°C) operating temperature

CONSTRUCTION

- Die-cast aluminum housing with bronze or white finish
- Polycarbonate lens

WARRANTY

- 5-year limited warranty; see pltsolutions.com for warranty details

Project name	Type
Catalog number	
Comments	Voltage
Approved by	Date



APPLICATIONS

- Security Lighting
- Pedestrian Lighting
- Parking Areas

PERFORMANCE SUMMARY


Item #	Watts*	CRI	CCT*	Lens	Voltage	Replaces	Finish	DLC #	DLC Level
PLT-13362	8/ 10/ 15	80+	3000K/ 4000K/ 5000K	Polycarbonate	120-277V	MH50	Bronze	PLTSN311111W	5.1 Premium
PLT-13363	20/ 25/ 30	80+	3000K/ 4000K/ 5000K	Polycarbonate	120-277V	MH100-150	Bronze	PLTSN321111W	5.1 Premium
PLT-13364	20/ 25/ 30	80+	3000K/ 4000K/ 5000K	Polycarbonate	120-277V	MH100	White	PLTSN321311W	5.1 Premium

*See Selectable Table for full breakdown

SELECTABLE TABLE

SKU	Wattage	CCT	Lumens	Efficacy
PLT-13362	8	3000K	1008	126
		4000K	1077	136
		5000K	1048	131
	10	3000K	1274	127
		4000K	1342	134
		5000K	1325	133
	15	3000K	1901	128
		4000K	2033	136
		5000K	1978	132
PLT-13363	20	3000K	2495	125
		4000K	2671	134
		5000K	2690	135
	25	3000K	3091	124
		4000K	3308	132
		5000K	3332	133
	30	3000K	3724	124
		4000K	3986	133
		5000K	4015	134
PLT-13364	20	3000K	2495	125
		4000K	2671	134
		5000K	2690	135
	25	3000K	3091	124
		4000K	3308	132
		5000K	3332	133
	30	3000K	3724	124
		4000K	3986	133
		5000K	4015	134

DIMENSIONS

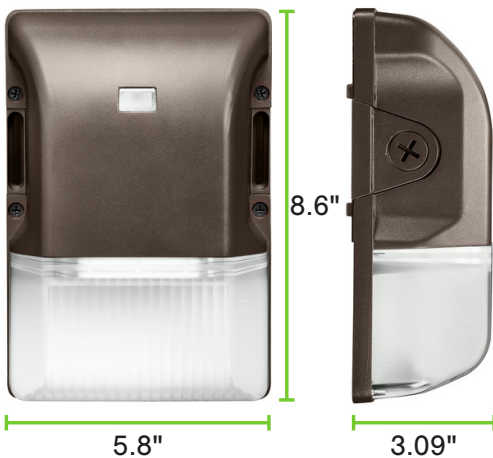

DIMENSIONS

Length – 8.6"

Height – 3.09"

Width – 5.8"

Weight – 1.3 lbs