




SPS-0237 REV B

DUAL ARM FIRE CHIEF SIGN LIGHT

JOB NAME: _____ FIXTURE TYPE: _____



BLE - G - 2ASFC - G55 -

A	B	C	D	E	F
G	H	I			

Order Example: BLE - G - 2ASFC - G55 - ASFC14 - 400 - 12 - 400 - NA - WC - 100 - DD - E26

A - SHADE SIZE

- ASFC10** (2) 10" Shades
ASFC12 (2) 12" Shades
ASFC14 (2) 14" Shades

B - FINISHES**POWDER COAT FINISHES¹:**

- 100** Black
105 Textured Black
200 White
300 Dark Green
307 Emerald Green
311 Jadite
370 Mint
380 Chartreuse
390 Teal
400 Barn Red
420 Orange
470 Watermelon
480 Blush Pink
490 Magenta
495 Sherbet Orange
500 Buttery Yellow
570 Sunflower
600 Bronze
601 Chocolate
605 Rust
615 Oil-Rubbed Bronze
700 Royal Blue
705 Navy
710 Cobalt Blue
715 Delphite Blue
790 Lavender
800 Industrial Grey
805 Charcoal Granite
810 Graphite
975 Galvanized

NATURAL FINISHES²:

- 995** Raw Copper
996 Weathered Copper
997 Raw Brass
998 Weathered Brass
999 Oil-Rubbed Copper

C - ARM PROJECTION

- 12** 12" Arm Projection
24 24" Arm Projection
36 36" Arm Projection

D - MOUNTING FINISH

Please Note: See **Section B** for all applicable Mounting Finish Options. Additionally, 980-Brushed Aluminum is available.
 (1) If a Natural Finish is selected, please note the wall backing plate, (2) elbows, (2) hex couplers and t-joint will come in a 980-Brushed Aluminum finish. Optional Copper/Brass Backing Plate is available.

- 980** Brushed Aluminum

E - SWIVEL KNUCKLE

- NA** None/No Swivel Knuckle
SWK Swivel Knuckle

F - WIRE CAGE

- NA** None/No Wire Cage
WC Wire Cage³

G - WIRE CAGE FINISH

Please Note: See **Section B** for all applicable Wire Cage Finish Options.
 (I) Wire Cage not available in Natural Finishes, Powder Coat Finishes only.
 (II) Select NA if no Wire Cage is selected in Section F.

- NA** Not Applicable

H - MOUNTING ACCESSORY



- NA** None
DBPC Copper/Brass Backing Plate Cover
DD Dusk-to-Dawn Photocell
HDPC Heavy Duty Backing Plate

I - SOCKET TYPE

- E26** 200 Watt Max
GU24 24 Bi-Pin, 23W Max⁴

IMPORTANT: (1) All Powder Coat finished shades, with the exception of 975-Galvanized, feature a white interior (2) Natural Finishes have a longer estimated lead time, please check the website for exact manufacturing time. There are no returns accepted on Natural Finishes. (3) Wire Cage not available in Natural Finishes (4) Fixtures configured with a GU24 socket are non-returnable

DIMENSIONAL DRAWING

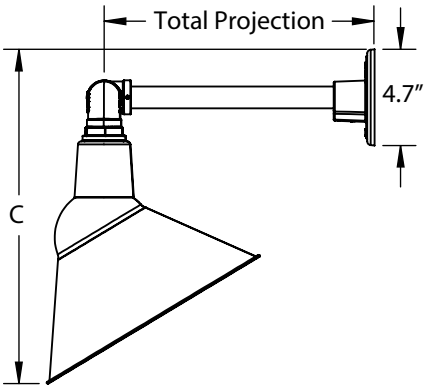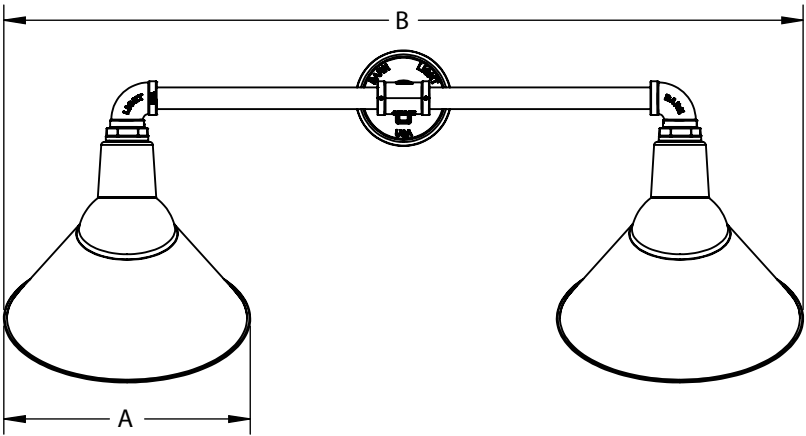

SHADE CODE	DIAMETER (A)	WIDTH (B)	HEIGHT (C)
ASFC10	10"	37"	15"
ASFC12	12"	39"	16"
ASFC14	14"	41"	17.4"

ARM PROJECTION	TOTAL PROJECTION
12 12" Arm Projection	13.1"
24 24" Arm Projection	25.1"
36 36" Arm Projection	37.1"

SPECIFICATIONS

CONSTRUCTION

MOUNTING ARMS
3/4" Nominal (1.05" Actual) Sch 40, 6063 Aluminum Mounting Arms. Custom Lengths Available upon Request.

CERTIFICATIONS, LISTINGS & WARRANTY

MADE IN THE USA
Manufactured and Hand-Crafted in our 60,000 Square Foot Facility Located in Titusville, FL

CSA LISTED FOR WET LOCATIONS

LIMITED WARRANTY
For Additional Information on our Limited Warranty, Please See Our Terms & Conditions

OPERATING TEMPERATURE
-30°C to 40°C

MAX FIXTURE WEIGHT
10 lbs

SHADE & FINISHES

POWDER COATED FIRE CHIEF SHADES
Hand-Spun from High Purity 0.050" Thick 3003-O Temper Aluminum

POWDER COAT FINISHES
Polyester Powder Coat Finishes Are Electro-Statically Applied and Thermocured

LIGHT SOURCE

INCANDESCENT
Medium Base E26 Socket, 200W Max, 120 VAC

COMPACT FLUORESCENT
Bi-Pin Base GU24 Socket, 23W Max, 120 VAC