

SORAA® VIVID 2

LED MR16 2700K 12VAC 8-10W



Narrow Flood and Flood



Narrow Spot



POWERED BY GaN-on-GaN TECHNOLOGY



reddot design award
winner 2013



RoHS

Soraa Inc.

6500 Kaiser Drive,
Fremont, CA 94555
855 GO-SORAA
855 467-6722
www.soraa.com

OUTPUT 1075-4300 CBCP, 320-400 Lumens

BEAM 10°, 20°, 25°, 36°

COLOR CCT: 2700K CRI>95, R9>95

APPLICATION Halogen replacement for unventilated indoor and outdoor applications

PERFORMANCE

CBCP matches standard halogen lamps

Single light source

Single crisp shadow

Dimmable to 20%

Power Factor: 0.93

12V (10.8 min, 13.2 max)

COLOR

CCT: 2700K

CRI>95, R9 95

White point accuracy within 3 SDCM

Rich saturated color rendering

Excellent color stability

OPTIMIZED FORM

ANSI standard MR16 form factor:

1.96" (50mm) W x 1.86" (47.6mm) H

Works in all standard fixtures

Weight: 40g

Proprietary fanless aluminum design
provides superior thermal dissipation

HIGHLY COMPATIBLE

Works with magnetic and electronic
transformers and dimmers (see complete
list at www.soraa.com)

UL and CUL listed for use with 12VAC NEC
Class 1 and Class 2 systems

SPECIFICATIONS*

Reference Number	Product Code	Beam	Field	CBCP	Watts	Halogen Equivalent**	Lumens
MR16-40-B01-12-927-10-2	00263	10°	20°	4300	8	40W	320 (40 lm/W)
MR16-50-B01-12-927-20-2	00215	20°	38°	2550	9.8	50W	400 (41 lm/W)
MR16-50-B01-12-927-25-2	00223	25°	42°	2320	9.8	50W	400 (41 lm/W)
MR16-50-B01-12-927-36-2	00275	36°	60°	1075	9.8	50W	400 (41 lm/W)

*at stable operating conditions in well ventilated fixtures (25°C ambient) **Energy Star Minimum

LONG LIFE, LOW MAINTENANCE

Life of 35,000 hours

Three year warranty

ENERGY EFFICIENT

Saves over 80% of energy compared to
standard halogen lamps

Typical payback of one year or less

INTENDED USE AND APPLICATIONS

LED retrofit lamp to replace 12VAC
halogen MR16 lamps for use in outdoor
sealed or unventilated fixtures, indoor
sealed or unventilated fixtures, or
applications with glass lenses

Not for use in Emergency Fixtures or Exit
Signs

Operating Temperature: Minimum:-40°C
(ambient); Typical: 80-110°C (base);
Maximum: 120°C (base)

Soraa lamps are designed to safely turn
down in any thermal environment not
conductive to minimum airflow or proper
ventilation

CERTIFICATIONS

UL, CUL for 12VAC NEC Class 1 and Class
2 systems, FCC 47 CFR Part 15 and Part 18
(EMI), RoHS, CE, C-tick

12VAC



2700K

CRI
>95

R9
>95



DIM




Form Factor | Base | Voltage | CRI | CCT | Beam
MR16 - 50 - B01 - 12 - 927 - 25

The diagram at left shows how to read the
different components of the reference number.
Base type B01 refers to the GU 5.3 base.


SORAA VIVID 2 MR16 LED 2700K 12VAC 8-10W

PHOTOMETRICS


Narrow Spot - 10°

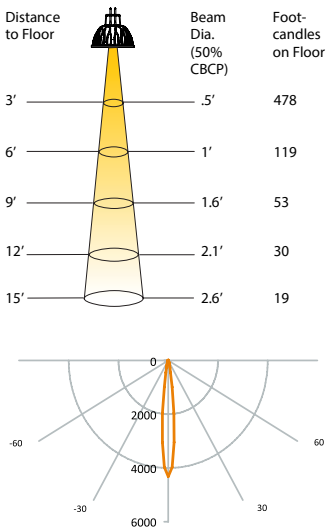


Narrow Flood - 20°

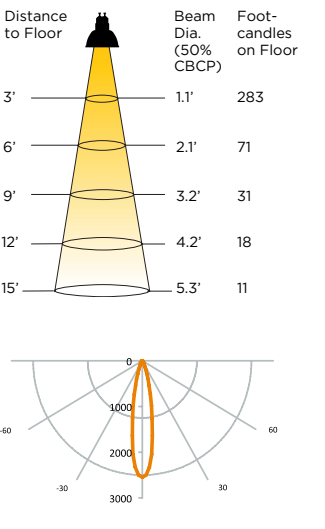


Narrow Flood -25°

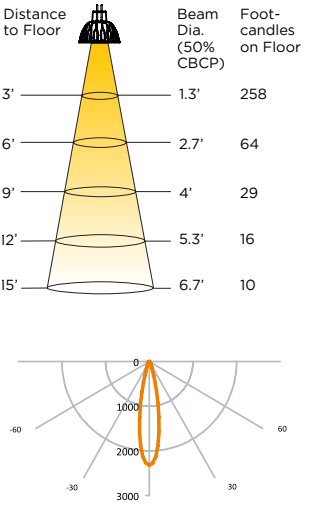



Flood -36°

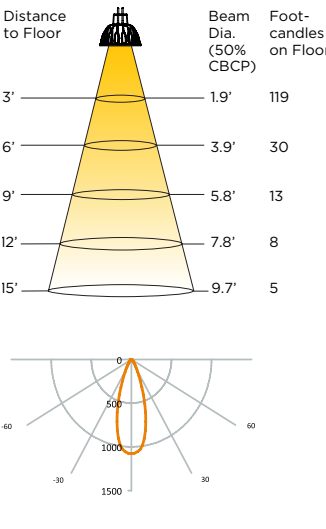

DIMENSIONS

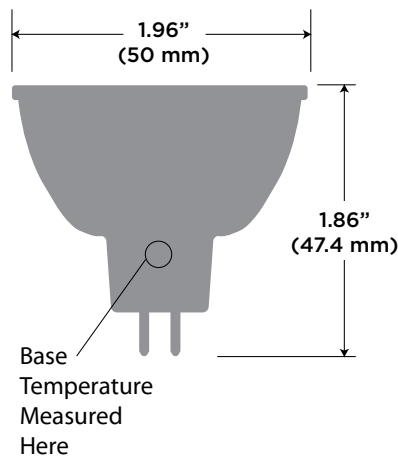

COLOR RENDERING

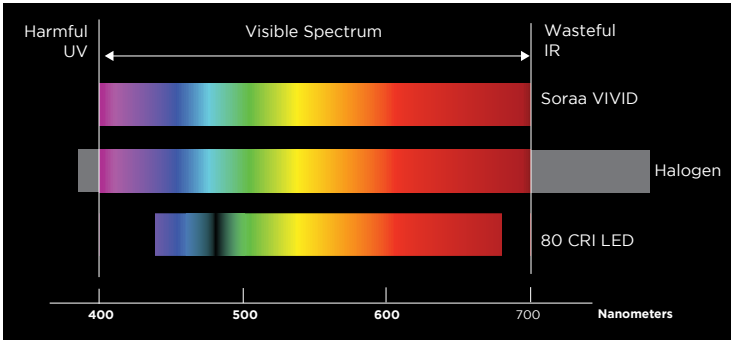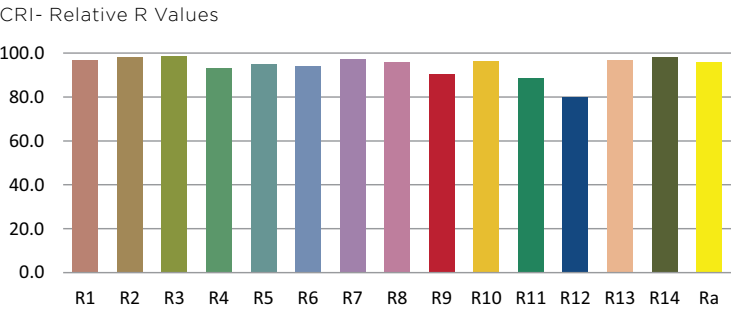

SAFETY NOTE ON HEAT

Soraa's unique LED technology allows its lamps to operate effectively and efficiently at higher temperatures than other LED lamps, resulting in more light output per diode. Although Soraa's lamps operate at cooler temperatures than halogen lamps, it is recommended that gloves be worn when handling bare lamps that have been energized.

TRANSFORMER/DIMMER COMPATIBILITY

Dimmable to 20% or lower, depending on dimmer. Complete transformer and dimmer compatibility information available at www.soraa.com.

Information and specifications subject to change. Rev H 5.17.13 D-110133

Soraa Inc. 6500 Kaiser Drive, Fremont, CA 94555
855 GO-SORAA / 855 467-6722 www.soraa.com