


LED U-Bend T8 Tube

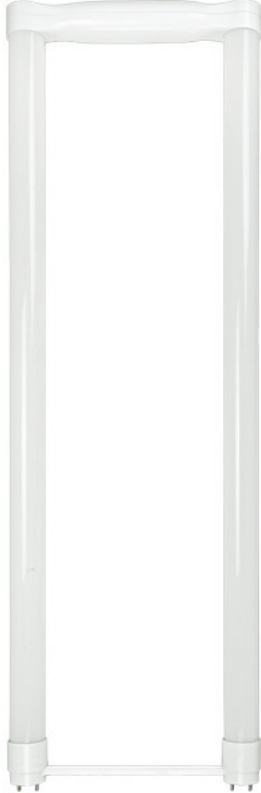

FEATURES

- Meets DLC performance and efficiency criteria
- Equivalent to a 32-Watt fluorescent U-Bend
- Frosted glass lens evenly diffuses light
- DLC® No. PLTSP14214
- UL listed for use in damp locations
- 4000 Kelvin cool white color
- Bi-Pin G13 base

APPLICATIONS

- Office spaces and conference rooms
- Classrooms and hallways
- Hospitals and lobbies

❖ For use with non-shunted sockets only



SKU#	Kelvin	Lumens	CRI	Wattage	Voltage	DLC?	Base	Life Hours	Warranty
LEDT-10069CS	4000	2200	82	18	120-277	YES	Bi-Pin	50,000	5 Year

SPECIFICATIONS

DIMMABLE	NO	LUMENS	2,200
DLC LISTED	YES	VOLTAGE	120-277
SAFETY RATING	UL DAMP	LENS	FROSTED GLASS
CRI	82	LEG SPACING6 INCH
COLOR	COOL WHITE	BALLAST TYPE	BALLAST BYPASS
COLOR TEMPERATURE	4000K	DIAMETER	8.02 IN.
LIFE HOURS	50,000	LENGTH	22.425 IN.
WATTAGE	18 WATTS	FLUORESCENT EQUAL.....	32 WATT