

## DESCRIPTION

Featuring a low-profile design, this 100W round LED high bay is a cost-effective solid state solution for high bay applications, providing a one-for-one replacement of 250 Watt metal halide fixtures.

## FEATURES

- Up to 135 LPW ultra-high efficiency delivers superior performance over older HID high bays
- 0-10V dimming
- Instant-on with no warmup
- 6kV surge protection
- 6' power cord w/o plug standard for more installation flexibility
- Provides direct and indirect lighting, meaning that it directly lights the floor below and indirectly lights the ceiling above

## LISTINGS

- IP65 Rated
- UL Listed for wet locations
- DesignLights Consortium® 5.1 Standard - meets the requirements for the highest DLC qualification for efficacy and lumen maintenance; DLC PN - PLTSN111421RP

## PERFORMANCE

- CRI: >80
- CCT: 4000K
- Rated lifetime L70: 50000 hours
- Sosen driver

## THERMAL

- -40°F to 122°F (-40°C to 50°C) operating temperature

## ELECTRICAL

- THD:  $\geq 0.9$
- Power Factor:  $\leq 20\%$
- Input Voltage: 120-277V
- Surge Protection: 6kV

## INSTALLATION

- Dimmable power supply (0-10V)
- Suspended mounting with included 10mm ring or surface mounting with u-bracket (sold separately); see installation instructions for more information

## CONSTRUCTION

- Ships standard with impact resistant polycarbonate lens & reflector (90°)
- Slim, lightweight die-cast aluminum construction (6.94 lbs) allows for quick and easy installation
- 18-gauge power conductors (Line, Neutral, and Ground)
- 22-gauge control conductors (DIM +, DIM -, AUX)

project name	type
catalog number	
comments	voltage
approved by	date



## WARRANTY

- 5 year limited warranty; see [pltsolutions.com](http://pltsolutions.com) for warranty details

## APPLICATIONS

- Warehouses
- Manufacturing Plants
- Distribution Centers
- Grocery Stores
- Gymnasiums
- Indoor Recreational Facilities
- Cold Storage
- Big Box Retail
- Service Repair Centers


## PERFORMANCE SUMMARY

Item #	Model	Watts	Lumens	LPW	CCT	CRI	Dimming	Voltage	Replaces	DLC #	DLC Rating
PLTS-11992	Round High Bay w/ Reflector	100	13,502	135	4000K	>80	0-10V	120-277V	MH250	PLTSN1114Y1	DLC Standard 5.1

## MOUNTING ACCESSORIES

SKU	Description
PLTS-12378	Adjustable U-Bracket - Black

## DIMENSIONS

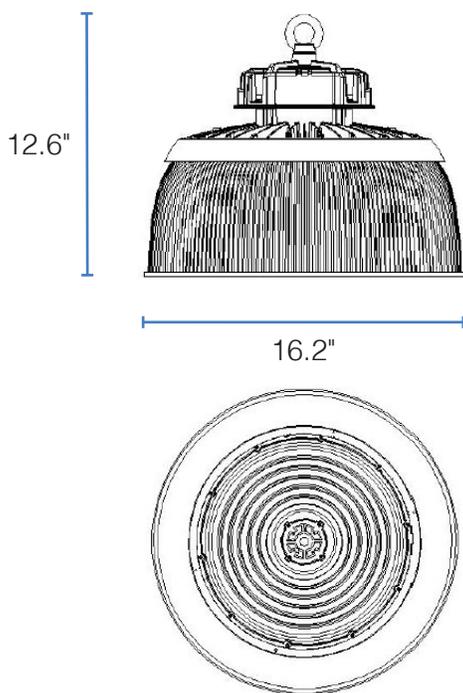

### DIMENSIONS

Height: 6.7"

Diameter: 11.8"

Weight: 5.1 lbs.

### DIMENSIONS W/ REFLECTOR

Height: 12.6"

Diameter: 16.2"

Weight: 6.94 lbs.

Ring Mount Thread Size: 10MM