



**DESCRIPTION**

Replace existing metal halide bollards with these energy efficient color and wattage selectable LED bollards.

**FEATURES**

- Light output varies depending on the wattage and color temperature selected; see Selectable Table for full breakdown
- Modern, decorative look fits all aesthetics
- Comes with mounting hardware, including square mounting plate, washers, and bolts
- Anchor bolt holes are spaced 3.94" apart on square mounting plate.
- Includes 3.94' power cord
- 0-10V dimming
- Lens panels can be replaced
- Wattage and color temperature can be adjusted using the dip switches underneath the removable head; see installation instructions for more information

**LISTINGS**

- UL rated for wet locations
- IP65
- IK04
- FCC

**PERFORMANCE**

- CRI: 80
- CCT: 2700K, 3000K, 3500K, 4000K, & 5000K
- Beam Angle: 360°
- LED L70 Life Hours: >54,000 hours
- Bridgelux 2835 LEDs

**THERMAL**

- -40°F to 113°F or (-40°C to 45°C) operating temperature


**ELECTRICAL**

- THD: <20%
- Power Factor: >0.9
- Input Voltage: 120-277V
- Surge Protection: 4kV
- Dimmable power supply (0-10V)

**INSTALLATION**

- Designed for installation to the ground with included hardware; see installation instructions for more information

<b>Project name</b>	<b>Type</b>
<b>Catalog number</b>	
<b>Comments</b>	<b>Voltage</b>
<b>Approved by</b>	<b>Date</b>

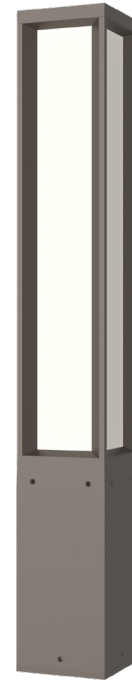

**WARRANTY**

- 5-year limited warranty; see [pltsolutions.com](http://pltsolutions.com) for warranty details

**APPLICATIONS**

- Walkways
- Entrance Ways
- Sidewalks

**CONSTRUCTION**

- Corrosion-resistant aluminum housing
- Durable polyester bronze powder coating withstands demanding environments
- Polycarbonate lens resists yellowing

## PERFORMANCE SUMMARY

Item #	Shape	Watts*	CCT*	CRI	Dimming	Voltage	Lens	Replaces	Default Settings
PLT-13717	Square	14W/19W/24W	2700/3000/3500/4000/5000	80	0-10V	120-277V	Panel	100W MH	24W/5000K

\*See Selectable Table for full breakdown

## SELECTABLE TABLE

Wattage	CCT	Lumen	LPW
14	2700	1120	80
	3000	1190	85
	3500	1190	85
	4000	1260	90
	5000	1190	85
19	2700	1520	80
	3000	1615	85
	3500	1615	85
	4000	1710	90
	5000	1615	85
24	2700	1920	80
	3000	2040	85
	3500	2040	85
	4000	2160	90
	5000	2040	85

## DIMENSIONS

Height – 43.7"

Height of Light Portion – 31.59"

Height of Base Portion – 12.2"

Width – 6.3"

Weight – 13.7 lbs

