

# LED

## Panels

# PLT &



### FEATURES


- Equipped standard with a 0-10V continuous dimming driver that's compatible with 0-10V controllers/dimmers
- Unique optics guide plate controls glare and provides uniform light distribution
- Long life, 60,000 hour LEDs at L80 reduce life cycle maintenance costs
- Low profile aluminum housing, 2" depth including transformer panel
- Fits standard T-Bar and narrow grid drop ceiling
- ETL damp location rated



SKU #	Kelvin	Lumens	Size	Wattage	Voltage	DLC?	Mounting	Life Hours	Warranty
-------	--------	--------	------	---------	---------	------	----------	------------	----------

PLTG1212	4000	4413	2x2	40	120-277	YES	CEILING	60000	5 years
----------	------	------	-----	----	---------	-----	---------	-------	---------

## ADDITIONAL PHOTOS

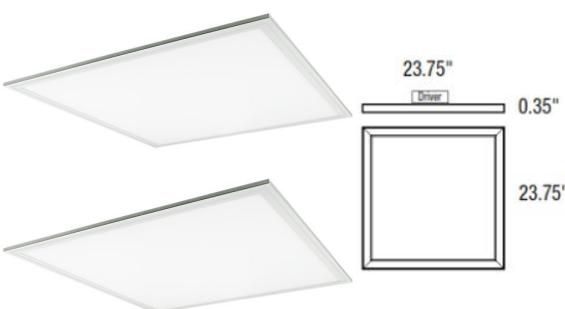

2' x 2' Edge-Lit LED Panel  
Width: 23.75"  
Length: 23.75"  
Height: 0.35"  
2.35" w/ Driver mounted



## FEATURES

- Extruded aluminum housing
- Smooth opalescent acrylic lens
- Suspended/surface mounting accessories sold separately

## TYPICAL APPLICATIONS

- Schools, Factories, Hotels
- Office, Conference Rooms
- Hospitals

## WARRANTY

**Warranty**

**5 Years**

## SPECIFICATIONS

Dimmable .....	Yes
DLC Listed .....	Yes
Safety Rating .....	ETL
CRI .....	80
Color.....	Cool White
Color Temperature.....	4000 Kelvin
Life Hours .....	60,000
Wattage .....	40 Watt
Lumens.....	4413
Voltage .....	120-277
Finish.....	White
Housing .....	Aluminum
Mounting .....	Ceiling Grid Mount
Lens .....	Opaque
Length .....	23.75 in.
Height .....	0.35 in.
Width .....	23.75 in.
Weight.....	7.5 lbs.
Warranty.....	5 Years