



COLOR/WATTAGE SELECTABLE HIGH OUTPUT LED PS30 LAMPS

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

WARNING

- Installation, service, and maintenance of luminaires should be performed by a qualified licensed electrician.

CAUTION

- Install this lamp only in the luminaires that have the construction features and dimensions shown in the photographs and/or drawings and where the input rating of the retrofit lamp does not exceed the input rating of the luminaire.
- Use in portable luminaire in which the distance from the bottom of the base to the top of the lampholder does not exceed three (3) times the minimum base diameter.
- Not for emergency lighting.
- Remove external ballast prior to installation to prevent damage to bulb.
- Use only with a portable table lamp that is provided with a shade.
- Do not make or alter any open holes in the wiring enclosure or electrical components during installation.
- The added weight of the lamp may cause instability of a free-standing portable luminaire.
- THE RETROFIT LAMP IS ACCEPTED AS A COMPONENT OF A LUMINAIRE WHERE THE SUITABILITY OF THE COMBINATION SHALL BE DETERMINED BY AUTHORITIES HAVING JURISDICTION. PRODUCT MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN IN ACCORDANCE WITH THE APPLICABLE AND APPROPRIATE ELECTRICAL CODES. THE INSTALLATION GUIDE DOES NOT SUPERSEDE LOCAL OR NATIONAL REGULATIONS FOR ELECTRICAL INSTALLATIONS.
- Attach the modification sticker in the retrofitted luminaire where readily visible by the user during normal maintenance, including re-lamping.
- Do not use the LED lamp in environments where smoke, sulfur, or corrosive substances are present. If being used in these environments, the lamp must be protected by an enclosed compartment with dimensions no less than the sizes listed in the chart below. The compartment lens should be glass, semi-glass, or semi-metallic, and should have no coverings on the surface, such as insulation, that could potentially block heat dissipation.

SKU	PLT-13636 PLT-13637	PLT-13638 PLT-13639
Max. Power (W)	34	41
Min. Compartment Size (Inches)	8x11.02	8x11.02

NOTICE

- Suitable for damp locations.
- PLT-13636 and PLT-13638 have an E26 base.
- PLT-13637 and PLT-13639 have an EX39 base.



COLOR/WATTAGE SELECTABLE HIGH OUTPUT LED PS30 LAMPS

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

Installation Instructions

1. Turn OFF power from both the wall switch and the AC main power supply.
2. Unscrew and remove the existing CFL, metal halide, or high-pressure sodium bulb from the fixture, if applicable. Bypass/remove any ballasts and ignitors (Figure 1 and 2).

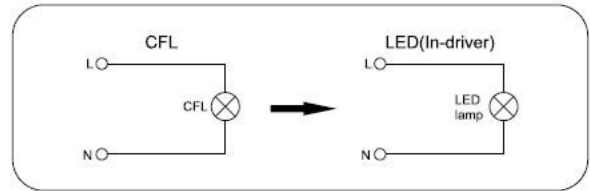


Figure 1


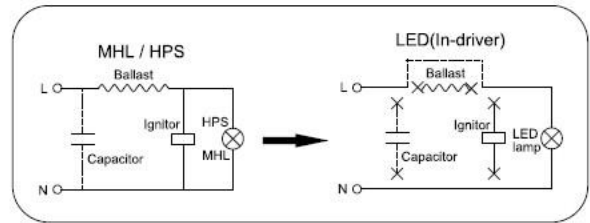


Figure 2

3. Install the new LED bulb into the fixture (Figure 3 and 4).
4. Before returning power to the fixture, select the desired CCT and wattage (see CCT and Wattage Selection section).
5. Turn the power back on. Installation is complete.



PLT-13636 & PLT-13638




PLT-13637 & PLT-13639

Figure 3

Figure 4

CCT and Wattage Selection

Select from three independently adjustable wattage and color temperature settings by sliding the two switches located on the base of the bulb to your desired settings.



CCT-selectable Switch

Wattage-selectable Switch

Maximum Rated Wattage	Wattage Selections
34W	21W 28W 34W
41W	28W 34W 41W



COLOR/WATTAGE SELECTABLE HIGH OUTPUT LED PS30 LAMPS

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

⚠ WARNING

- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards, read all warnings and instructions included with and on the fixture box and all fixture labels.
- Proper grounding is required to ensure safety.
- Power must be turned off at the breaker before installation or maintenance.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Wear gloves and eye protection at all times while installing, servicing, or performing maintenance on the luminaire, and avoid direct eye exposure to the light source while it is on.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not install damaged product. Inspect luminaire for damage that may have occurred during transit. If damaged, contact the manufacturer immediately.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purposes, contact the manufacturer.

⚠ ADVERTENCIA

- Antes de instalar, reparar o realizar el mantenimiento de rutina de este equipo, siga estas precauciones generales.
- Para reducir el riesgo de muerte, lesiones personales o daños a la propiedad por fuego, descarga eléctrica, caída de piezas, cortes / abrasiones y otros peligros, lea todas las advertencias y instrucciones incluidas con y en la caja del dispositivo y todas las etiquetas del dispositivo.
- Se requiere una conexión a tierra adecuada para garantizar la seguridad.
- Se debe apagar la energía en el disyuntor antes de la instalación o el mantenimiento.
- Este producto debe ser instalado de acuerdo con el código de instalación aplicable por una persona familiarizada con la construcción y operación del producto y los peligros involucrados.
- Utilice guantes y protección para los ojos en todo momento durante la instalación, el servicio o el mantenimiento de la luminaria, y evite la exposición directa de los ojos a la fuente de luz mientras está encendida.
- Para evitar daños o abrasiones en el cableado, no exponga el cableado a bordes de láminas de metal u otros objetos afilados.
- No instale un producto dañado. Inspeccione la luminaria en busca de daños que puedan haber ocurrido durante el tránsito. Si está dañado, comuníquese con el fabricante de inmediato.
- Estas instrucciones no pretenden cubrir todos los detalles o variaciones en el equipo ni proporcionar todas las posibles contingencias a cumplir en relación con la instalación, operación o mantenimiento. Si desea obtener más información o si surgen problemas particulares que no están suficientemente cubiertos para los propósitos del comprador o propietario, comuníquese con el fabricante.