



LED LAMPS

ProLED[®] **JC BA15s (Bayonet) Series**



Energy Saver



Omnidirectional



IP65 Rated

20 times the life and 88% more efficient than a 20W Halogen JC



IP65 Rated Options for Outdoor Use

10-18V Range Eliminates Voltage Drop Calculation

20-Year Lamp Warranty if Installed in Sollos Fixtures (for IP65 Rated Versions)

Applications:

Landscape
Accent
Display
Hospitality
Retail

Markets:


Outdoor
Commercial
Residential

ProLED®


JC BA15s (Bayonet) Series

Specifications

- JC10 & JC20 with BA15s (Bayonet) bases
- Available in 3000K CCT
- 82 CRI for quality and consistent color rendering
- 5-Year Limited Warranty on IP65 Rated and 2-Year on standard 20,000 hour lamps

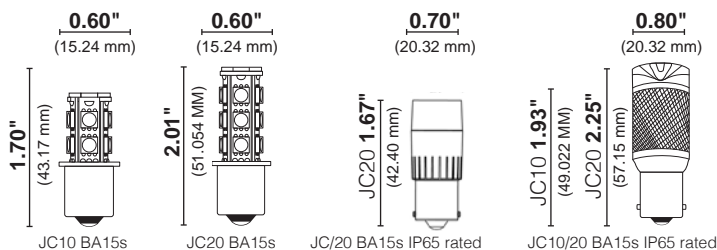

Savings Comparison

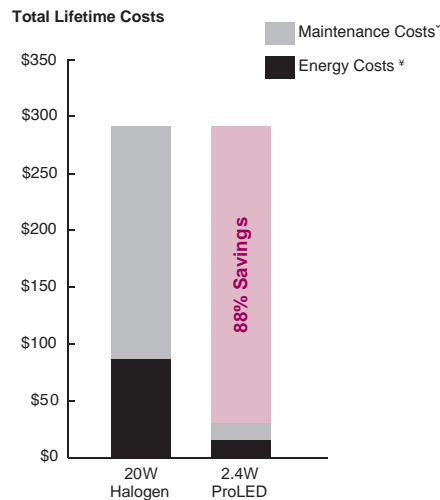

† Maintenance costs based on 15 minutes at \$40 per/hr
 * Energy costs based on \$0.11 kWh

Ordering Information

	Watt	Base	Product #	Product Code	Description	Volts	Color Temp.	CRI	Lumens	Useful Life*	Pkg. Qty.	MOL	Equivalent Wattage
JC10													
	1.5	BA15s	80692	JC10/1WW/BA15S/LED	Omnidirectional	10-18	3000	82	150	20,000	1/40	1.70"	10
	1.5	BA15s	80810	JC10/1WW/BA15S/LED2	IP65 Rated	10-18	3000	82	100	40,000	1/10	1.93"	10
JC20													
	2.4	BA15s	80691	JC20/2WW/BA15S/LED	Omnidirectional	10-18	3000	82	250	20,000	1/40	2.01"	20
☼	2.3	BA15s	81100	JC20/2WW/BA15S/LED2	IP65 Rated	10-15	3000	82	250	40,000	1/10	2.00"	20
	2.5	BA15s	80775	JC20/2WW/BA15S/LED2	IP65 Rated	10-18	3000	82	140	40,000	1/10	2.25"	20

NEW ITEM

☼ Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels.

Warranty – Commercial / Industrial: IP65 Rated JC lamps backed by a 5-Year Limited Warranty from the date of purchase; standard JC lamps backed by a 2-Year Limited Warranty from date of purchase; both warranties based on 10 hours of use per day.

May not be compatible with all electronic transformers.

Not for use in enclosed fixtures. Suitable for use in sealed metal landscape fixtures; standard JC lamps require protection from elements.

* Energy savings based on \$0.11 kWh over the life of the ProLED lamp.

† IP65 rated lamps are rated for use outdoors where exposed directly to water from rain or irrigation. The lamp is not submersible nor for use in enclosed fixtures. Suitable for use in sealed metal landscape fixtures.



This lamp can be used in Sollos Landscape Lighting products