

6" LED Downlight Kit

features

- Integrated LEDs reduce energy consumption up to 80%
- Fits many popular 6" recessed downlight fixtures
- Integrated white trim with both medium base (E26) and GU24 socket adapters (included) for direct replacement
- Lifetime exceeds 35,000 Hrs.
- Lasts up to 20X longer than incandescent
- Choice of 2700K, 3000K, & 4000K color temperatures
- Instant-on, no warm up time

12,16
&19
watt

35,000
hours

GU24/
E26
base

80/90
CRI



performance

- 12W 80 CRI equivalent to 60W incandescent
- 16W 90 CRI equivalent to 60W incandescent
- 19W 80 CRI equivalent to 75W incandescent
- Long life: 35,000+ hours
- 80/90 CRI
- 95° Beam Angle
- Dimmable to 10%
- ENERGY STAR® Certified
- UL Damp Location Listed


applications

- Healthcare
- Hospitality
- Office
- Property Management
- Residential
- Retail



6" LED Downlight Kit

dimensions

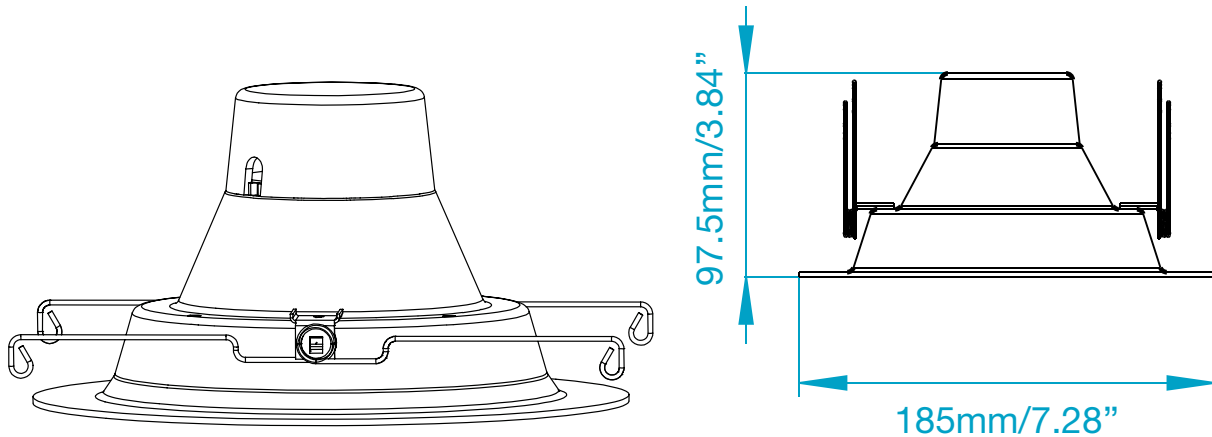

products

	ES	Litespan Part #	Order Code	Description	Lumens	CRI	Base	Equiv. to Std. Lamp by Lumen	Rated Hours
12W	★	LED-DK6-12W827K-DIM-G4	90007	12W, 6" Downlight Kit, dimmable, 2700K	750	80/90	E26/GU24	60W	35,000
	★	LED-DK6-12W830K-DIM-G4	90006	12W, 6" Downlight Kit, dimmable, 3000K	750	80/90	E26/GU24	60W	35,000
	★	LED-DK6-12W840K-DIM-G4	90005	12W, 6" Downlight Kit, dimmable, 4000K	750	80/90	E26/GU24	60W	35,000
16W	★	LED-DK6-16W927K-DIM-G4	90004	16W, 6" Downlight Kit, dimmable, 2700K	800	80/90	E26/GU24	60W	35,000
	★	LED-DK6-16W930K-DIM-G4	90003	16W, 6" Downlight Kit, dimmable, 3000K	850	80/90	E26/GU24	60W	35,000
19W	★	LED-DK6-19W827K-DIM-G4	90002	19W, 6" Downlight Kit, dimmable, 2700K	1200	80/90	E26/GU24	75W	35,000
	★	LED-DK6-19W830K-DIM-G4	90001	19W, 6" Downlight Kit, dimmable, 3000K	1200	80/90	E26/GU24	75W	35,000
	★	LED-DK6-19W840K-DIM-G4	90000	19W, 6" Downlight Kit, dimmable, 4000K	1200	80/90	E26/GU24	75W	35,000

★ ENERGY STAR® Certified

watch > like > follow



6" Downlight Kit

Ordering Code	Watts	Volts	Base	Lumens	MOL	MOD	Life Hours
LED-DK6-12W827K-DIM-G4	12	120	Medium Screw (E26)	750	3.84/97.5	7.28/185	35000
LED-DK6-12W830K-DIM-G4	12	120	Medium Screw (E26)	750	3.84/97.5	7.28/185	35000
LED-DK6-12W840K-DIM-G4	12	120	Medium Screw (E26)	750	3.84/97.5	7.28/185	35000
LED-DK6-16W927K-DIM-G4	16	120	Medium Screw (E26)	800	3.84/97.5	7.28/185	35000
LED-DK6-16W930K-DIM-G4	16	120	Medium Screw (E26)	800	3.84/97.5	7.28/185	35000
LED-DK6-19W827K-DIM-G4	19	120	Medium Screw (E26)	1200	3.84/97.5	7.28/185	35000
LED-DK6-19W830K-DIM-G4	19	120	Medium Screw (E26)	1200	3.84/97.5	7.28/185	35000
LED-DK6-19W840K-DIM-G4	19	120	Medium Screw (E26)	1200	3.84/97.5	7.28/185	35000

NOTES: